



قانون تنظيم البناء في القرى والحدائق حيث لا توجد قواعد تخطيط

Saturday

Date: 2 Rajab 1440 – 9 March

Number: 1013

Volume:

Case No.: -1002R2019/

Rules on how to build in villages or forests where there are no
planning rules

Requests for publication of the rules and regulations in the
Gazette should be sent to mv.gov.po@legalaffairs.e

Office of the President,
Great Thakur
Road, MALAYSIA

Phone: 3336102 3336211

Fax: 3310274

Website: mv.gov.gazette.www



Ministry of National Planning and Infrastructure

Mall,e

Dhvehirahje.e

Rules on how to build in villages or forests where there are no planning rules

CHAPTER ONE

begin

Building in rural or forest areas where there is no planning rule (h) .1 Introduction and Name
A rule has been made under Article 95(h)(12) of Act No. 4/2017
(Construction Act).

This rule shall be called the "Rules on Building in Villages or Forests (j)
Where There Is No Planning Rule"

The purpose of this rule is to achieve the following .2 The purpose

prescribing the criteria for determining the height of buildings in rural areas (h)
or forests where there are no planning regulations;.

making buildings safe in villages or forests where there are no (j)
planning regulations; Designed to promote healthy health and

(a) Action to be taken against persons who violate the provisions of this Regulation

Describe the measures and, identify and describe the action takers.

- This Regulation shall be implemented by the Government Ministries then entrusted with the responsibility of implementing the policies relating to construction and by the agencies designated by the Ministry to issue various permits relating to construction .3 Rule enforcement officer
- These rules shall come into force on the expiry of 60 (sixty) days from the date of publication in the Government of Dhaka Gazette .4 Effective date of the regulation
- Unless the context otherwise requires, the words and phrases used in these rules shall have the meanings set forth below .5 Definition
- "Ministry" means the Government Ministry then entrusted with the responsibility of implementing the relevant policies (h)
- Construction Policies "Minister" means the Minister responsible for the implementation of the Government Ministry then entrusted (j)
- (a) "Forest" means the area from the creek to the outskirts of the forest or the area around the forest and hills
- "City" means a town or administrative area designated as a city by the Government (r)
- "Development Control" means the planning standards for the site under construction (b)
- "Land" means land of the Bandara and private land.e (g)
- "Road" means the main road or street or road adjacent to the building or the road leading to the divided lot (a)
- "Road width" means the width of the road from the front of the building permitted site to the other side of the road (h)

to the street boundary of the land or premises

"Building footprint" means the area of land including the ground floor, (v)
excluding the vacant space left unbuilt on the ground floor

"Building width coefficient" means the exact length outside the building (m)
minus the area of the building. Width coefficient =

$$\times \text{Area} \frac{1}{\text{Exact maximum length}}$$

(1) The calculations in this Article shall be made in meters but the area of the
building shall be expressed in square metres

(2) If the width coefficient of the building cannot be obtained due to the
coefficient of dimensions of a plot or premises, the width
such plot or premises and the maximum height of the building shall
be determined by the Ministry

"Opening" means openings such as windows, mouths, etc. Glass (f)
blocks for lighting only or non-opening glass, drawers and windows
(sliding doors and windows).
part will not be included.e

should be kept construction means that the rules "Building Code" in (d)
set out the standards.e

"Compliance Document" means the documents comprising the (t)
construction containing the relevant rules and standards under the
Building Code

"Ramp" means a wooden floor used to ascend and descend from a (l)
high place

"Construction Act" or "Act" means the amendments to the Act (c)
4/2017 (Building Act) and the amendments thereto

CHAPTER II Construction Practice

Except for a building constructed on land allocated for residential purposes (h) .6 Development Controller
in accordance with these rules, the building shall be designed as described Design the building
in this chapter and after obtaining development control from the designated accordingly
development controller at the places described by the Ministry
Similarly.e

(1) 18.5 per cent of the land allocated for residential purposes in residential areas other than those designated as cities

(eighteen point five) meters in height;

(2) for buildings exceeding 30.48 (thirty point forty-eight) meters in height on land allocated for residential purposes in residential areas

designated as cities;

(3) for construction on land allocated by the Government for development for various purposes;

(4) for construction on land designated as industrial zone or economic zone;

(5) for construction in villages other than residential villages;

(6) for construction on farms;

The development control referred to in (h) of this Article shall include the (j)
height of the building, vacant space and parking
standards.e

(a) Notwithstanding subsection (h)(5) of this section,

1 (one) storey sheltered by a roof not exceeding 6 (six) meters in height, not exceeding 1200 (one thousand two hundred) acres, for the purpose of maintaining the premises in the villages allocated for non-residential purposes

The building does not have to comply with the development control prescribed
by the Ministry

The building of the premises referred to in Article 6(h) of these Rules (h) .7 Construction of the
shall be constructed in accordance with the other planning standards
prescribed in these Rules

Rules If the development control referred to in Article 6(g) of these (j)
specifies the rules and standards to be observed in construction, those
standards shall be observed in the design of the building i as described
Related other in the formulated rules to do so.e

that

CHAPTER THREE

The height at which a building can be constructed on residential land

A building constructed on land allocated for residential purposes other than .8 Height of buildings
those designated as cities In other on land allocated for
villages, the roofbeam or terrace slab or deck from the yard residential
The height of the building shall be determined as described below purposes other than the city

If the area is less than 100 (one hundred) acres or the footprint of (h)
the building is narrower than 1.829 (one point eight two nine) meters
or 6 (six) feet, a building is more than 1 (one) story or 6 (six) meters
high cannot be done.e

If the footprint of the building is less than 600 (six hundred) acres, (j)
the maximum height of the building shall be 10.5 (ten point five)
meters or 34.449 (thirty-four point four four nine) feet

(n) If the footprint of the building exceeds 600 (six hundred) acres or
exceeds 600 (six hundred) acres, the maximum height of the
building shall be 18.5 (eighteen point five) meters or 54.134 (fifty-
four point one three-four). feetv.e

When building on land allocated for residential purposes in residential areas designated as cities, the height of construction from the gate to the top of the roofbeam or terrace slab or deck shall be determined as follows

.9

Height of buildings on
land allocated for
residential purposes in cities

If the footprint of the building is less than 100 (one hundred) acres or the width coefficient of the building is less than 1.829 (one point eight two nine) meters or 6 (six) feet, no building shall be constructed higher than 1 (one) floor (h)

If the footprint of the building is less than 800 (eight hundred) acres, the footprint of the building shall be determined as the height at which the building can be built. The lowest of the heights calculated based on the width coefficient of the building and the width of the access road to the building.e (j)

(n) Determine the maximum height of the building based on the width coefficient. If the width coefficient of the building is less than seven tenths of the square root of the area of the building

The details of the notice are given in Table 1 of these Rules

The formula for calculating the height in this way is a-i

$$1.2 + 0.3875 \times \left[\frac{\text{Width coefficient of the building}}{0.7} \right]^2 = \text{Maximum building height}$$

The maximum height of the building shall be determined by the footprint of the building if the width coefficient of the square root of the footprint is greater than or equal to seven-tenths of the height of the building Table 1 shows.e (r)

The formula for calculating the height in this way is a-i

Maximum buildable height =

$$\text{Building footprint} \times 0.3875 + 1.2$$

The height shall be determined by the width of the access road to the only building to be constructed as described below (b)

1 will be included.e

(1) If the width of the road or alley leading to the building is less than 219.1 (one point two one nine) meters or 4 (four) feet, the building shall be 1 (one) story not higher than 6 (six) metres

(2) 1.219 in the width of the road or alley leading to the building (one point two one nine) meters or 4 (four) feet, 1.524 (one point five two four) meters 5 (five) feet, and 9 (nine) or meters or (thirty-one point five-three) feet in height

can be done.e

in the width of the access road or alley (3) If the building is 1.524 (one point five two four) meters or 5 (five) feet, and less than 1.829 (one point eight two nine) meters, 19.20 (nineteen point two zero) 6 (six) feet or 62.99 (fifty-two). Point nine nine) m feet high.e

alley in the width of the access road or (4) If the building is less than 1.829 (one point eight two nine) meters or 6 (six) feet, 3.048 (three point zero four eight) meters or 10 (ten) feet, 25.20 (twenty-five point two zero) meters or (eighty-two point six-eight) feet in height.e

(5) 3.048 in the width of the road or alley leading to the building or 10 (ten) (three point zero four eight) meters 30.48 (if thirty point feet, and wider, or 100 (one hundred) feet, not more than forty-eight) meters high

If we meet,a or Size of the footprint of the building 800 (eight hundred) (g)
acres If the maximum height of the building is greater than 800 (eight hundred)
acres, the width of the access road to the building and the width of the building

through of the heights Determine After considering, u considering the width
minimum for the coefficient.e

In the case referred to in (n) of this Article, the width coefficient shall be used (a)
to determine the height of the building as follows

(1) Width coefficient less than 3.0 (three), 16.5 (fourteen).

or not exceeding 54.13 (fifty-four point point five) meters one three) feet

(2) If the width coefficient is greater than 3.0 (three), the height of the building
point forty-eight) meters or 100 (one may not exceed 30.48 (thirty
hundred) feet

A building can be built according to the width of the access road (h)

The maximum height shall be determined in accordance with (b) of this Article

10. After determining the maximum height of Article 8 and 9 of these Rules, the roofbeam or
terrace slab or deck shall be constructed on a plot allocated for residential purposes

The standard of
construction from
near the top of the
roofbeam or terrace slab or deck

The standard shall be determined as described below.e

The staircase of the building and the shelter of the elevator machine room may (h)
be constructed not to exceed 4 (four) metres

Details prepared by the manufacturer required to plan the elevator Details of
section, (Manufacturers Specification) shall be submitted in
Schedule 1 to these Rules

1 (one) meter in the staircase and elevator machine room shelter of the building (i)
or a horseshoe up to 3.280 (three point two eight zero) feet

1 Details of the schedule rules are contained in the levitation of this section

(a) Additional or 4.921 from the top of the roof beam of the building for the roofing
of the building The details of this section, (four point nine two one) feet
shall be given in Table 1 of these Rules

The area of two-thirds of the terrace may be used for construction (r)
and the roof of this section shall be 0.457 (zero point four five
seven) meters or 1.499 (one point four nine nine) feet

can be extended into the terrace area.e

The height of the part lift machine room referred to in (r) of this (b)
Article shall not exceed 4 (four) metres

Antennas and dishes installed in the building for satellite (g)
communication purposes shall not be included in the height of the building
Antennas and satellite dishes installed in buildings near an international
airport shall be installed in accordance with the relevant regulations made
by the relevant government agencies

of the road The ground floor of a building erected on a land allocated for residential purposes .11 (h)
shall be 600 (six hundred) millimeters above the top layer of the ground or the courtyard of
a building The floor may be raised by not more than the measurement
to the height allowed to raise the entire building by a maximum of
600 (six hundred)
up to.e

Conditions in which the building
may be raised

Parking in the basement of the building on a residential lot (j)
For construction, if the ground floor of the building is raised above the top layer
of the road ground or the yard, the elevated level shall permit the entire building
A maximum of 5.1 may be raised to the height (one point five) meters which may be
increased in this way

From the floor of each floor of a residential building to the bottom .12 (h)
of the sheet or deck,
shall be at least 2.7 (two point seven) meters or 8.859 (eight point
eight five nine) feet

building floor height

At least 2.5 (two point five) meters from the floor of each floor to the (j)
bottom of the sheet or deck in the building used for other than
residential purposes
or 8.202 (eight point two zero two) feet

The width of the road in determining the height of the divided plot shall be the width of the main road on which the divided plot is located .13 (h) Width of the road in elevation

If you build on a street that is only accessible from one side because of the breakage of one side of the street, the width of the street shall be the width of the main street (j)

14. Where it is difficult to determine the height of the building due to the abnormal shape of the land or for various other reasons, the maximum height of the building shall be submitted to the Ministry

In cases where the height cannot be determined, a mall should be used way

CHAPTER FOUR

Allocation of vacant space in the building on the land allocated for residential purposes

If the footprint of the building on the land allocated for residential purposes is 1200 (one thousand or more, two hundred of the building) acres, 10% (ten percent) of the footprint shall be allocated as vacant space

Allocation of vacancies in the building .15 (h)

No part of the building shall be extruded into the vacant space referred to in (h) of this Article except as mentioned below (j)

0.2 (zero point two) (1) roof drainage meters or 0.656 (zero point six five six) feet from the wall of the building

can be issued.e

(2) The doors of the building to provide ventilation and light to the parts of the building

The window shutters can be opened.e

(n) This space may be used for parking purposes

CHAPTER

V Paving parts of buildings on residential land

.16 No part or place of a building constructed on a residential land shall be exposed to a road outside the boundary except in the following circumstances

Parts of the building to the road

Extraction

If the width of the road is less than 6 (six) feet, the width of the building is 2.743 (two point seven four three) meters or 9 (nine) feet above the roof of the building 0.2 (zero point two) meters or (zero point six five six) feet out on the road.e (h)

If the width of the road is wider than 6 (six) feet, 2.743 (three point seven four three) meters or 9 (nine) feet above the height of the building 0.457 (zero point four five seven) meters or 1.499 (one point four nine nine) feet from the roof of the building (j)

.17 Doors, windows and fanlight doors in the building shall open outside to the road as described below the boundary

Open the door and

window to the street

Such object shall not be located more than 2.743 (two point six and four and three) meters or 9 (nine) feet below the entrance to the road outside the boundary; (h)

Such object shall be 2.743 (two point seven four three) meters or 9 (nine) feet above the door, 0.457 meters or (one point four nine nine) feet outside (j)

unable

CHAPTER VI

Ventilation and lighting of parts of buildings on residential land

.18 A building constructed on a residential lot shall be designed to provide ventilation and light to the parts of the building as specified in this Article until the relevant compliance document of the Building Code is published and executed.e

Wind to parts of buildings

Transmission of light

In order to provide ventilation and light to the parts of a building, an opening (h) of not less than 10% (ten percent) of the floor area of each part of the building shall be located facing an unconstructed vacant space

An opening shall be deemed to allow air to flow for a distance of 6 (j) (six) meters from the opening and shall be deemed to be ventilated if the size of the opening is not less than 15% (fifteen percent) of the floor area. The side shall be ventilated at a distance of 4 (four) meters per side.e

(n) At least 600 × 600 in an unconstructed vacant space without obstruction millimeters. If such a space is adjacent to another plot, at least 750 (seven hundred and fifty) millimeters from the boundary

There should be.e

(r) No door, window, fanlight, or any opening or fixed glass of any part or part of a building constructed adjacent to the boundary of a land shall be placed in the wall adjacent to the boundary of another land. An opening or cut of any kind shall be placed on the immediate side of a plot of land at a minimum of

(seven hundred and fifty) millimeters.e

Instead of the vacant space to be left unbuilt, the road and alley (b) adjacent to the building may be used. However, when a plot is divided, a building or premises constructed on a plot other than the plot taken from the plot placing an opening

It shouldn't.e

Notwithstanding subsection (b) of this section, if the street is converted (g)
into a government street, the same treatment shall apply to such a street
as is adjacent to the land

other than residential on only 2 (two) floors of a Below For purposes (a)
building (total height of two floors, not exceeding 7.5 seven point five metres).
If the construction sites are adequately mechanically ventilated, the
building may be constructed without leaving spaces and openings as
described in (h), (j) and (n) of this section

This space shall be exposed from the beginning of the space to
the top and shall never be on the lowest floor of the building

(h) of this Article and If 2 (two) floors are used for residential either
purposes, openings and spaces shall be provided for ventilation and
light as described in (g) and (n) below

CHAPTER SEVEN

Re iling (chain) and window in building on residential lot

There should be a standard

.19 Until the compliance documents under the Building Code come into force, the
balconies, stairs and stairs of the building shall be treated as described below
railing terrace etc in the hitting

The balcony of the building
Railings (chains)
or walls on stairs
and terraces

Railings or walls on balconies and terraces in buildings shall be designed (h)
or constructed to have a height of at least 1.2 (one point two) meters or
3.94 (three point nine four) feet The balcony shall be designed or
constructed with railings or
as.e

125 (one hundred and twenty-five) in diameter from any wall space

The railing or wall shall be designed or constructed in such a way that it is safe for children to climb

Where any place or any part such as balcony or terrace of a building adjoining the boundary of a plot is placed adjacent to the boundary of another plot, a wall of at least 2 (two) meters or 6.562 (six point five six two) feet shall be erected or a barrier of that size shall be made (j)

(n) Railings (chains) shall be installed or a wall shall be erected as referred to in (h) of this Article on balconies and terraces other than those referred to in (g) of these Rules

Stairs in the building shall be designed or constructed with railings (chains) or walls with a height of at least 850 (eight hundred and fifty) mm Railings shall be designed or constructed in a manner that is safe for children (r)

Windows installed in the building at a height of 2.743 (two point seven four and three) meters or 9 (nine) feet above the ground shall be at least 1 (one) meter or 3.281 (three point two eight one) feet above the floor (b)

Notwithstanding subsection (b) of this section, windows opening to terraces and balconies may be installed more than 1 (one) meter below the floor (g)

If an orifice installed in common areas of the building above 2.743 (two point seven four and three) meters or 9 (nine) feet above the ground is capable of passing a spear of 125 (one hundred twenty five) millimeters through the orifice, such orifice shall be located at least from the floor 1 (one) meter or 3.281 (three point two eight one) feet (a)

CHAPTER VIII

Allocation of parking space in the building on the land allocated for residential purposes

.20 Parking space for building on residential land as follows

Determination of parking

shall be determined.e

If the footprint of the building is greater than 1200 (one thousand two hundred) (h)
acres and the building is higher than 5 (five) stories, 10% of the footprint of the building
(ten percent) shall be reserved for parking

The parking area on the ^{most} ground floor of the building is not compulsory, (j)
however, easy access for vehicles should be provided

(a) In determining the parking area, this area may be divided into
sections, but none of these sections shall be less than 5%
(five percent) of the footprint of the building percentage) shall
not be included.e

Parking space shall not be allocated during the construction (r)
of plots on prohibited roads

CHAPTER IX

Others

If the footprint of the building is 1000 (one thousand) acres or .21 (h)
more, at least 1.5% (one point five percent) of the footprint of
the building shall be designated as waste disposal space

Garbage disposal space

(j) When allocating space to the extent referred to in subsection (h) of this section, the size of the space
Not less than 2×2 (two times two).e

.22 If a residential plot is divided by including a street, the street shall be at least 4 (four) feet wide

Division of land

.23 Where a building or part of a building is constructed on a plot of land allocated for residential purposes other than a street house, a vacant space of at least 750 (seven hundred and fifty) millimeters wide shall be provided (seven hundred and fifty) millimeters wide spaces do not have to be filled in all directions. However, the spaces shall be accessible for cleaning such areas

Allocation of space adjacent to the land

Har,a carpenter,e.24 Saihotel, Restaurant, Cafe, Bakery, Fi

Building for non-residential purposes, on land allocated for residential purposes

A rule of procedure for applying for permits for the construction of workshops, warehouses, and other places of economic activity (fifty) days shall be made public by the Ministry.e

The Minister shall constitute a committee called the Planning Committee .25 (h) to decide on any matter not specified in the purpose of these rules or the jurisdiction of these rules by the Construction Act

Planning Committee

Planning The Committee shall determine the rules governing the operation of the Planning Committee under (h) of this Article (j)

Sets planning standards (n) The Planning Committee shall operate under the Ministry

(r) Where a policy decision is required to be taken on matters submitted to the Planning Committee, it shall take such decision on the direction of the Minister Similarly.e

For the decisions of the Planning Committee referred to in these rules (b) shall be followed.e

CHAPTER TEN

The action to be taken in case of violation of the rules

It is prohibited to leave the provisions of these rules without doing anything .26 (h) Procedure for violation of rules

If any person notices that there is a significant violation, the person shall notify the building permit issuing authority

Upon notification of a violation of this Regulation to a building permitting authority as referred to in (h) of this Article, the authority Ministry shall take any action and submit the matter to the within 30 (thirty) days If not,a (j)

(n) Information as referred to in (h) of this Article, building permit If the issuing authority receives, or the building permit issuing authority finds, a violation of the rules, it shall inspect whether such premises are in compliance with this rule

An incident in which an inspection by the building permit issuing authority under subsection (a) of this section determines that such premises are not in compliance with this regulation and the permitting authority determines that it is located in a dangerous place or if it is determined that it may occur, such place shall be treated as described below (r)

Article 27 (1) of these Rules shall notify the person to rectify the matters to be rectified within such period as may be prescribed in

In the notice in paragraph (1) of the letter,i reason and correction (2) The period given shall be stated, dated, signed and stamped

The condition of the premises shall be monitored by the licensing authority for the purposes of paragraph (1) (3).

.27 Each violation of this rule shall be subject to separate action as set forth
below

Action against violators

100,000/- (One Lakh) separately for each violation with time to (h)
rectify the matter depending on the seriousness of the matter.
shall be fined Rs.e

If the matter is not repaired within the period given for repair (j)
under (h) of this Article, 3% (three percent) of the amount of the
fine imposed under (h) of this Article shall be added to the
amount of the fine for each additional day left unrepaired

(n) If the fine payable under (h) and (j) of this Article has not been paid
and the matter has not been rectified, the case shall be referred
to the Attorney General's Office for recovery of the amount
arising from the non-payment

Table 1

This table can be used to determine the height of buildings on land allocated for residential purposes in cities if the width coefficient of the building is less than seven tenths of the square root of the building area

Maximum buildable height (in meters) ^j	Width coefficient (in meters) ^{k,s}
5.90	2,438
10.60	3,448
24.71	5,452
26.40	6,451
30.48	6,954


This table shall be used to determine the height of buildings on residential land in cities if the footprint of the building is equal to seven-tenths of the square root or greater

Maximum buildable height (in meters) ^j	Area of Plot (in acres) ⁱ
4.8	9,290
8.4	18,581
19.20	46,452
26.40	65,032
30.48	75,561


Table 3: This table can be used to determine the maximum height of buildings on residential land in cities based on the width of the access road to a building
to determine.e

The maximum height that can be built	Road width (in meters)
Buildings cannot be higher than 1 floor or 6 meters	If narrower than 1.219 m
Not more than 9 meters high	If 1.219 is equal, and 1.524 is not equal
Not more than 20 meters high	If 1.524 is equal, and 1.829 is not equal
Not exceeding 25.20 m	If 1.829 is equal, and 3.048 is not equal
Up to 30.48 m	3.048, and if wider

Drawing: 1 Raise the shelter of the staircase and elevator machine room and remove the roof

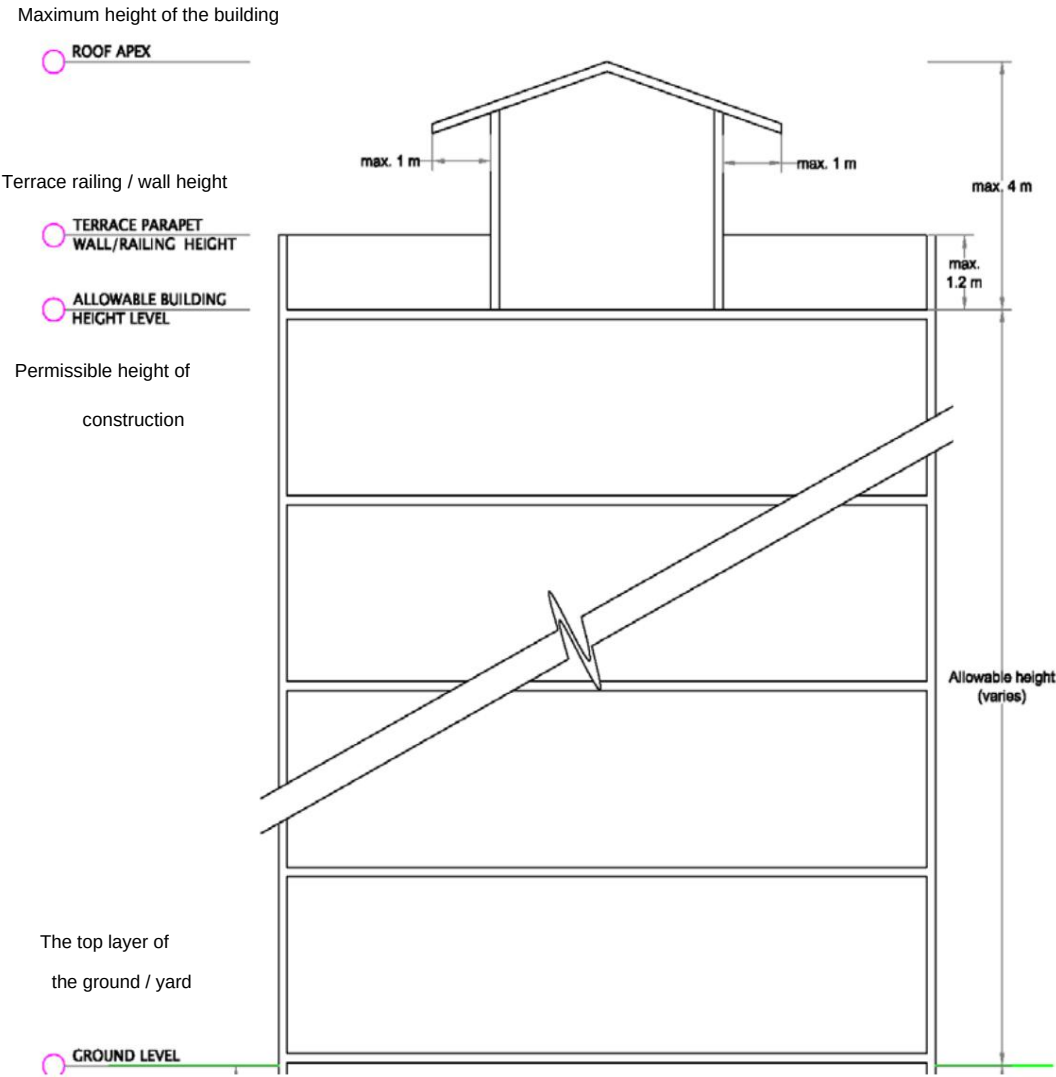

Drawing: 2 Raising and sheathing of staircase and elevator machine room shelter

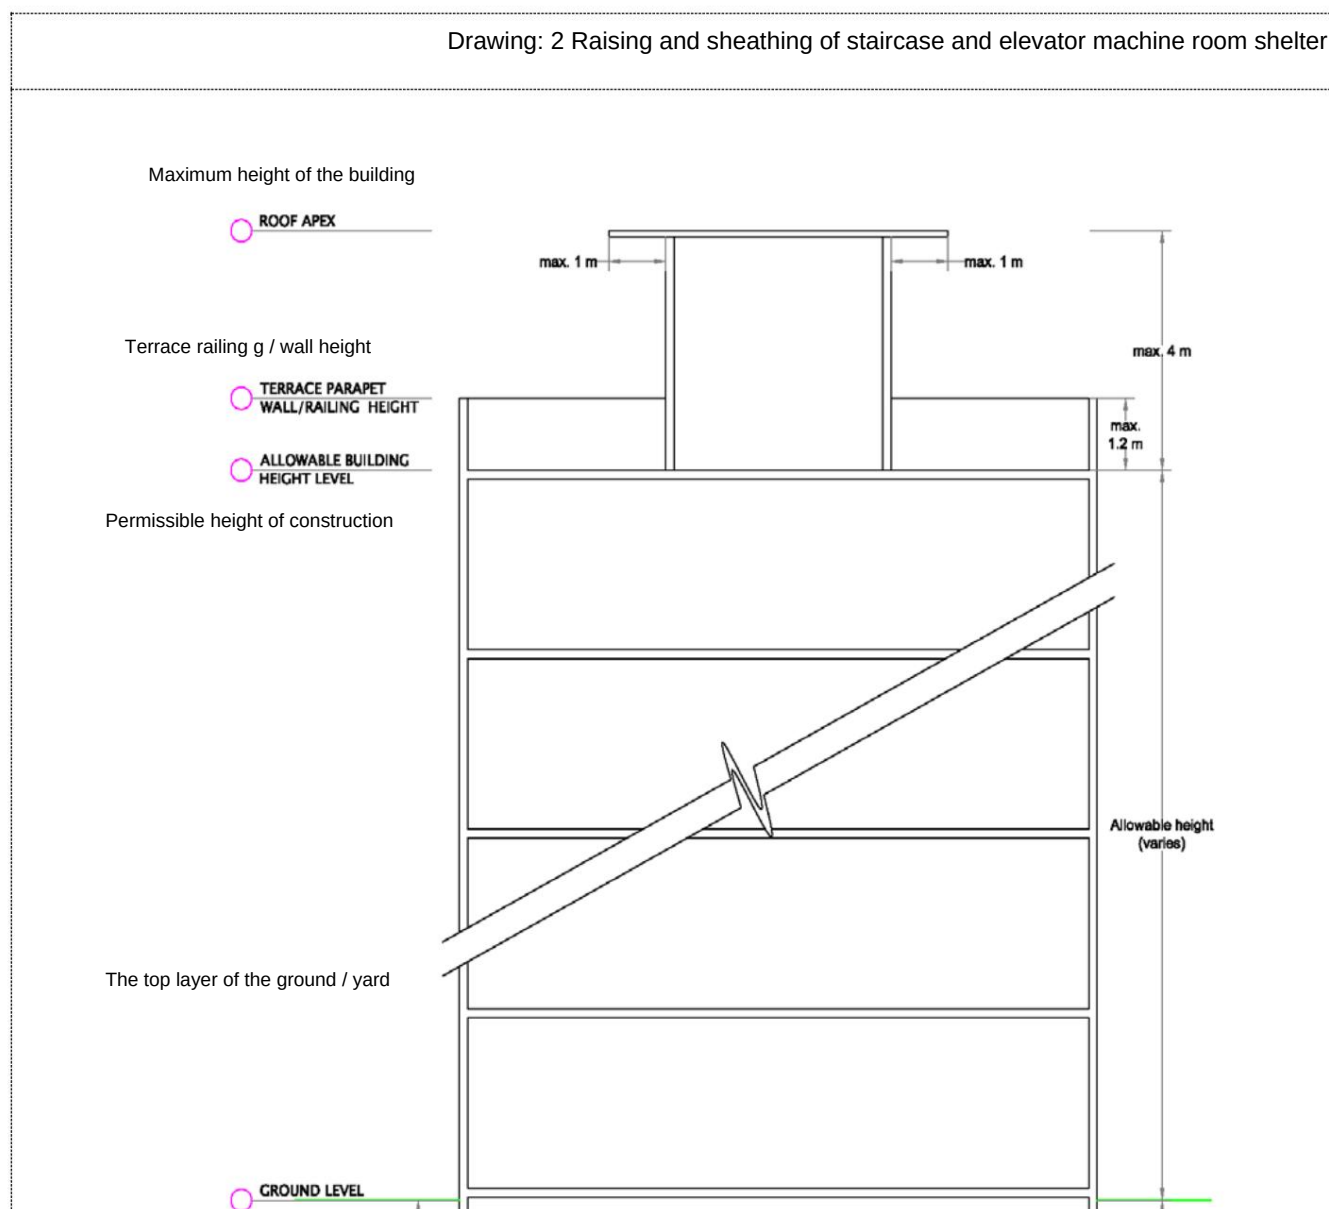

Drawing: 3 Roofing on the top of the building

