




Pump size & type / Stages : 6WXB-12A / 5
Based on curve no. : 6WX-12A / 0
Impeller diameter : 12.32 in

Customer : Oscar Molina
Item number : 1
Service : -
Flowserve reference : 4997837062
Date : August 22, 2024

Capacity : 1,250.0 USgpm
Head : 3,000.00 ft
Density / Specific gravity : - / 0.999
Pump speed : 3,540 rpm
Ns / Nss (per eye) : 1,137 / 8,810 (US)
Test tolerance : ANSI/HI 14.6 Grade 1B

CURVES ARE APPROXIMATE, PUMP IS GUARANTEED FOR ONE SET OF CONDITIONS; CAPACITY, HEAD, AND EFFICIENCY.

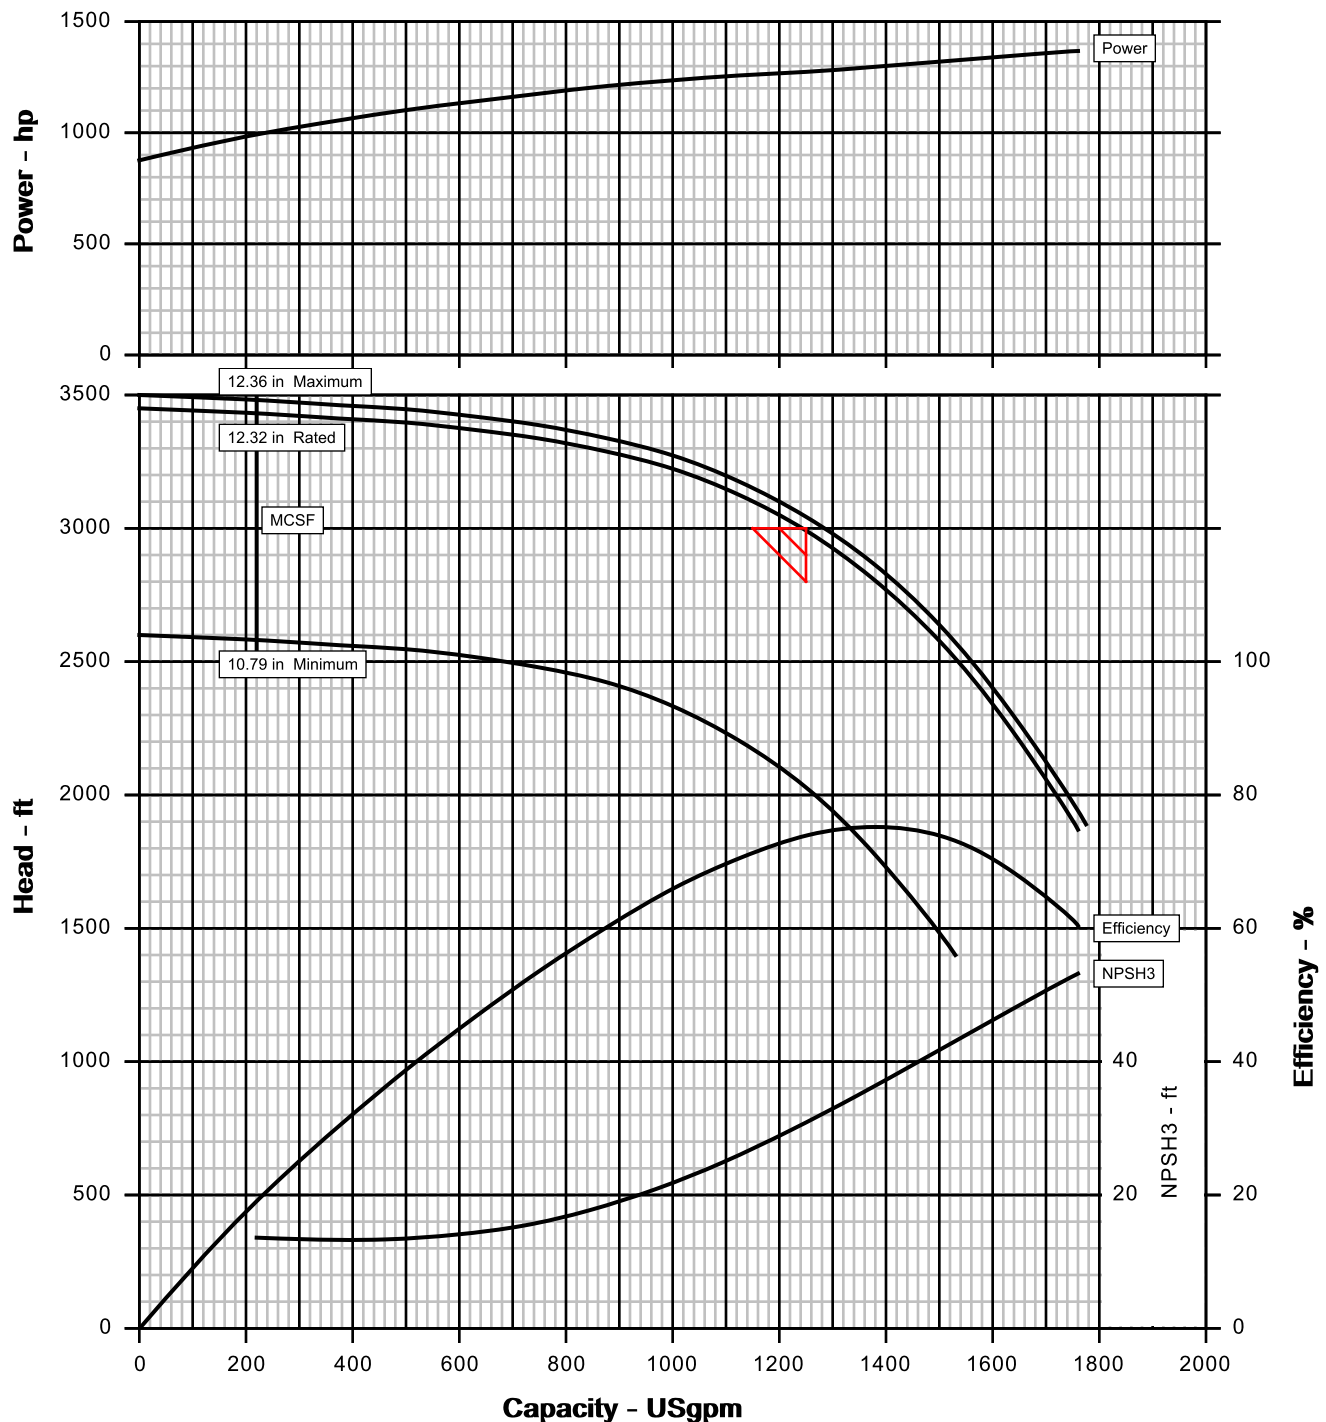


Customer	: Oscar Molina	Pump / Stages	: 6WXB-12A / 5
Customer reference	: -	Based on curve no.	: 6WX-12A / 0
Item number	: 1	Flowserve reference	: 4997837062
Service	: -	Date	: August 22, 2024

Operating Conditions		Materials / Specification	
Capacity (rated/normal)	: 1,250.0 USgpm / 1,050.0 ...	Material column code	: S-5
Water capacity (CQ=1.00)	: -	Pump specification	: -
Total developed head	: 3,000.00 ft	Other Requirements	
Water head (CH=1.00)	: -	Hydraulic selection : No specification	
NPSHa/NPSHa less margin	: 264.3 ft / -	Construction : No specification	
Maximum suction pressure	: 200.0 psig	Test tolerance : ANSI/HI 14.6 Grade 1B	
Liquid		Flow - Max % BEP : 120.0 %	
Liquid type	: Fresh water	Flow - Min % BEP : 70.0 %	
Liquid description	: -	Driver Sizing : Max Power(MCSF to EOC) using SF	
Temperature	: 60 °F	Seal configuration : non-pressurized seal	
Density / Specific gravity	: - / 0.999		
Solid Size - Actual / Limit	: - / -		
Viscosity / Vapor pressure	: 1.00 cSt / 0.26 psia		

Performance			
Hydraulic power	: 946 hp	Impeller diameter	
Pump speed	: 3,540 rpm	Rated	: 12.32 in
Pump overall efficiency (CE=1.00)	: 74.2 %	Maximum	: 12.36 in
NPSH required (NPSH3)	: 30.7 ft	Minimum	: 10.79 in
Rated brake power	: 1,276 hp	Ns / Nss (per eye)	: 1,137 / 8,810 (US)
		Minimum continuous flow	: 221.8 USgpm
Maximum brake power	: 1,374 hp	Maximum head at rated diameter	: 3,447.68 ft
Driver power rating	: 1,500 hp / 1,119 kW	Flow at BEP	: 1,387.8 USgpm
Casing working pressure	: 1,691.1 psig	Flow as % of BEP	: 90.1 %
(based on shut off @ cut dia/rated SG)		Efficiency at normal flow	: 68.1 %
Maximum allowable	: 1,885.5 psig	Impeller diameter ratio (rated/max)	: 99.7 %
Hydrostatic test pressure	: 2,828.2 psig	Head rise to shut off	: 14.9 %
Estimated rated seal chamber pressure	: -	Total head ratio (rated / max) / (max / rated)	: 98.3 % / 101.8 %


CURVES ARE APPROXIMATE, PUMP IS GUARANTEED FOR ONE SET OF CONDITIONS; CAPACITY, HEAD, AND EFFICIENCY.

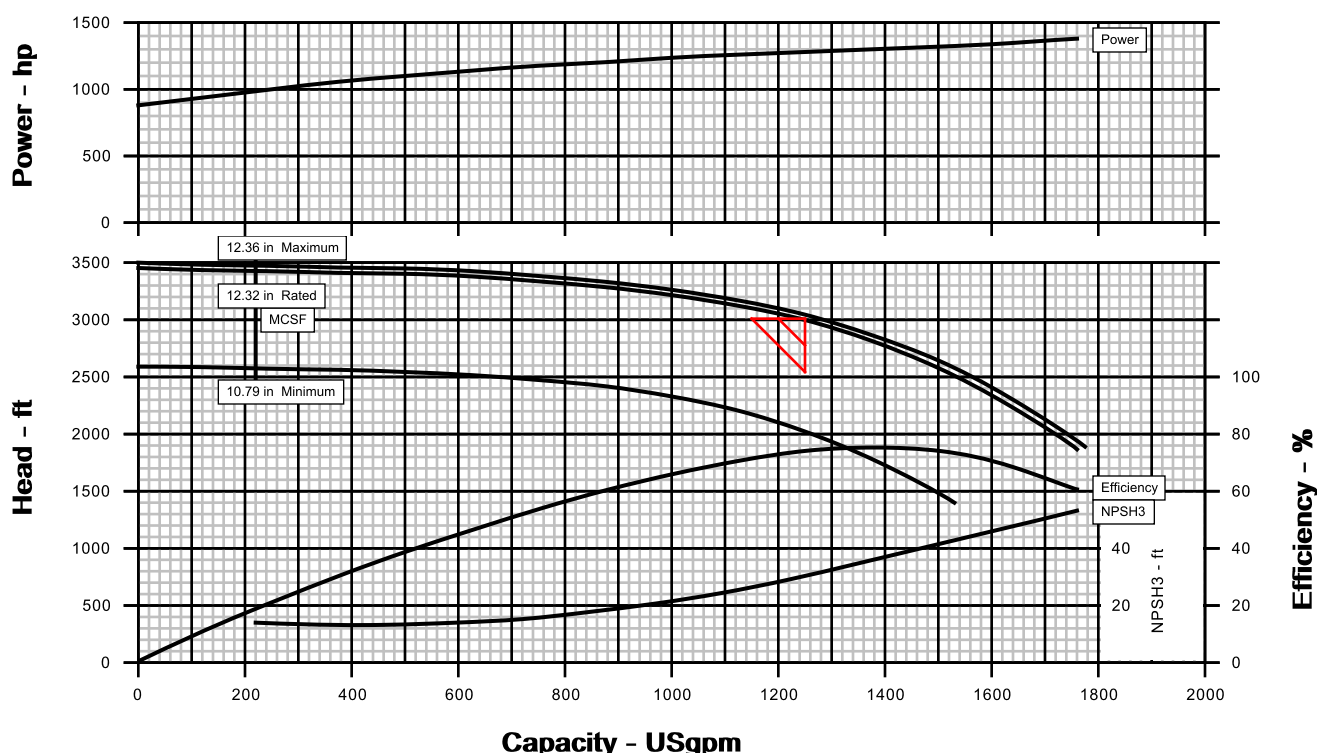

Customer : Oscar Molina					Pump / Stages : 6WXB-12A / 5	
Customer reference : -					Based on curve no. : 6WX-12A / 0	
Item number : 1					Flowserve reference : 4997837062	
Service : -					Date : August 22, 2024	
Construction					Driver Information	
Nozzles	Size	Rating	Face	Position	Manufacturer	-
Suction	150. mm	-	-	Top	Power	: 1,500 hp / 1,119 kW
Discharge	150. mm	-	-	Top	Service factor (requested / actual)	: 1.0 / -
Casing mounting : Center-line					Synchronous speed	: 3,600 rpm
Casing split : Radial					Orientation / Mounting	: Horizontal / Foot
Impeller type : Closed					Driver type	: IEC
Bearing type (radial) :-					Frame-size / material	: - / -
Bearing number (radial) :-					Enclosure	: -
Bearing type (thrust) : 2 Ball					Hazardous area class	: -
Bearing number (thrust) : 7315 BECBJ					Explosion 'T' rating	: -
Bearing lubrication : Flood					Volts / Phase / Hz	: 460 / - / 60 Hz
Rotation (view from coupling) :-					Amps-full load/locked rotor	: - / -
Materials					Motor starting	: Direct on line (DOL)
Casing : 1.0619 / A216WCB					Insulation	: F
Impeller : 1.0619 / A216WCB					Temperature rise	: -
Case wear ring : 1.4021 / A276-420					Bearings	: -
Impeller wear ring : 1.4021 / A276-420					Lubrication	: -
Inducer :-					Motor mounted by	: -
Shaft : 1.7225 / A322Gr.4140					Sound Pressure (dBA @ 1.0 m)	
Sleeve : 1.4436 / A276-316Ti					Driver, expected	: -
Baseplate, Coupling and Guard					Pump & driver, estimated	: -
Baseplate type :-					Seal Information	
Baseplate material :-					Arrangement	: -
Coupling manufacturer :-					Size	: 70 mm 1)
Coupling size :-					Manufacturer / Type	: - / -
Coupling / Shaft guard :-					Material code (Man'f/API)	: - / -
Weights (Approx.)					Internal neck bushing	: -
Bareshaft pump (net) : 3,009.3 lb					Gland	
Baseplate (net) : 1,523.4 lb					Gland material	: Stainless
Driver (net) :-					Flush	: 1/2" NPT
Shipping gross weight/volume : 4,532.7 lb / REFER to BU					Vent	: 1/2" P.T.
Testing					Drain	: 3/4" NPT
Hydrostatic test :-					Auxiliary seal device	: REFER
Performance test :-					Piping	
NPSH test :-					Seal flush plan	: -
Paint and Package					Seal flush construction	: -
Pump paint :-					Seal flush material	: -
Base grout surface prep : Painted					Aux seal flush plan	: -
Shipment type : Export					Aux seal flush construction	: -
					Aux seal flush material	: -
Notes						
1) Shaft diameter						
-						
Min. con. flow based on water						
-						
-						
-						


Customer	: Oscar Molina		Capacity	: 1,250.0 USgpm
Item number	: 1		Head	: 3,000.00 ft
Service	: -		Density / Specific gravity	: - / 0.999
Flowserve reference	: 4997837062		Pump speed	: 3,540 rpm
Pump size & type / Stages	: 6WXB-12A / 5		Ns / Nss (per eye)	: 1,137 / 8,810 (US)
Based on curve no.	: 6WX-12A / 0			
Impeller diameter	: 12.32 in		Date	: August 22, 2024

CURVES ARE APPROXIMATE, PUMP IS GUARANTEED FOR ONE SET OF CONDITIONS; CAPACITY, HEAD, AND EFFICIENCY.

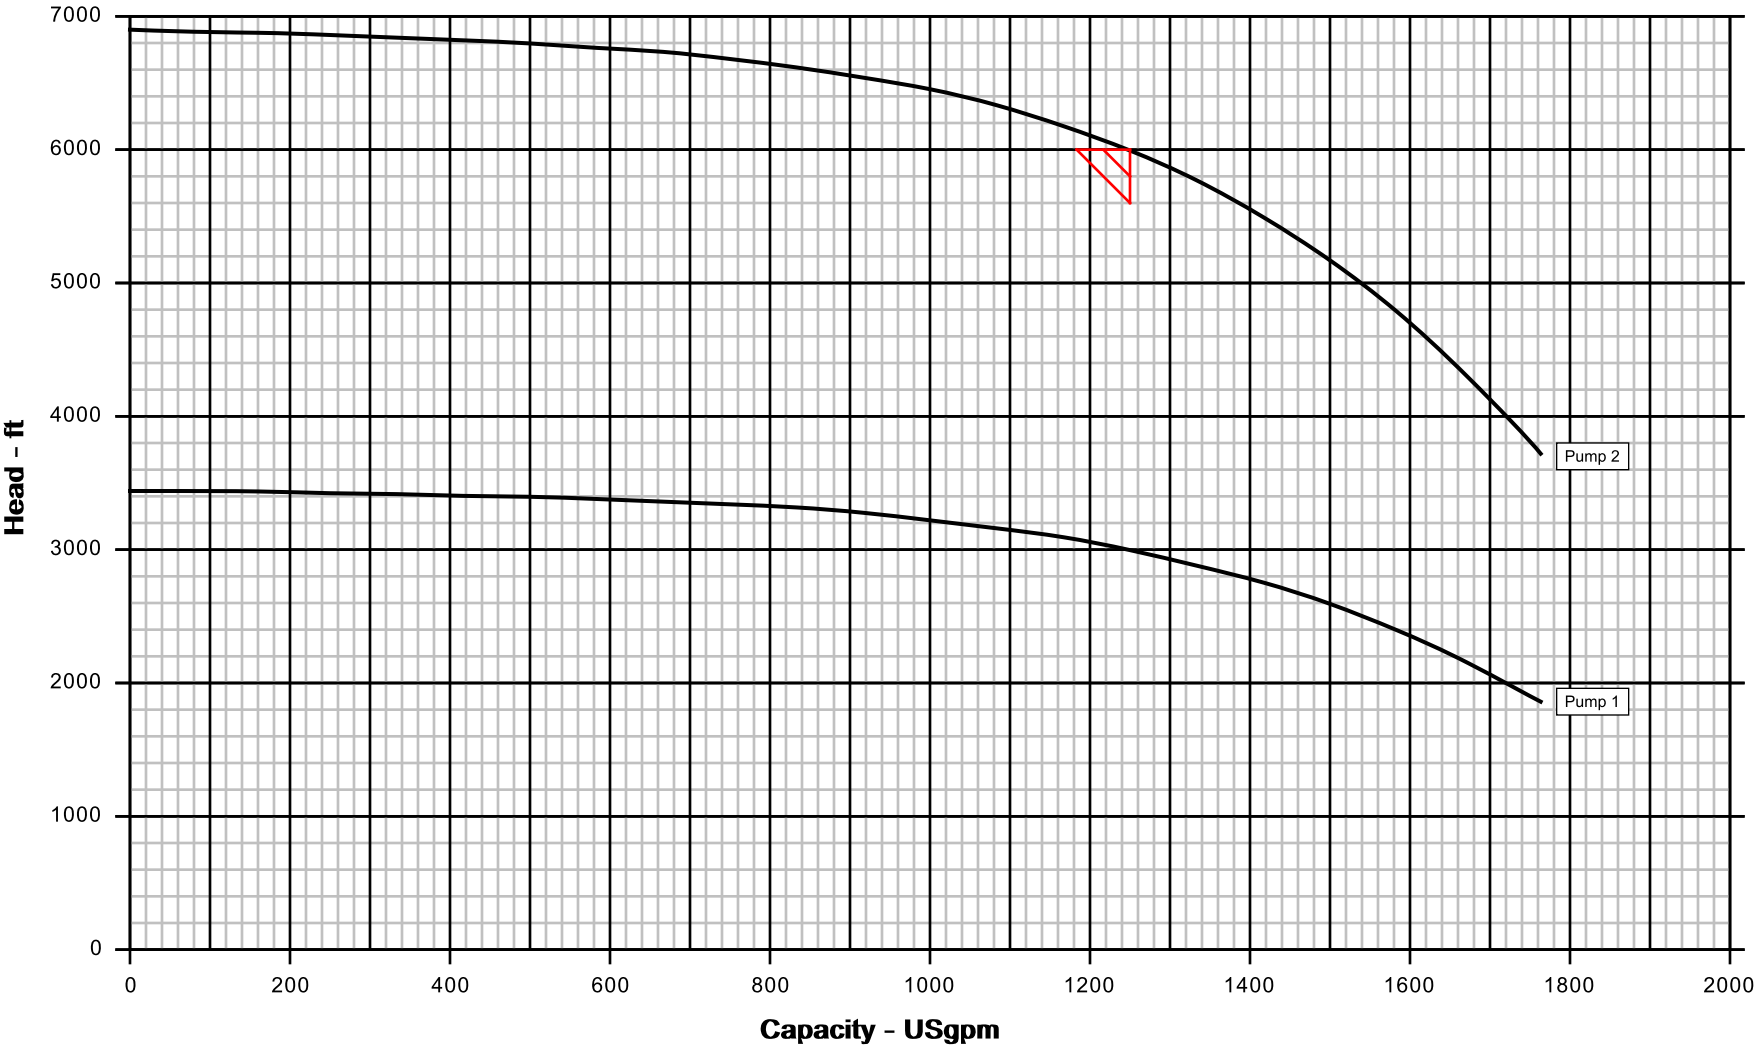


Customer	: Oscar Molina		Capacity	: 1,250.0 USgpm
Item number	: 1		Head	: 3,000.00 ft
Service	: -		Density / Specific gravity	: - / 0.999
Flowserve reference	: 4997837062		Pump speed	: 3,540 rpm
Pump size & type / Stages	: 6WXB-12A / 5		Ns / Nss (per eye)	: 1,137 / 8,810 (US)
Based on curve no.	: 6WX-12A / 0			
Impeller diameter	: 12.32 in		Date	: August 22, 2024

CURVES ARE APPROXIMATE, PUMP IS GUARANTEED FOR ONE SET OF CONDITIONS; CAPACITY, HEAD, AND EFFICIENCY.

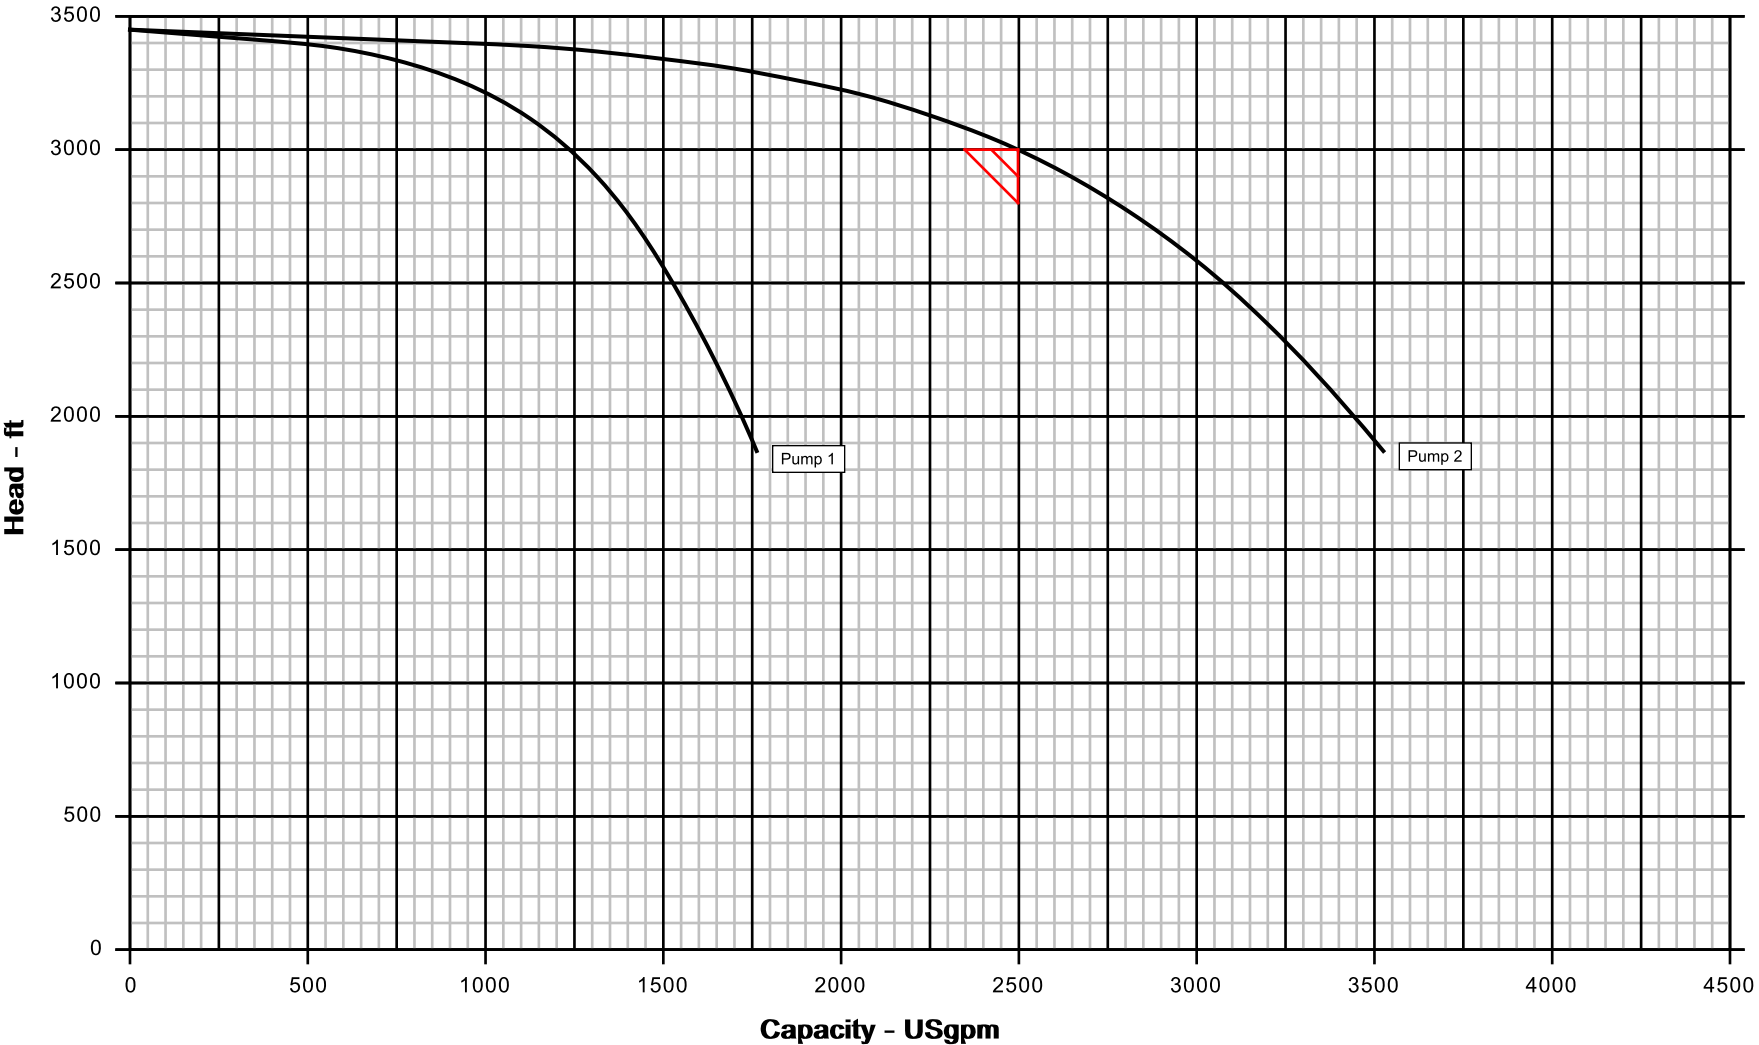

Customer	: Oscar Molina		Capacity	: 1,250.0 USgpm
Item number	: 1		Head	: 3,000.00 ft
Service	: -		Density / Specific gravity	: - / 0.999
Flowserve reference	: 4997837062		Pump speed	: 3,540 rpm
Pump size & type / Stages	: 6WXB-12A / 5		Ns / Nss (per eye)	: 1,137 / 8,810 (US)
Based on curve no.	: 6WX-12A / 0			
Impeller diameter	: 12.32 in		Date	: August 22, 2024

CURVES ARE APPROXIMATE, PUMP IS GUARANTEED FOR ONE SET OF CONDITIONS: CAPACITY, HEAD, AND EFFICIENCY.

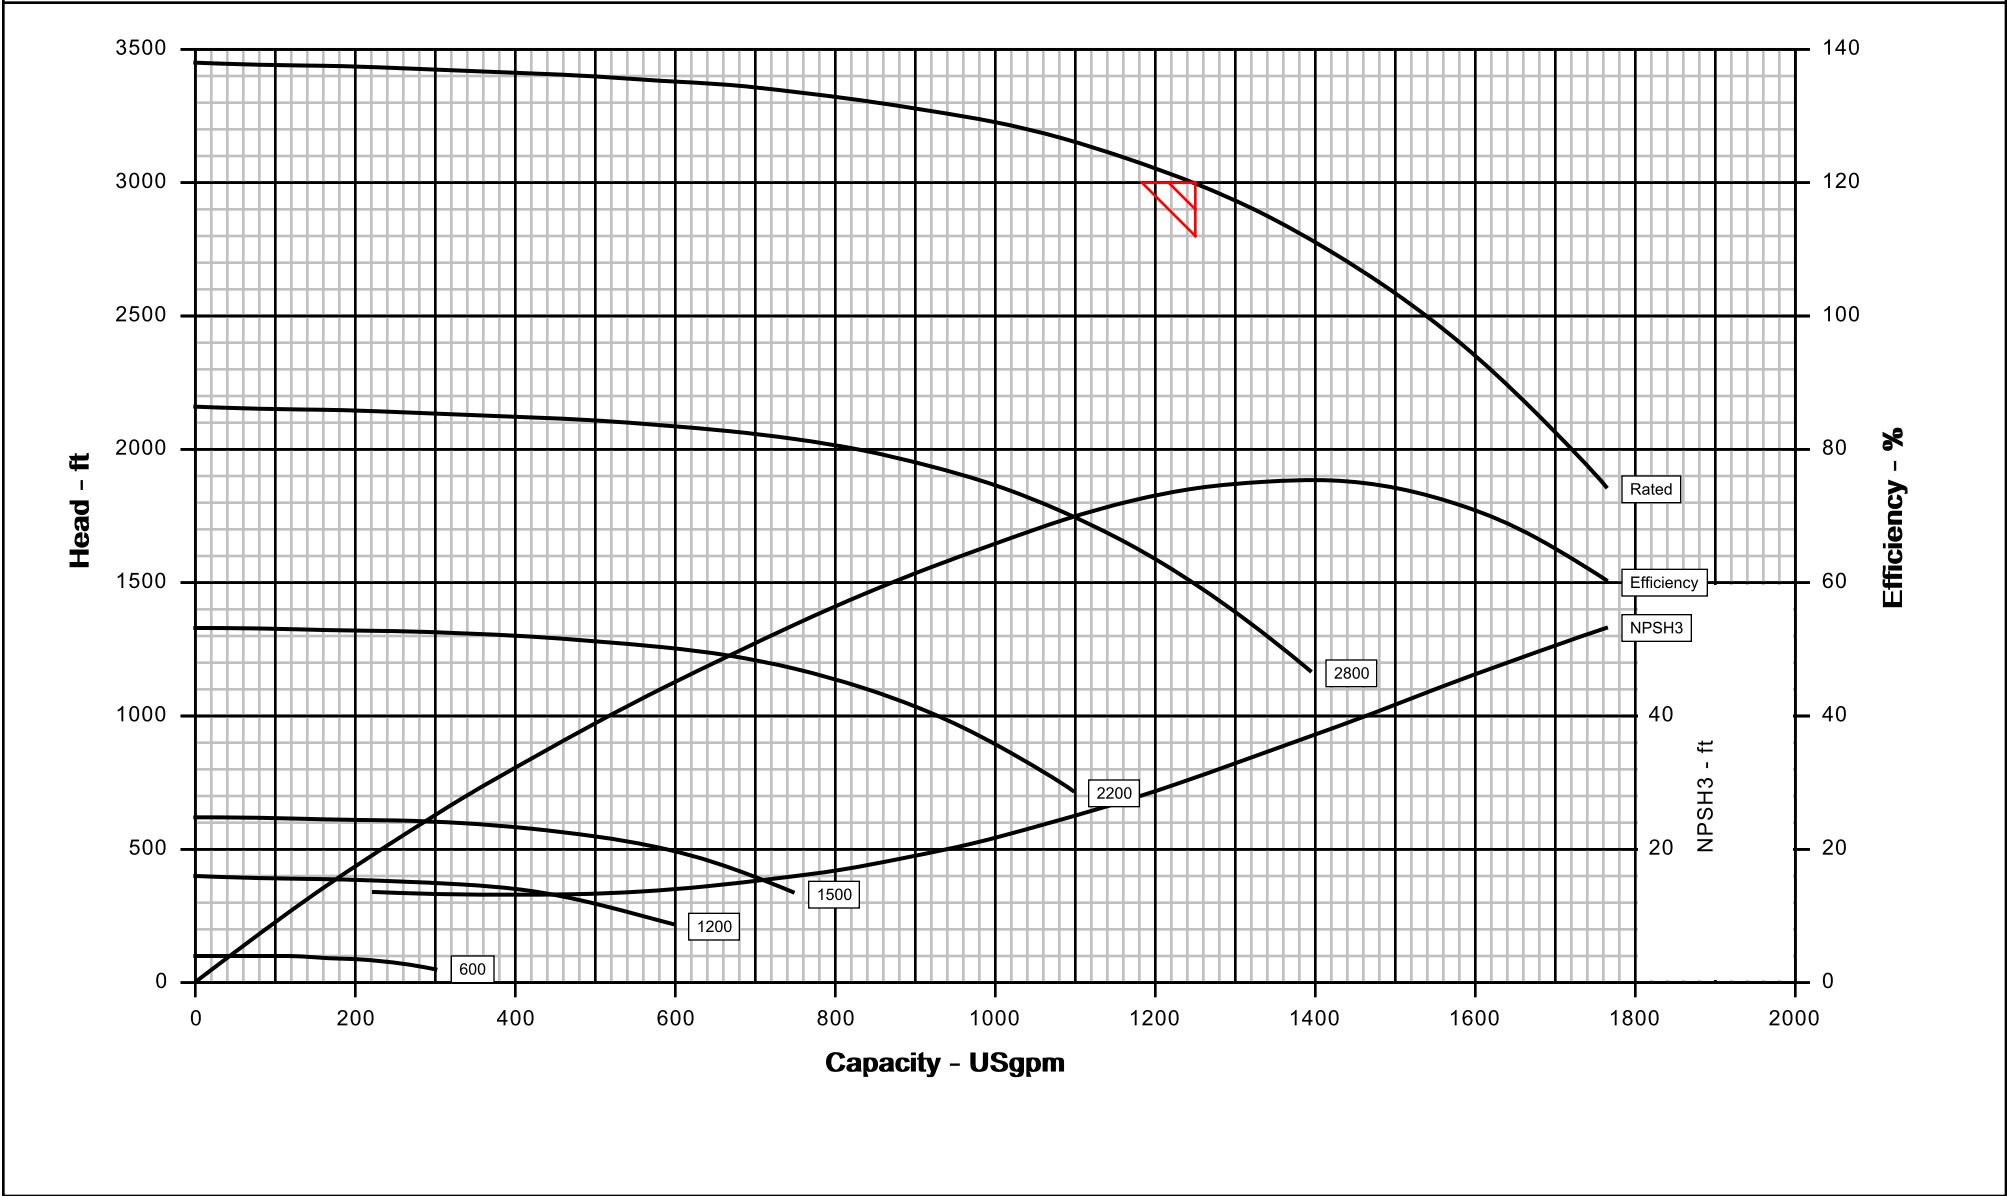

Customer	: Oscar Molina		Capacity	: 1,250.0 USgpm
Item number	: 1		Head	: 3,000.00 ft
Service	: -		Density / Specific gravity	: - / 0.999
Flowserve reference	: 4997837062		Pump speed	: 3,540 rpm
Pump size & type / Stages	: 6WXB-12A / 5		Ns / Nss (per eye)	: 1,137 / 8,810 (US)
Based on curve no.	: 6WX-12A / 0		Pump WR ² at 3,540 rpm	: -
Impeller diameter	: 12.32 in		Date	: August 22, 2024

CURVES ARE APPROXIMATE, PUMP IS GUARANTEED FOR ONE SET OF CONDITIONS; CAPACITY, HEAD, AND EFFICIENCY.

