
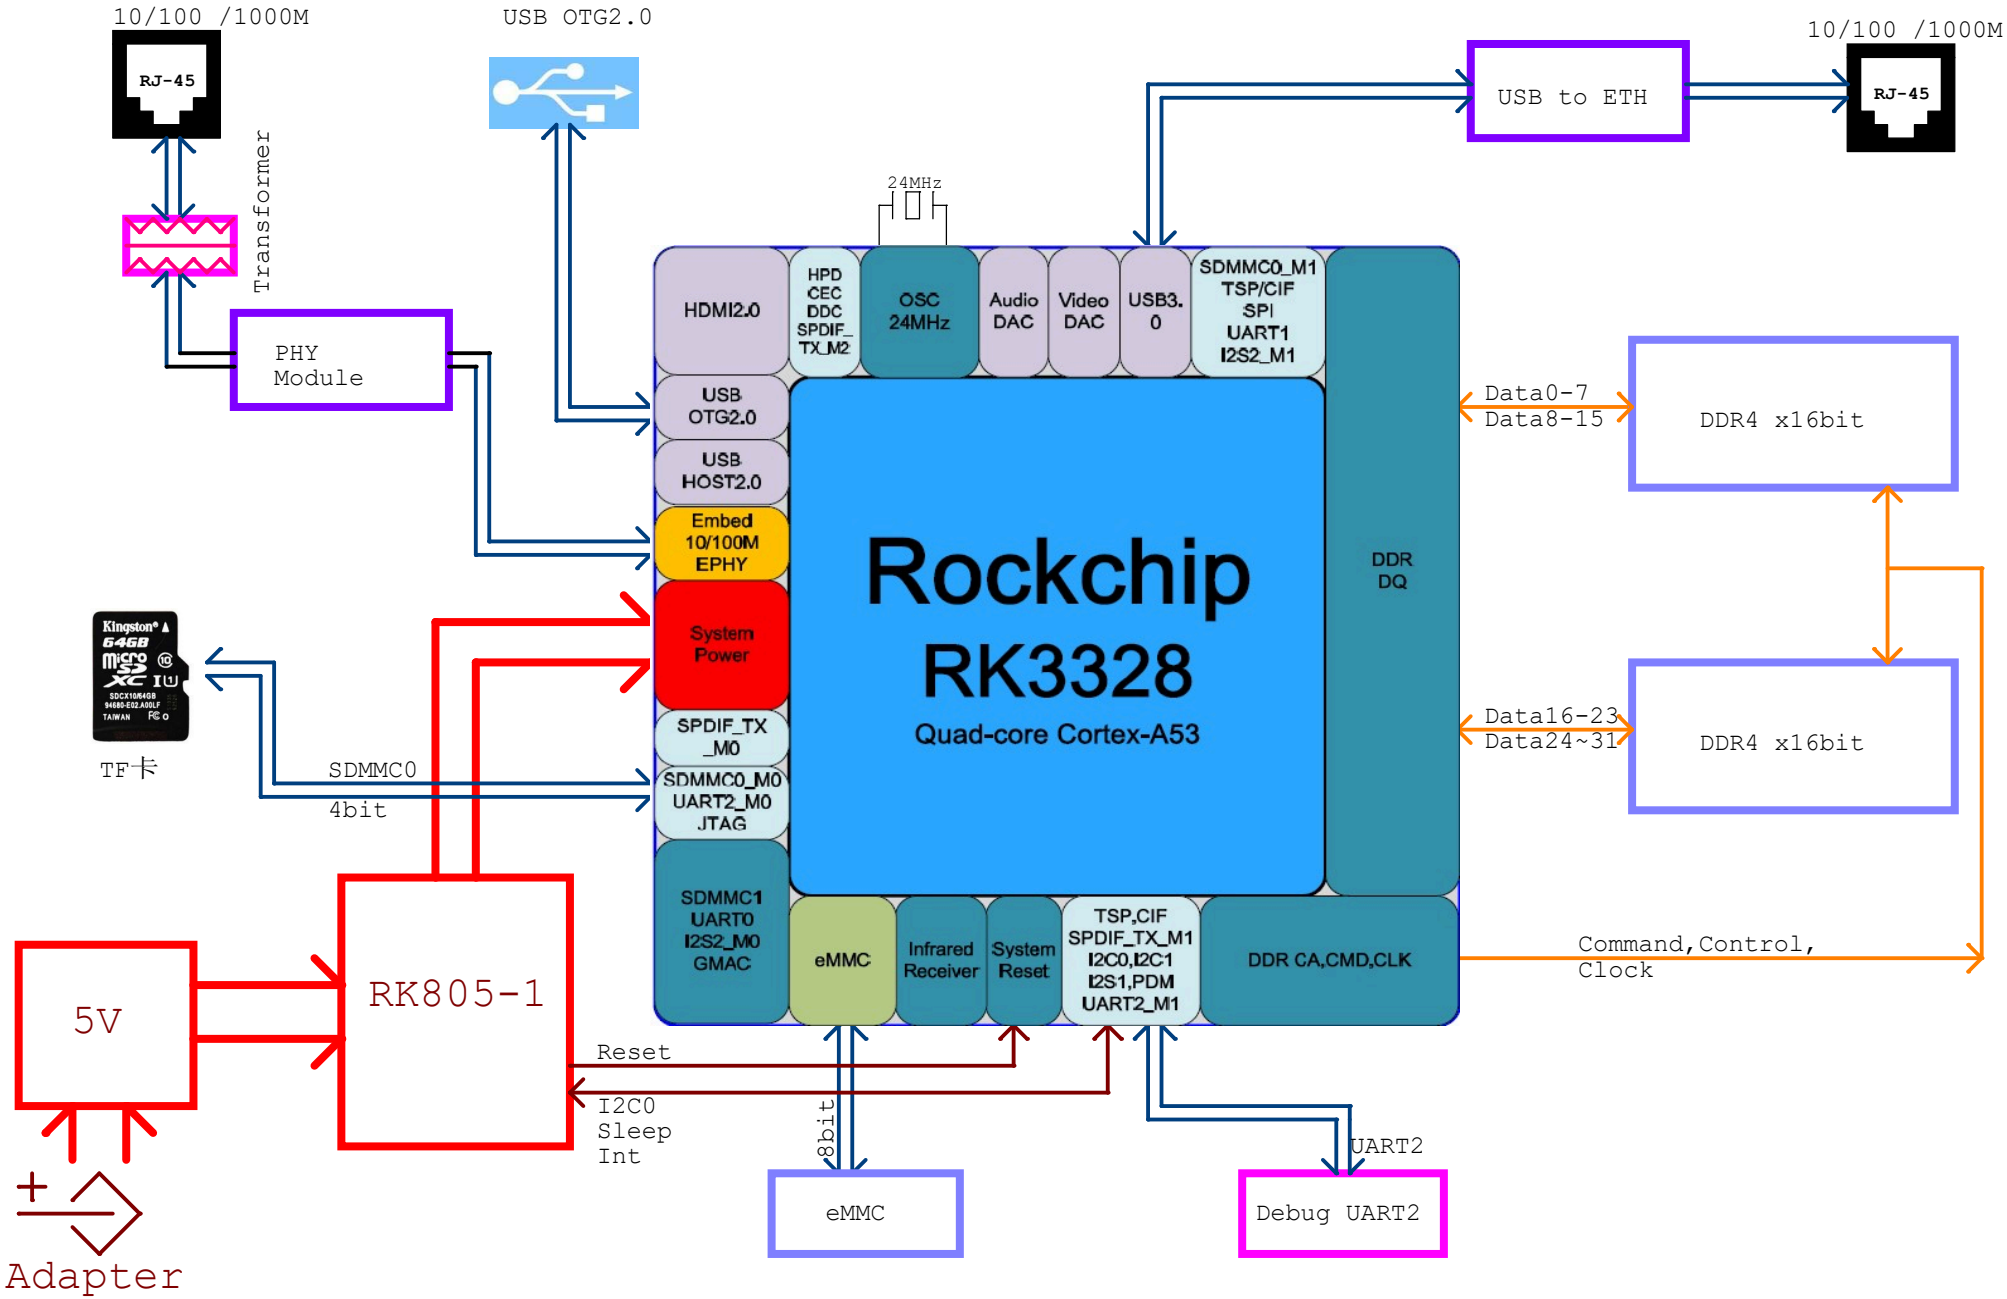


FRIENDLY ELEC Power & Source of Big Ideas
https://www.friendlyarm.com/
https://wiki.friendlyarm.com/

NanoPi R2C	Rev 2107
Size A3	Page Name 01.Block Diagram
Date: Wednesday, August 04, 2021	Sheet: 1 / 12

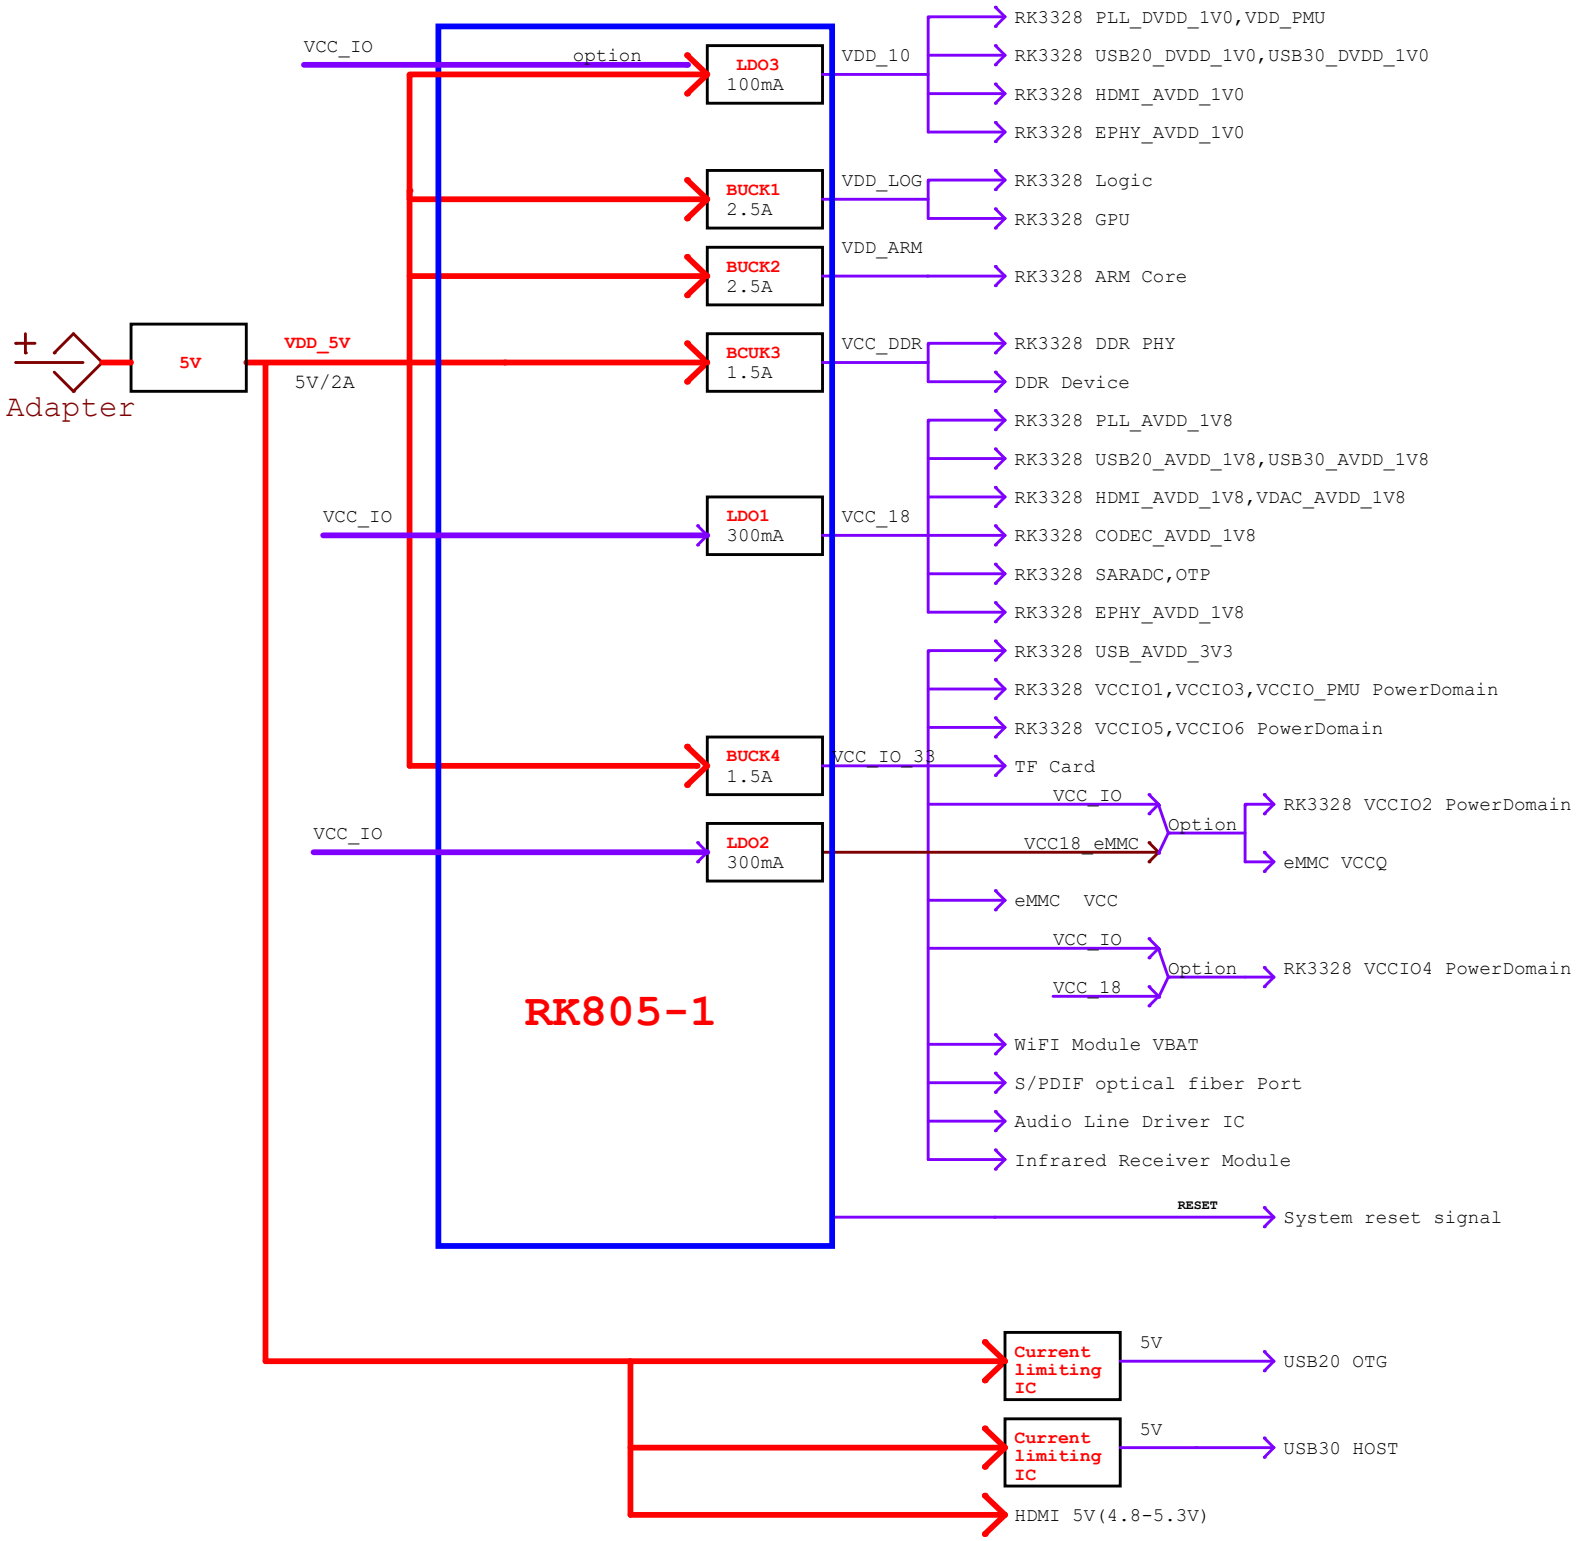


Power Timing

TYPE	VOLT	STEP	PowerName
BUCK1	1.1V		VDD_LOG
BUCK2	1.1V		VDD_ARM
BUCK3	FB=0.8V		VCC_DDR
BUCK4	3.3V		VCC_IO
LDO1	1.8V		VCC_18
LDO2	1.8V		VCC18_eMMC
LDO3	1.0V		VDD_10

IO电源域电压	IO电压＝3.3V	IO电压＝1.8V
VCCIO_PMU	3.3V	不支持
VCCIO1	3.3V	不支持
VCCIO2		1.8V（默认） eMMC
VCCIO3	3.3V（默认）	
VCCIO4	3.3V（默认） WIFI:RTL8723BS	
VCCIO5	3.3V（默认）	
VCCIO6	3.3V（默认）	

FRIENDLY ELEC Power & Source of Big Ideas
https://www.friendlyarm.com/
https://wiki.friendlyarm.com/

NanoPi R2C		Rev 2107
Size A2	Page Name 02.Power tree-RK805-1	
Date: Wednesday, August 04, 2021		Sheet: 2 / 12

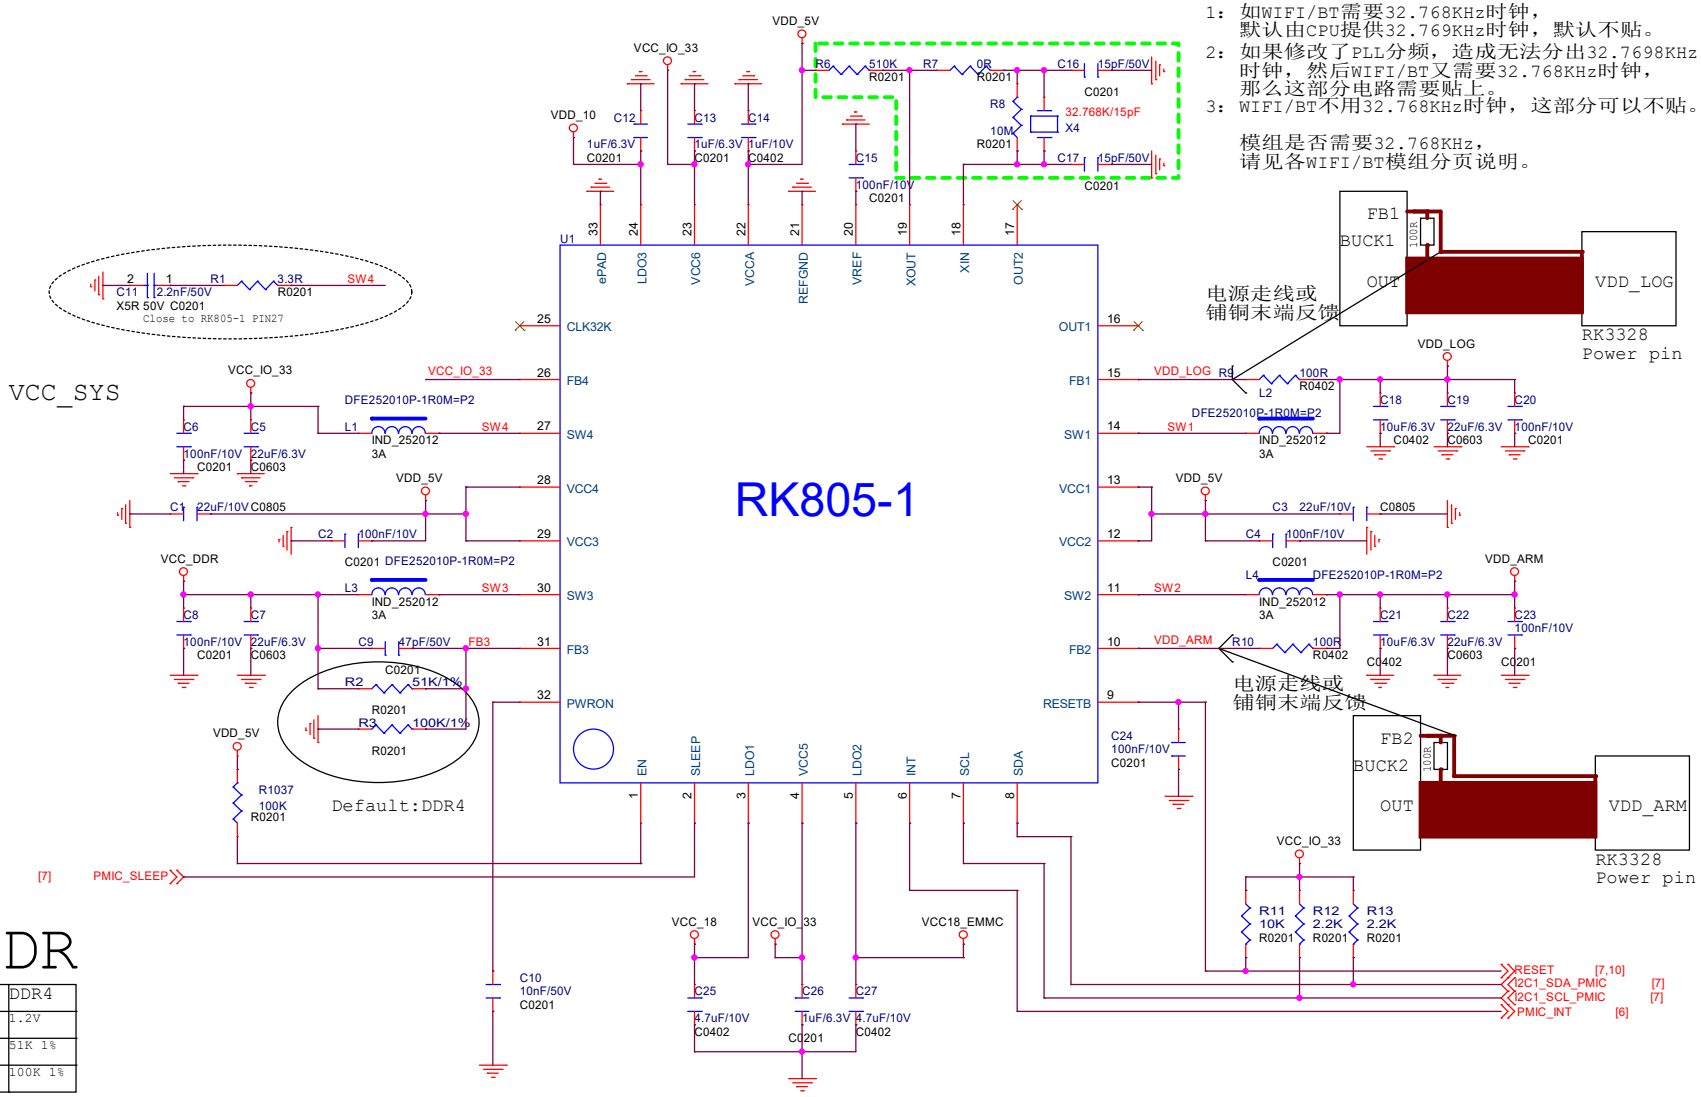

1：如WIFI/BT需要32.768KHz时钟，
默认由CPU提供32.769KHz时钟，默认不贴。
2：如果修改了PLL分频，造成无法分出32.7698KHz
时钟，然后WIFI/BT又需要32.768KHz时钟，
那么这部分电路需要贴上。
3：WIFI/BT不用32.768KHz时钟，这部分可以不贴。


模组是否需要32.768KHz，
请见各WIFI/BT模组分页说明。

VCC_DDR


	DDR3	DDR3L	DDR4
VCC_DDR	1.527V	1.353V	1.2V
R725	100K 1%	47K 1%	51K 1%
R726	110K 1%	68K 1%	100K 1%


FRIENDLY ELEC Power & Source of Big Ideas
https://www.friendlyarm.com/
https://wiki.friendlyarm.com/

NanoPi R2C	Rev 2107
Size A3	Page Name 03.PMIC RK805-1
Date: Wednesday, August 04, 2021	Sheet: 3 / 12

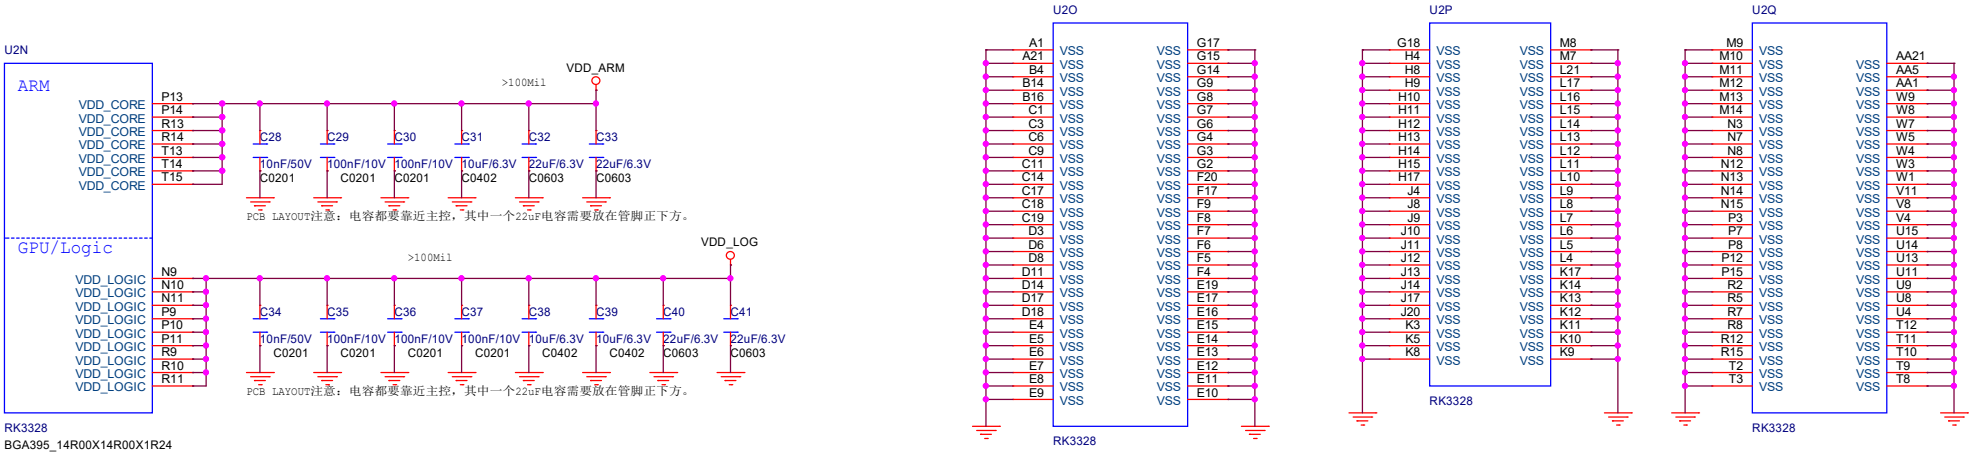


RK3328 OSC/PLL/OTP/SARADC

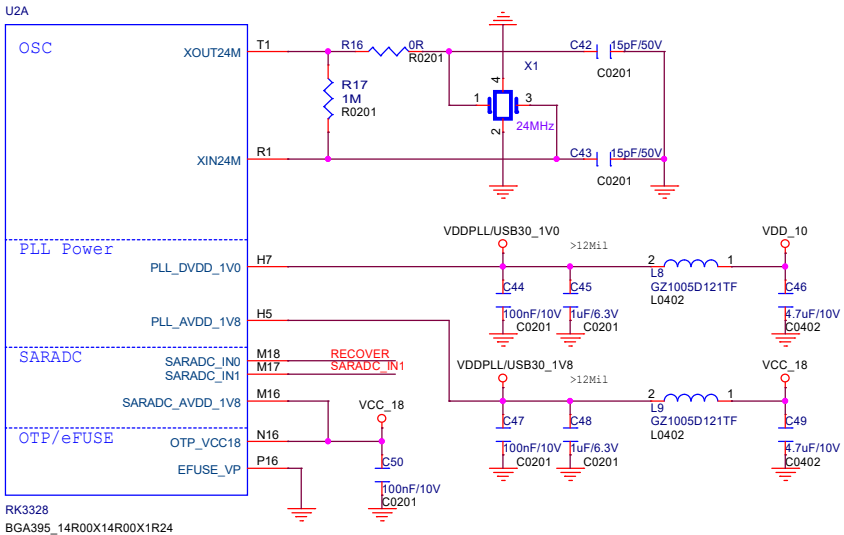

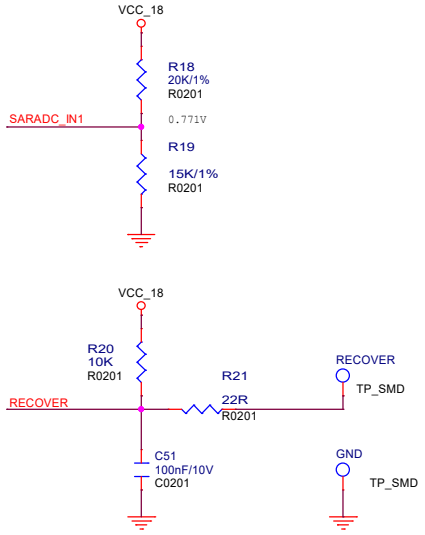


FRIENDLY ELEC Power & Source of Big Ideas
https://www.friendlyarm.com/
https://wiki.friendlyarm.com/


NanoPi R2C	Rev 2107
Size A3	Page Name 04.RK3328 Power
Date: Wednesday, August 04, 2021	Sheet: 4 / 12

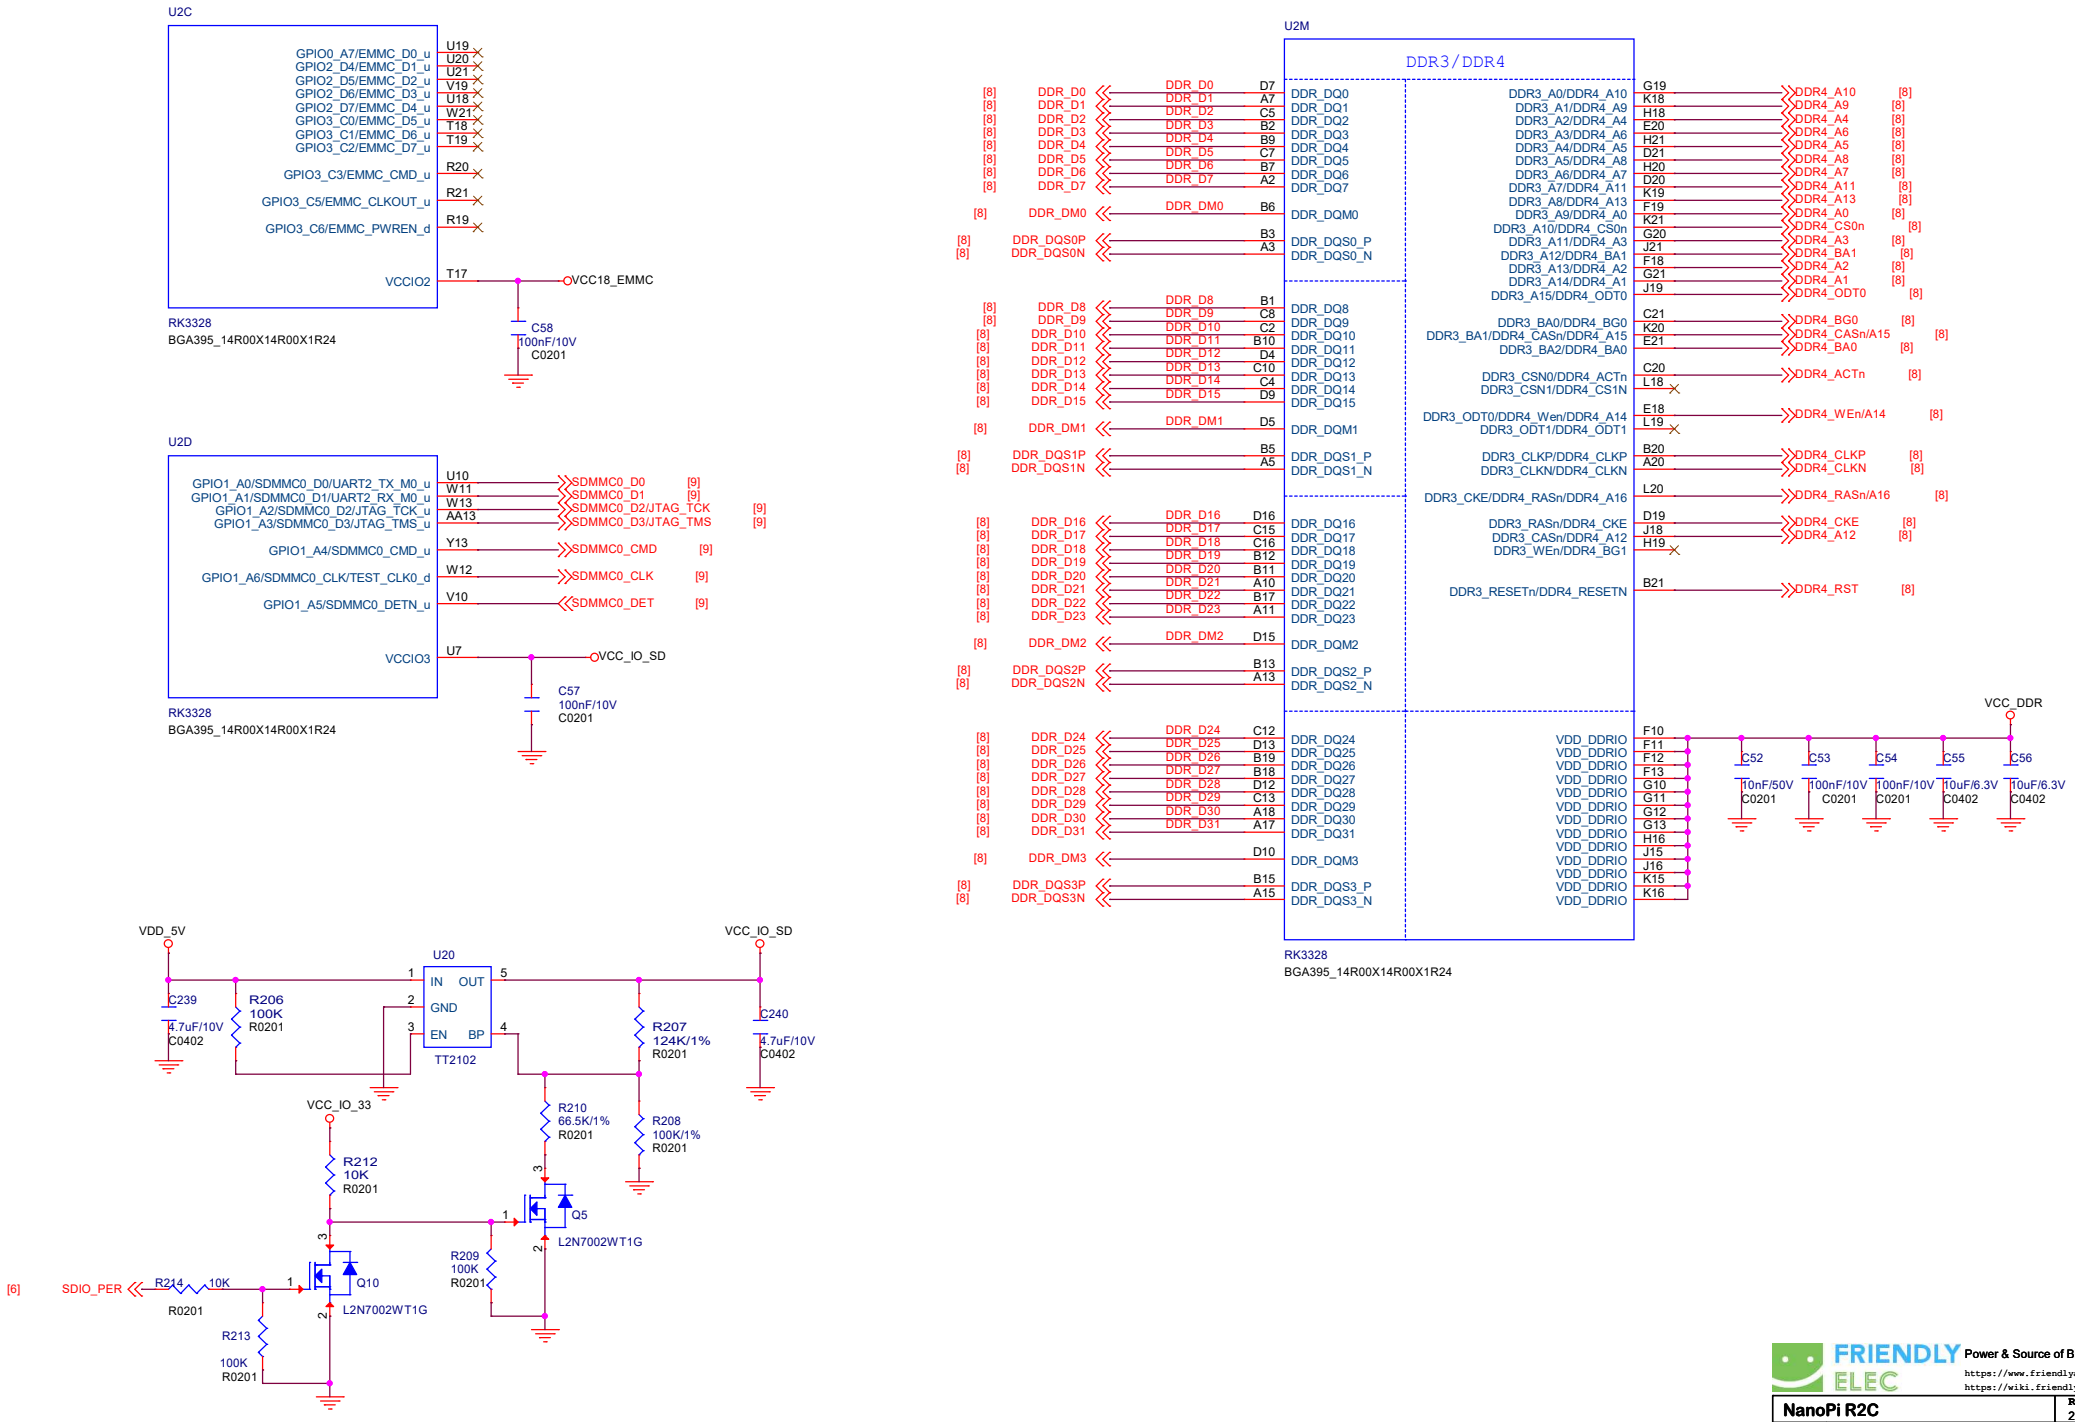


FRIENDLY ELEC Power & Source of Big Ideas
https://www.friendlyarm.com/
https://wiki.friendlyarm.com/


NanoPi R2C	Rev 2107
Size A3	Page Name 05.DDR/eMMC/TF Controler
Date: Wednesday, August 04, 2021	Sheet: 5 / 12

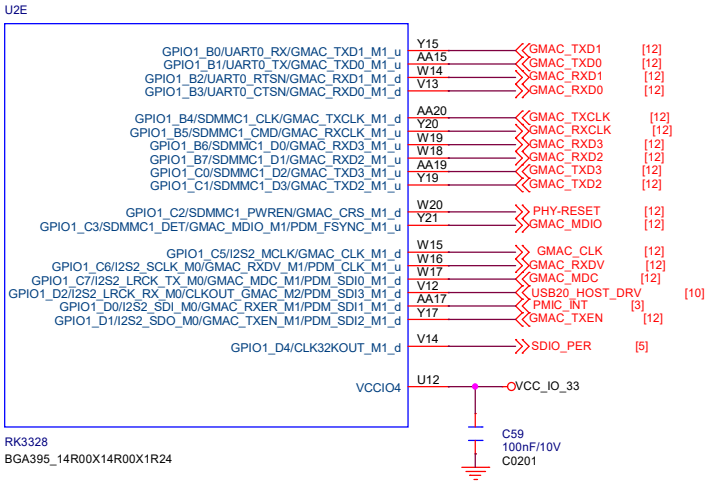


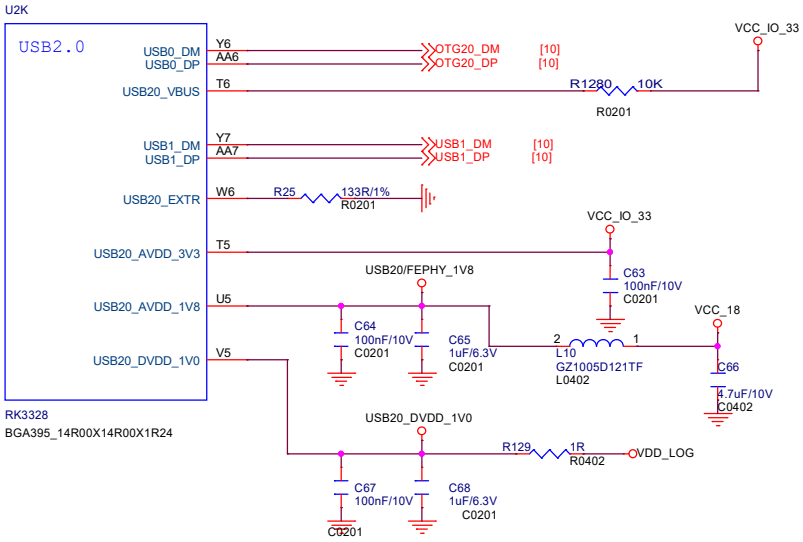

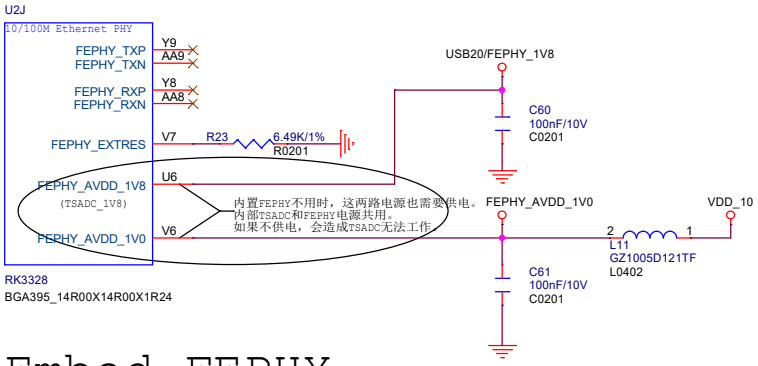


Embed FEPHY

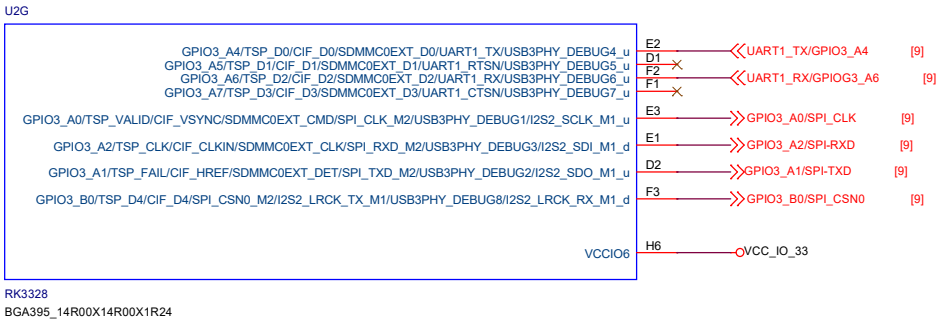

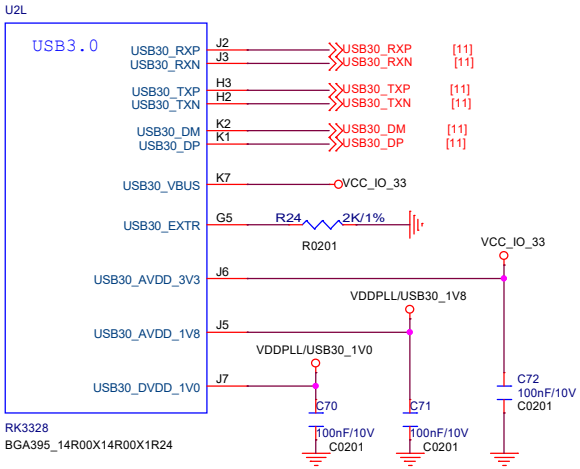


FRIENDLY ELEC Power & Source of Big Ideas
https://www.friendlyarm.com/
https://wiki.friendlyarm.com/


NanoPi R2C	Rev 2107
Size A3	Page Name 06.MAC/WiFi/USB Controler
Date: Wednesday, August 04, 2021	Sheet: 6 / 12

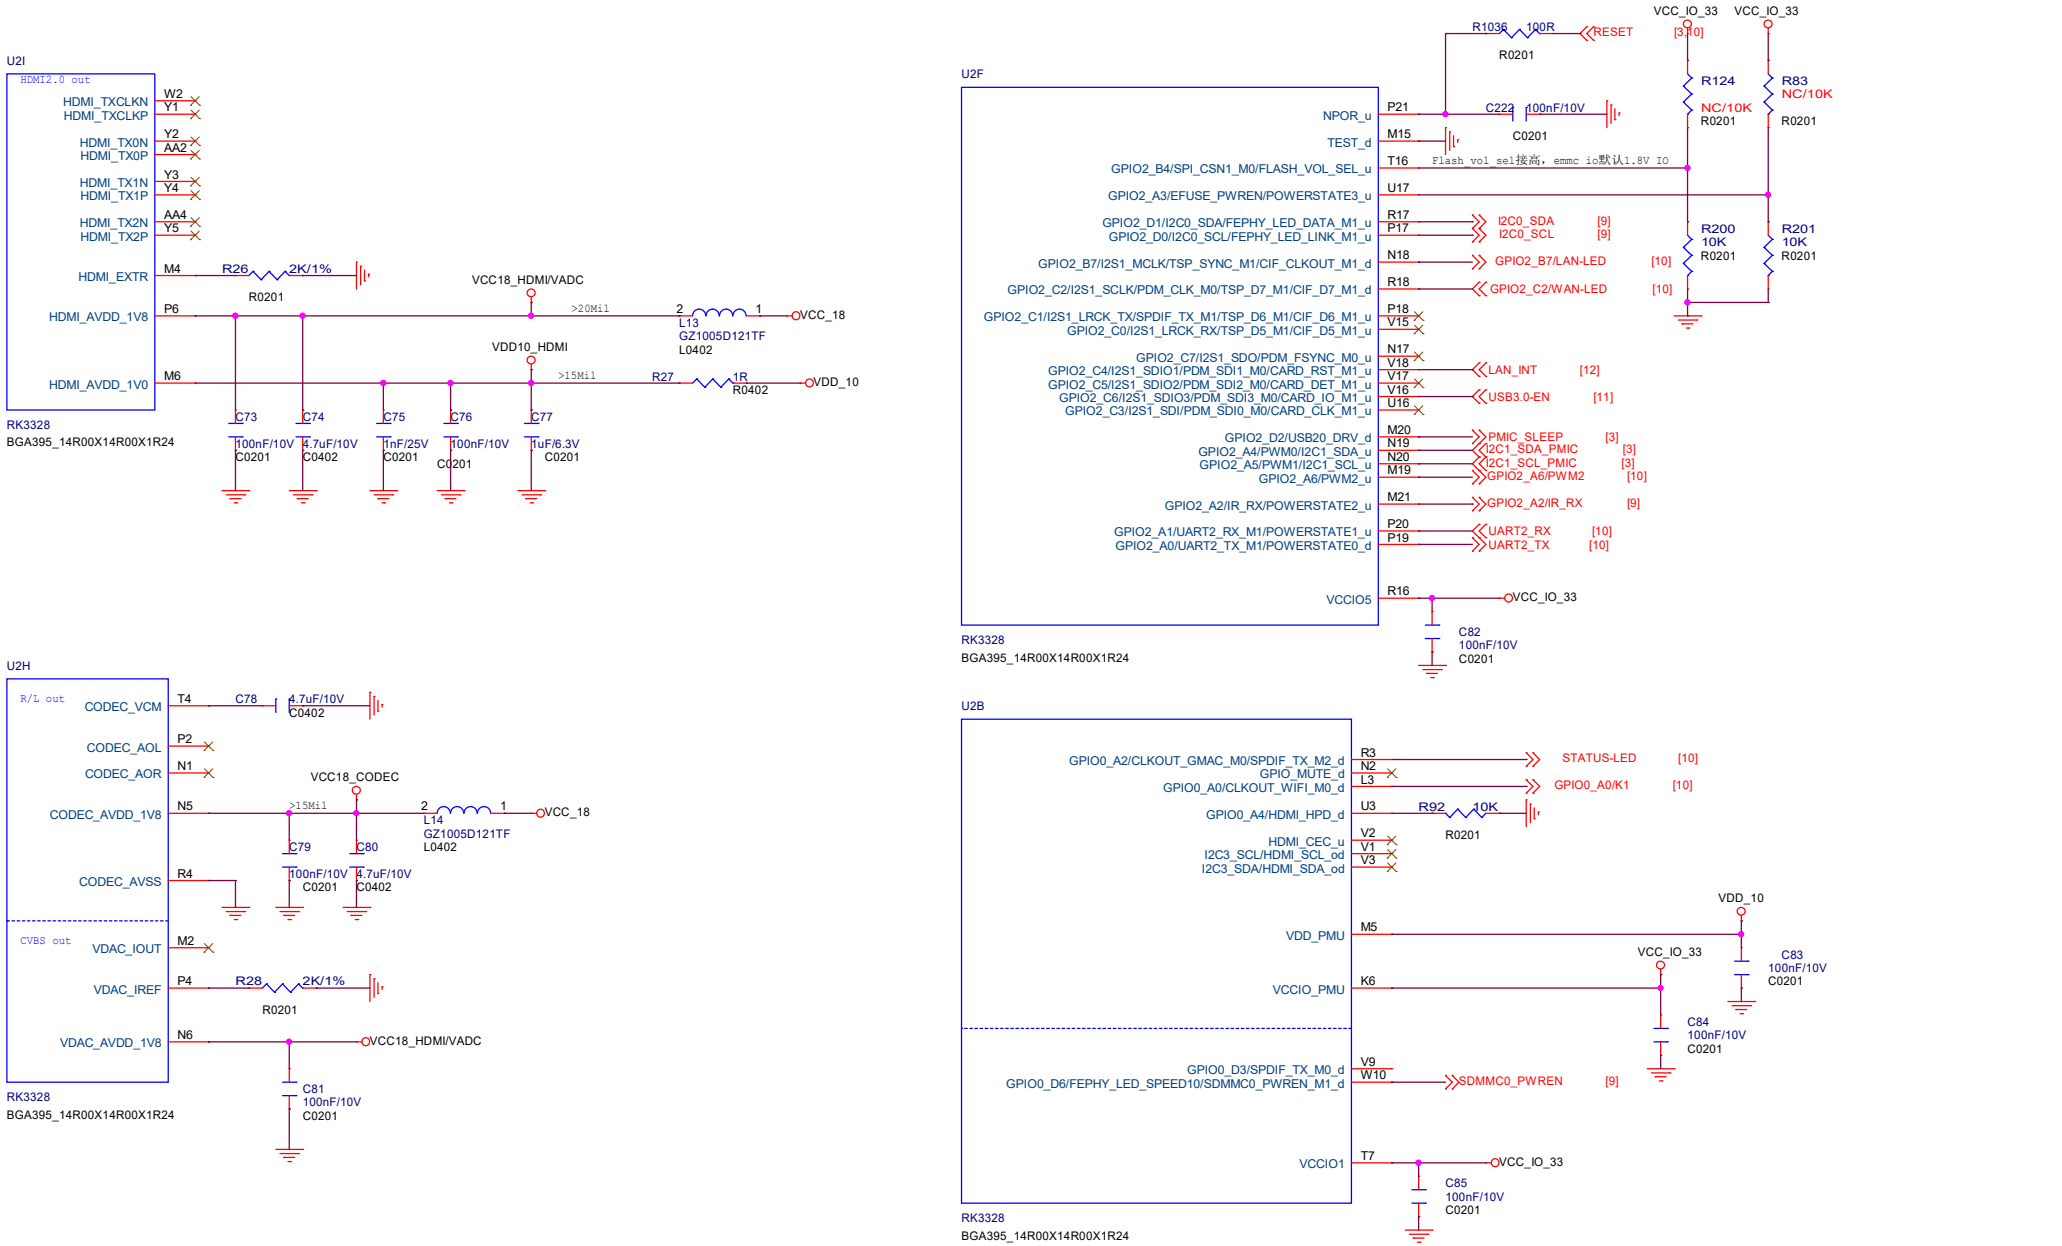



FRIENDLY ELEC Power & Source of Big Ideas
https://www.friendlyarm.com/
https://wiki.friendlyarm.com/


NanoPi R2C	Rev 2107
Size A3	Page Name 07.HDMI/AV/GPIO Controler
Date: Wednesday, August 04, 2021	Sheet: 7 / 12

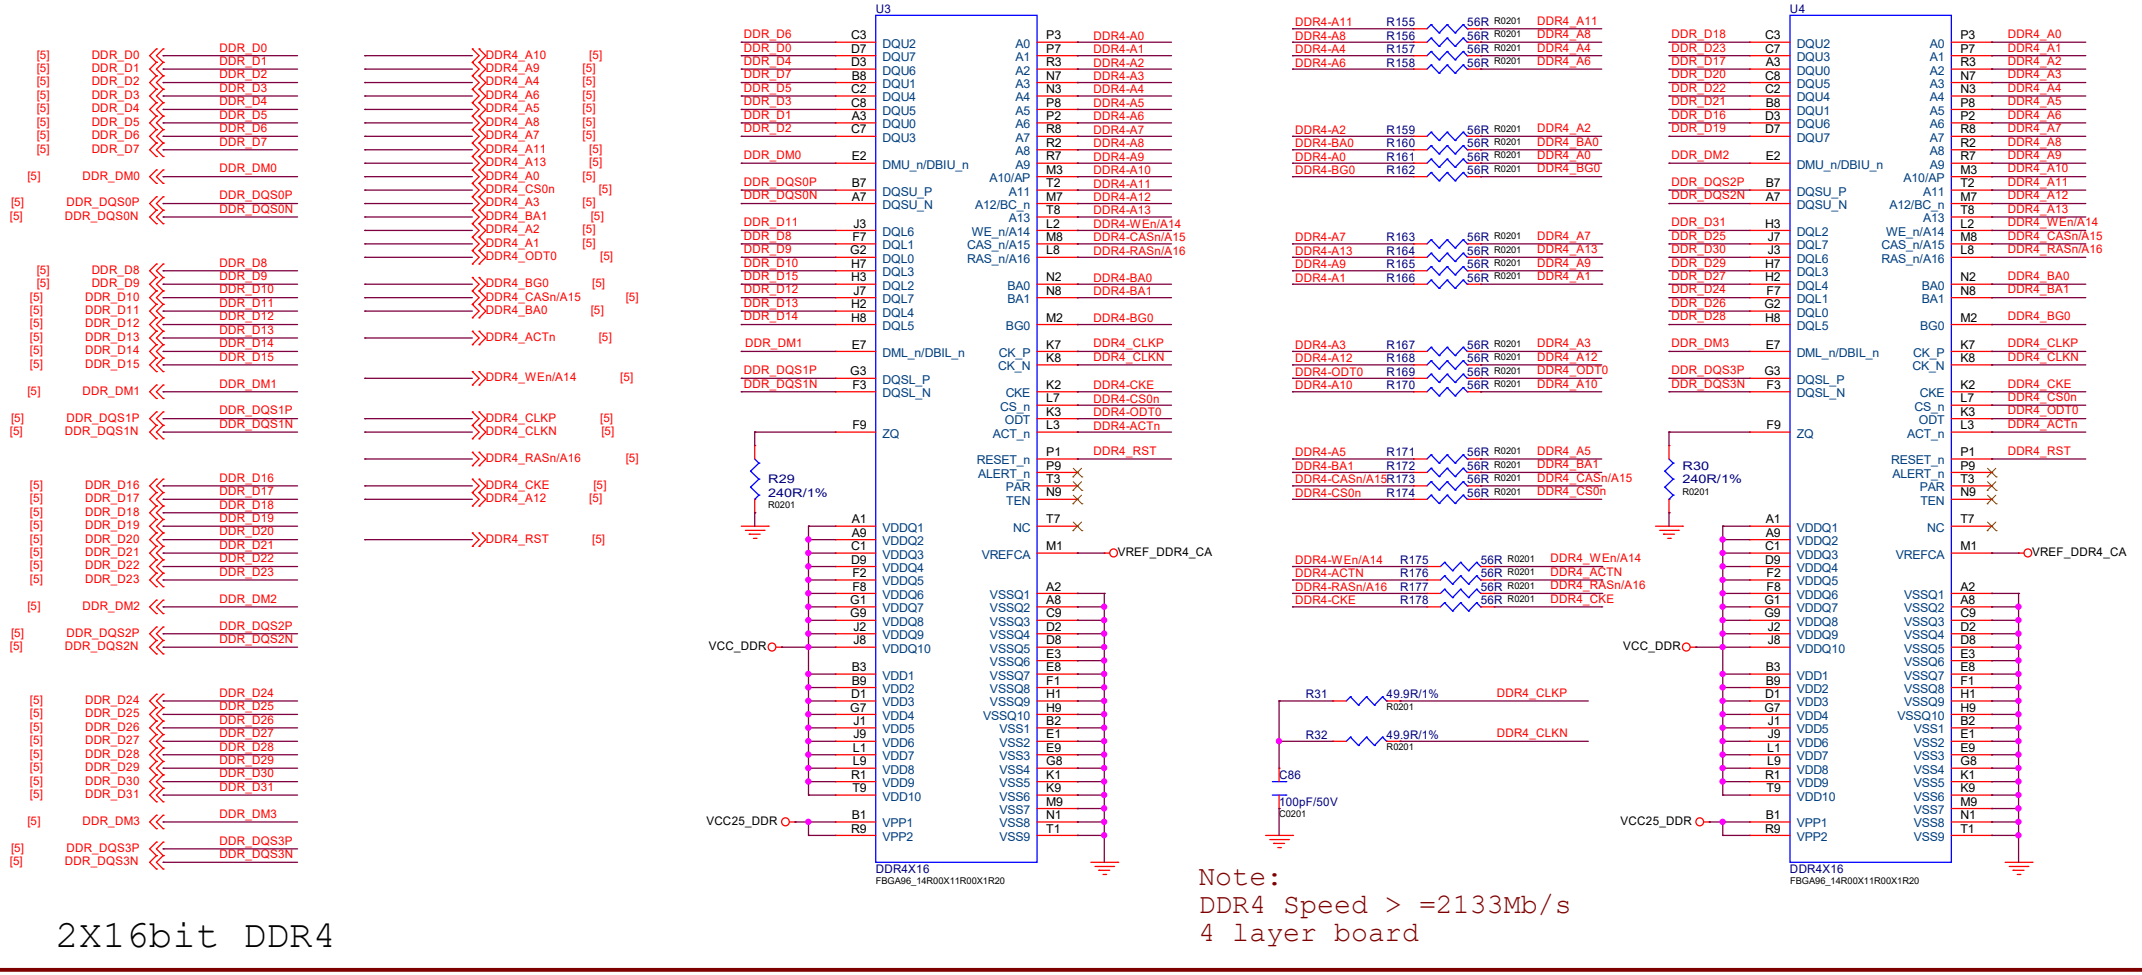

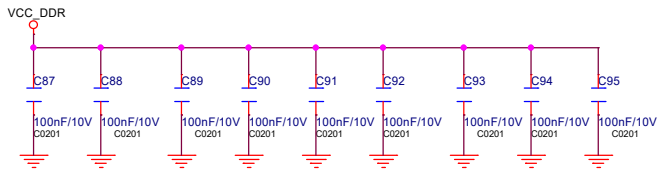

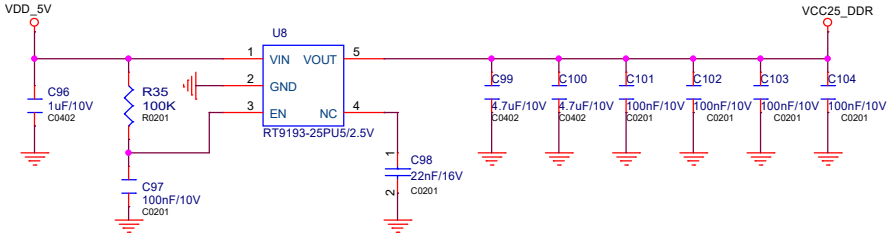




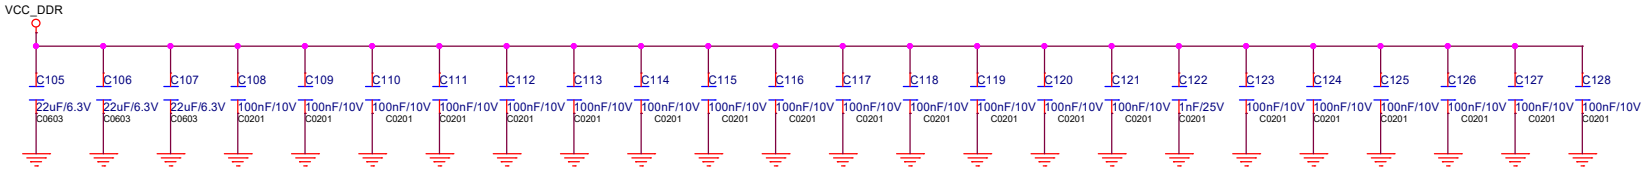



FRIENDLY ELEC Power & Source of Big Ideas
https://www.friendlyarm.com/
https://wiki.friendlyarm.com/

NanoPi R2C	Rev 2107
Size A3	Page Name 08.RAM DDR4 4x16bit
Date: Wednesday, August 04, 2021	Sheet: 8 / 12

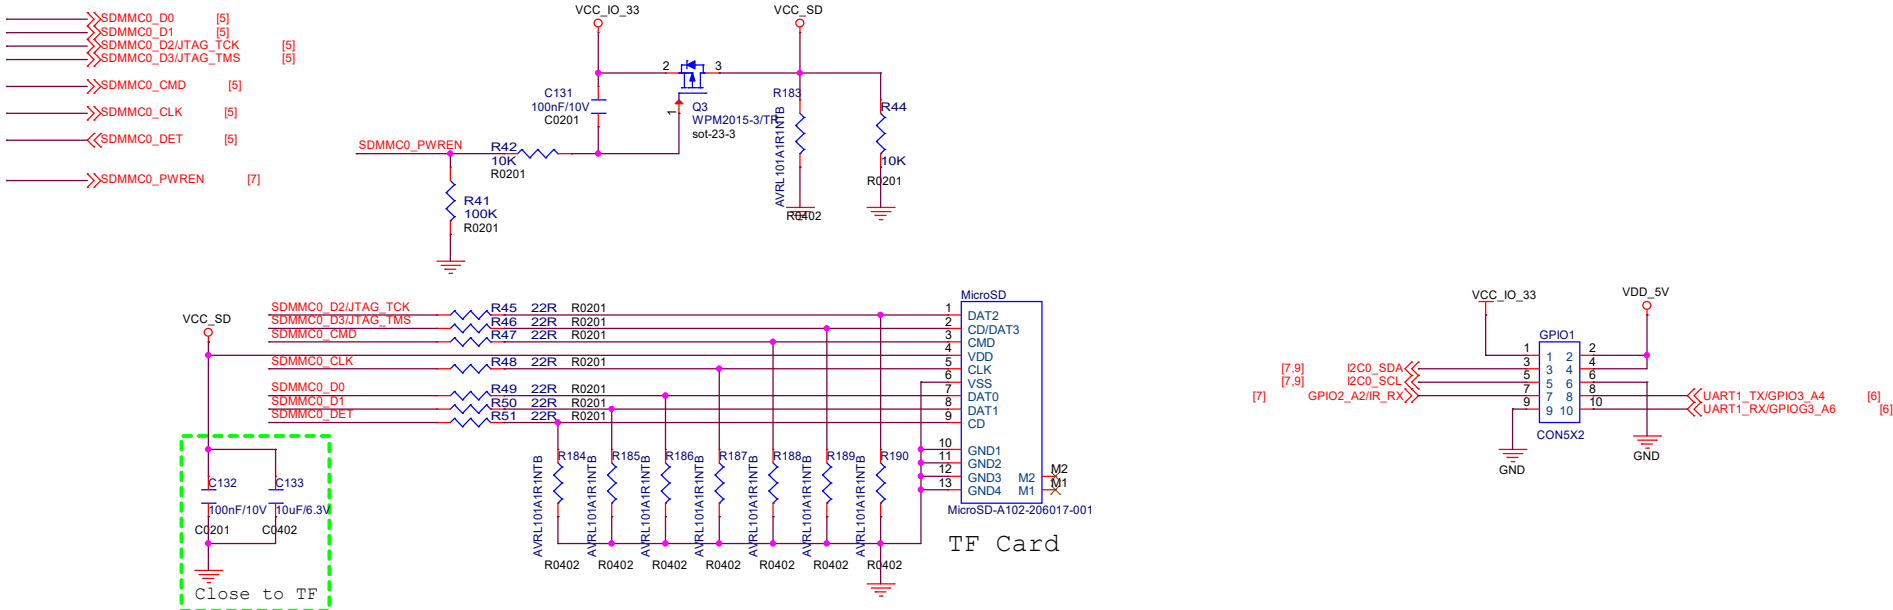

EEPROM with MAC Address

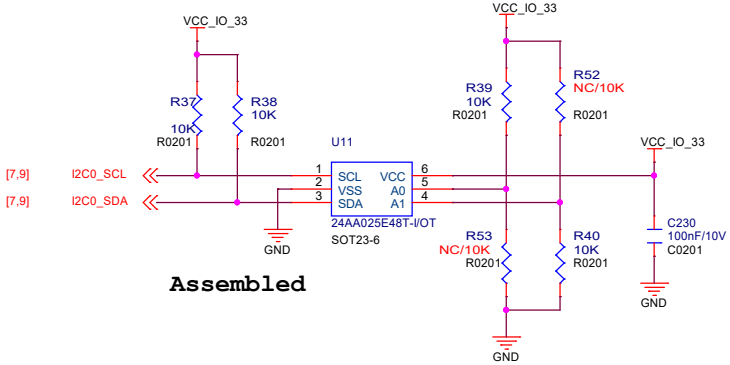


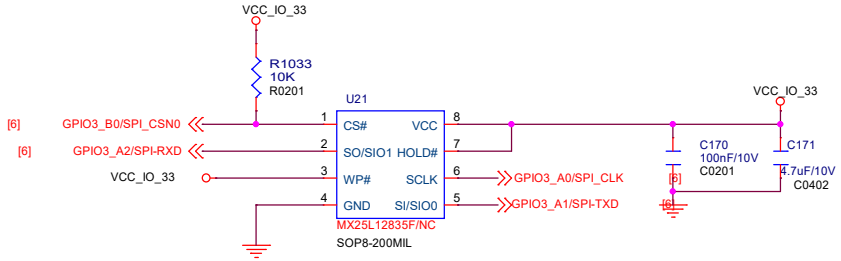


FRIENDLY ELEC Power & Source of Big Ideas
https://www.friendlyarm.com/
https://wiki.friendlyarm.com/


NanoPi R2C	Rev 2107
Size A3	Page Name 09.TF/SD Card/EEPROM/SPI Flash
Date: Wednesday, August 04, 2021	Sheet: 9 / 12

MicroUSB:PWR and Slave

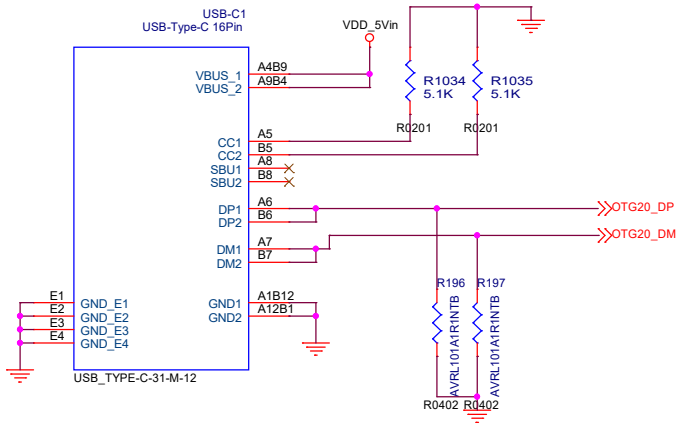

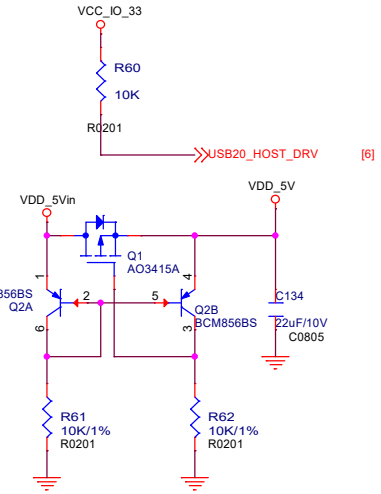

USB Host

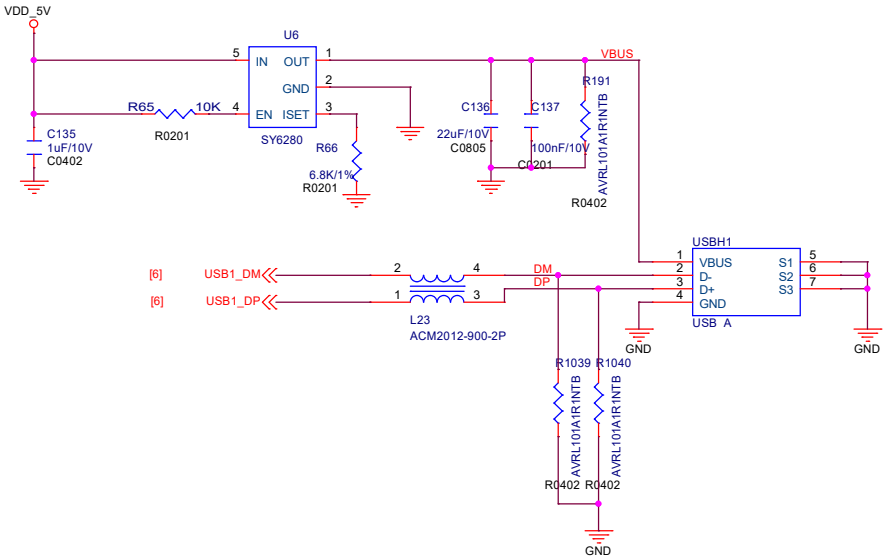

VDD_5Vin

D1
AZ5825-01F
ESD0402

不得删除！
不得随意更换型号！


IF TVS UNMOUNTED, ESD OR SURGE SHOULD BE DAMAGE THE PMIC!!!

如果采用5v适配器，那这个器件必须贴。型号建议不更换，要更换需相同的规格。


Operating Supply Vltage : 5.5V(5.25-6V)
PeakPulse Current: >10A (tp=8/20uS)
Surge Clamping Voltage: <6.5V

DO NOT DELETE IT!


LEDs

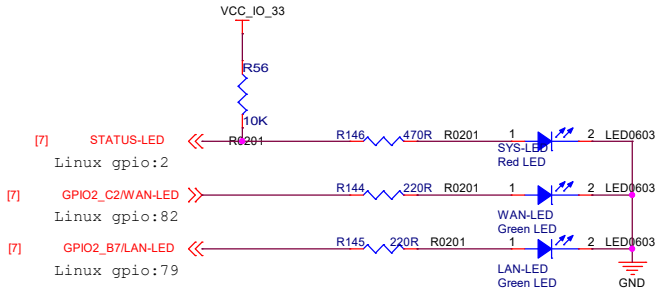


FAN

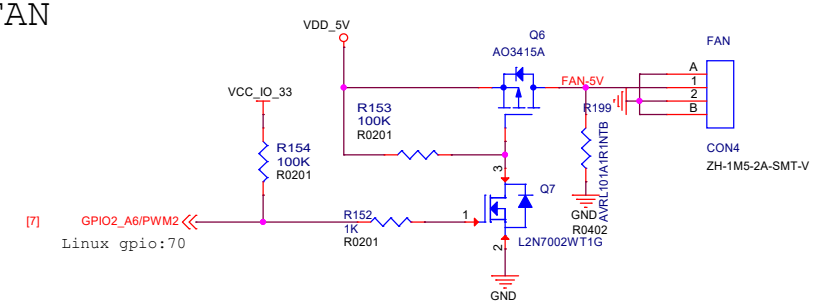

Debug UART2

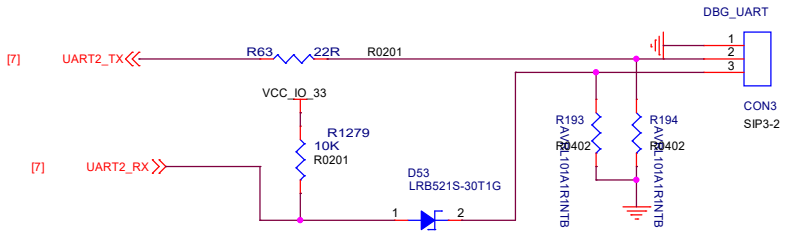


KEY

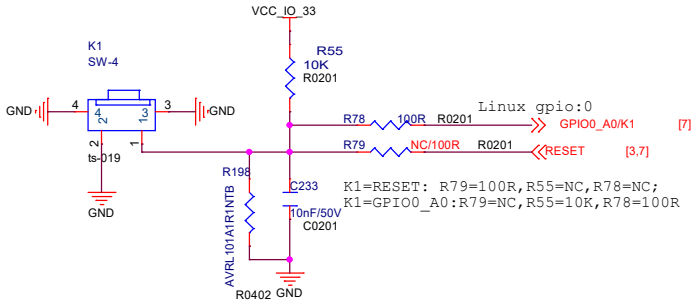

FRIENDLY ELEC Power & Source of Big Ideas
https://www.friendlyarm.com/
https://wiki.friendlyarm.com/

NanoPi R2C		Rev 2107
Size A3	Page Name 10.USB Port/LED/Debug/FAN/KEY	
Date: Wednesday, August 04, 2021	Sheet: 10/ 12	

USB3 GbE

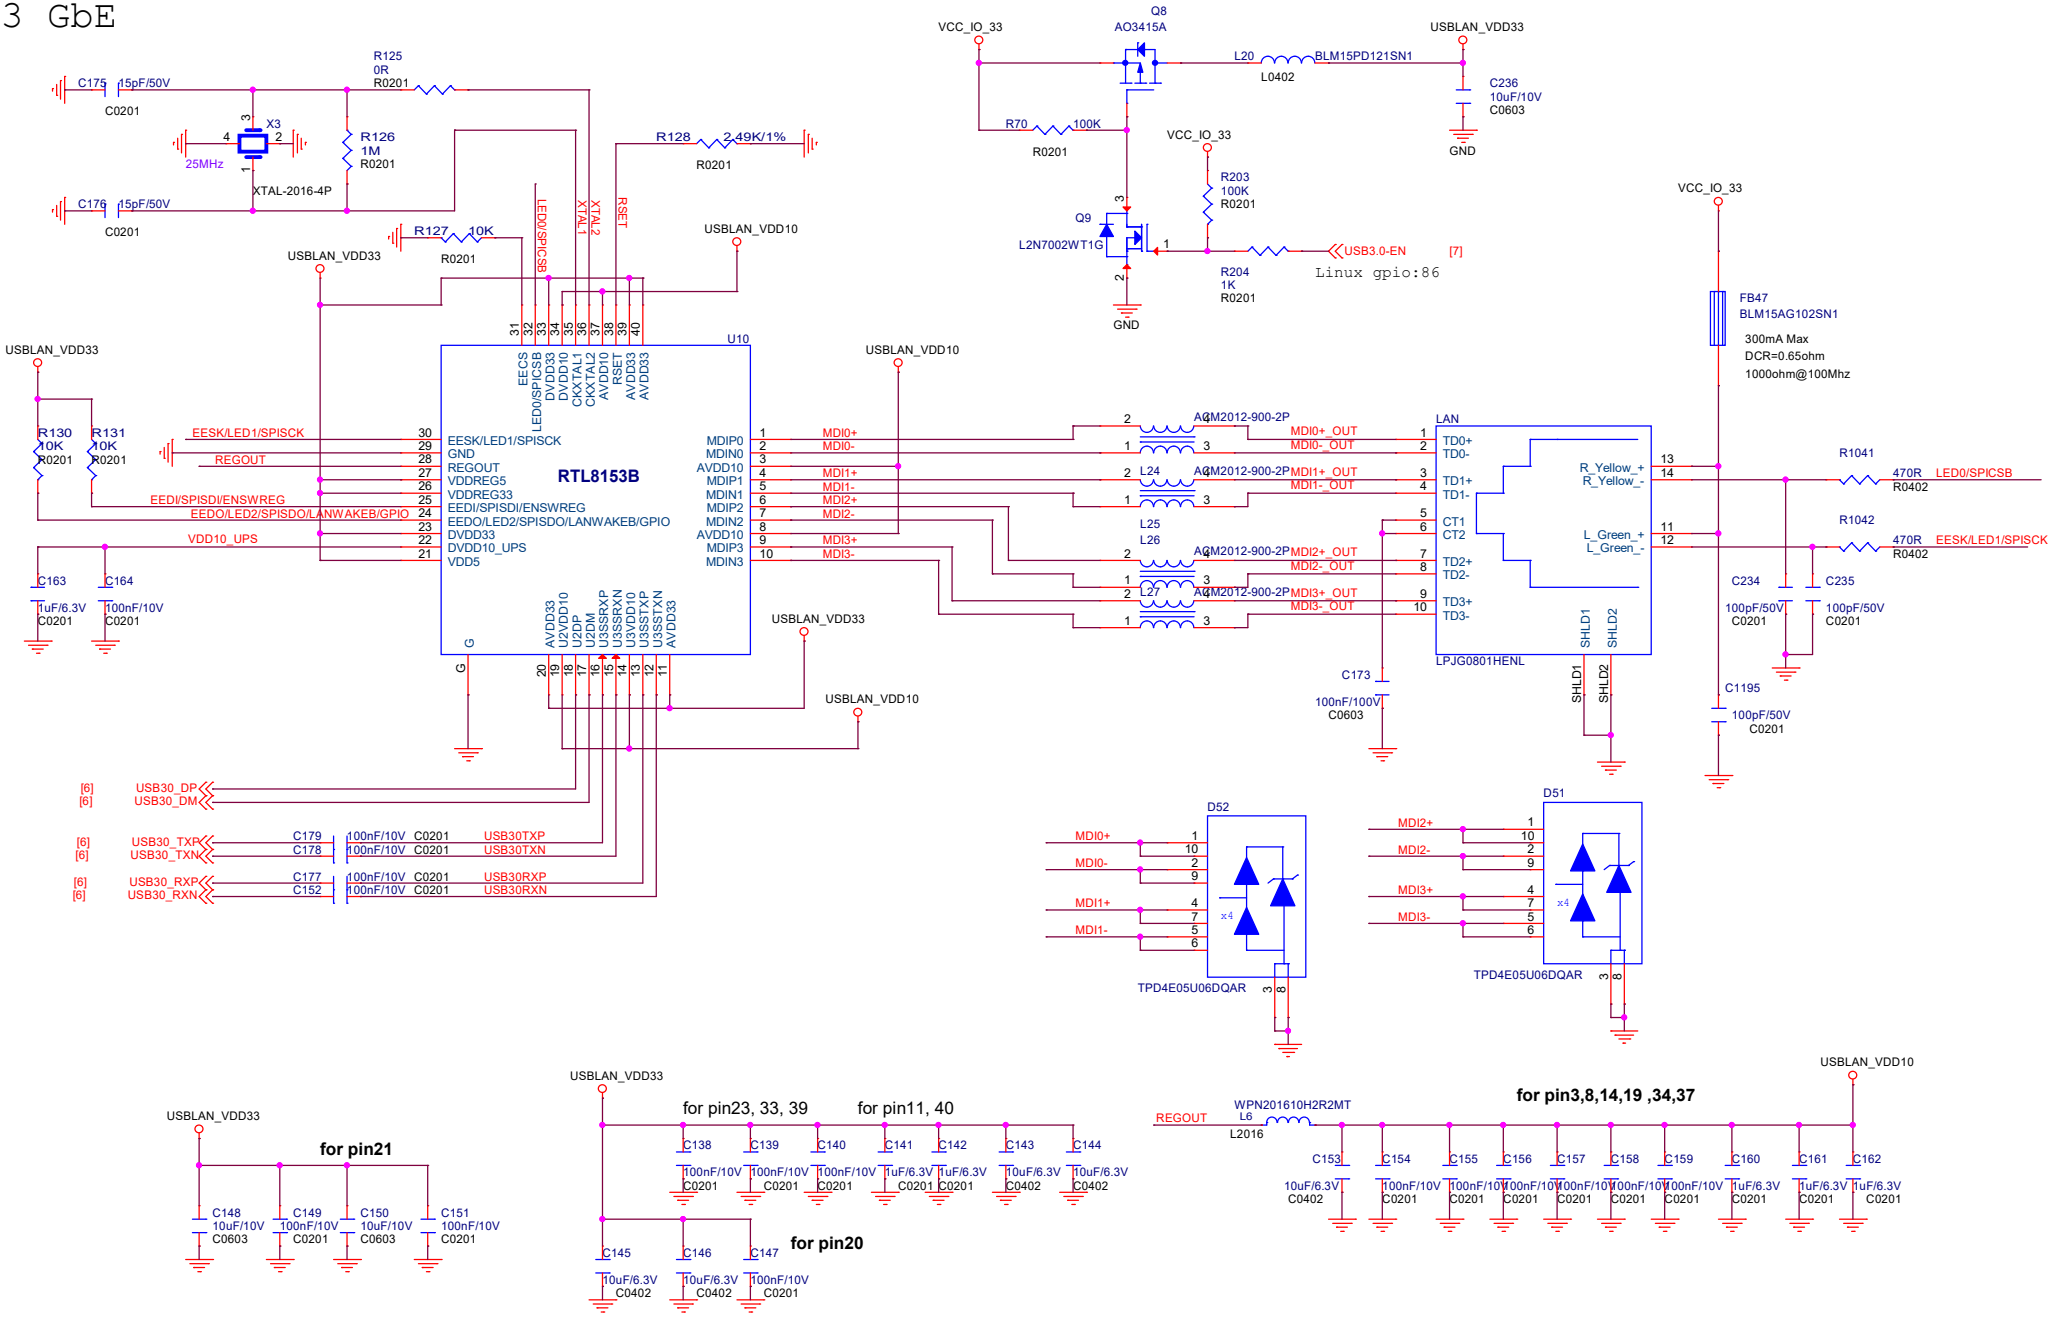


FRIENDLY ELEC Power & Source of Big Ideas
https://www.friendlyarm.com/
https://wiki.friendlyarm.com/

NanoPi R2C	Rev 2107
Size A3	Page Name 11.LAN 10/100M/1000M PHY
Date: Wednesday, August 04, 2021	Sheet: 11/ 12

5 4 3 2 1

D C B A

Native GbE

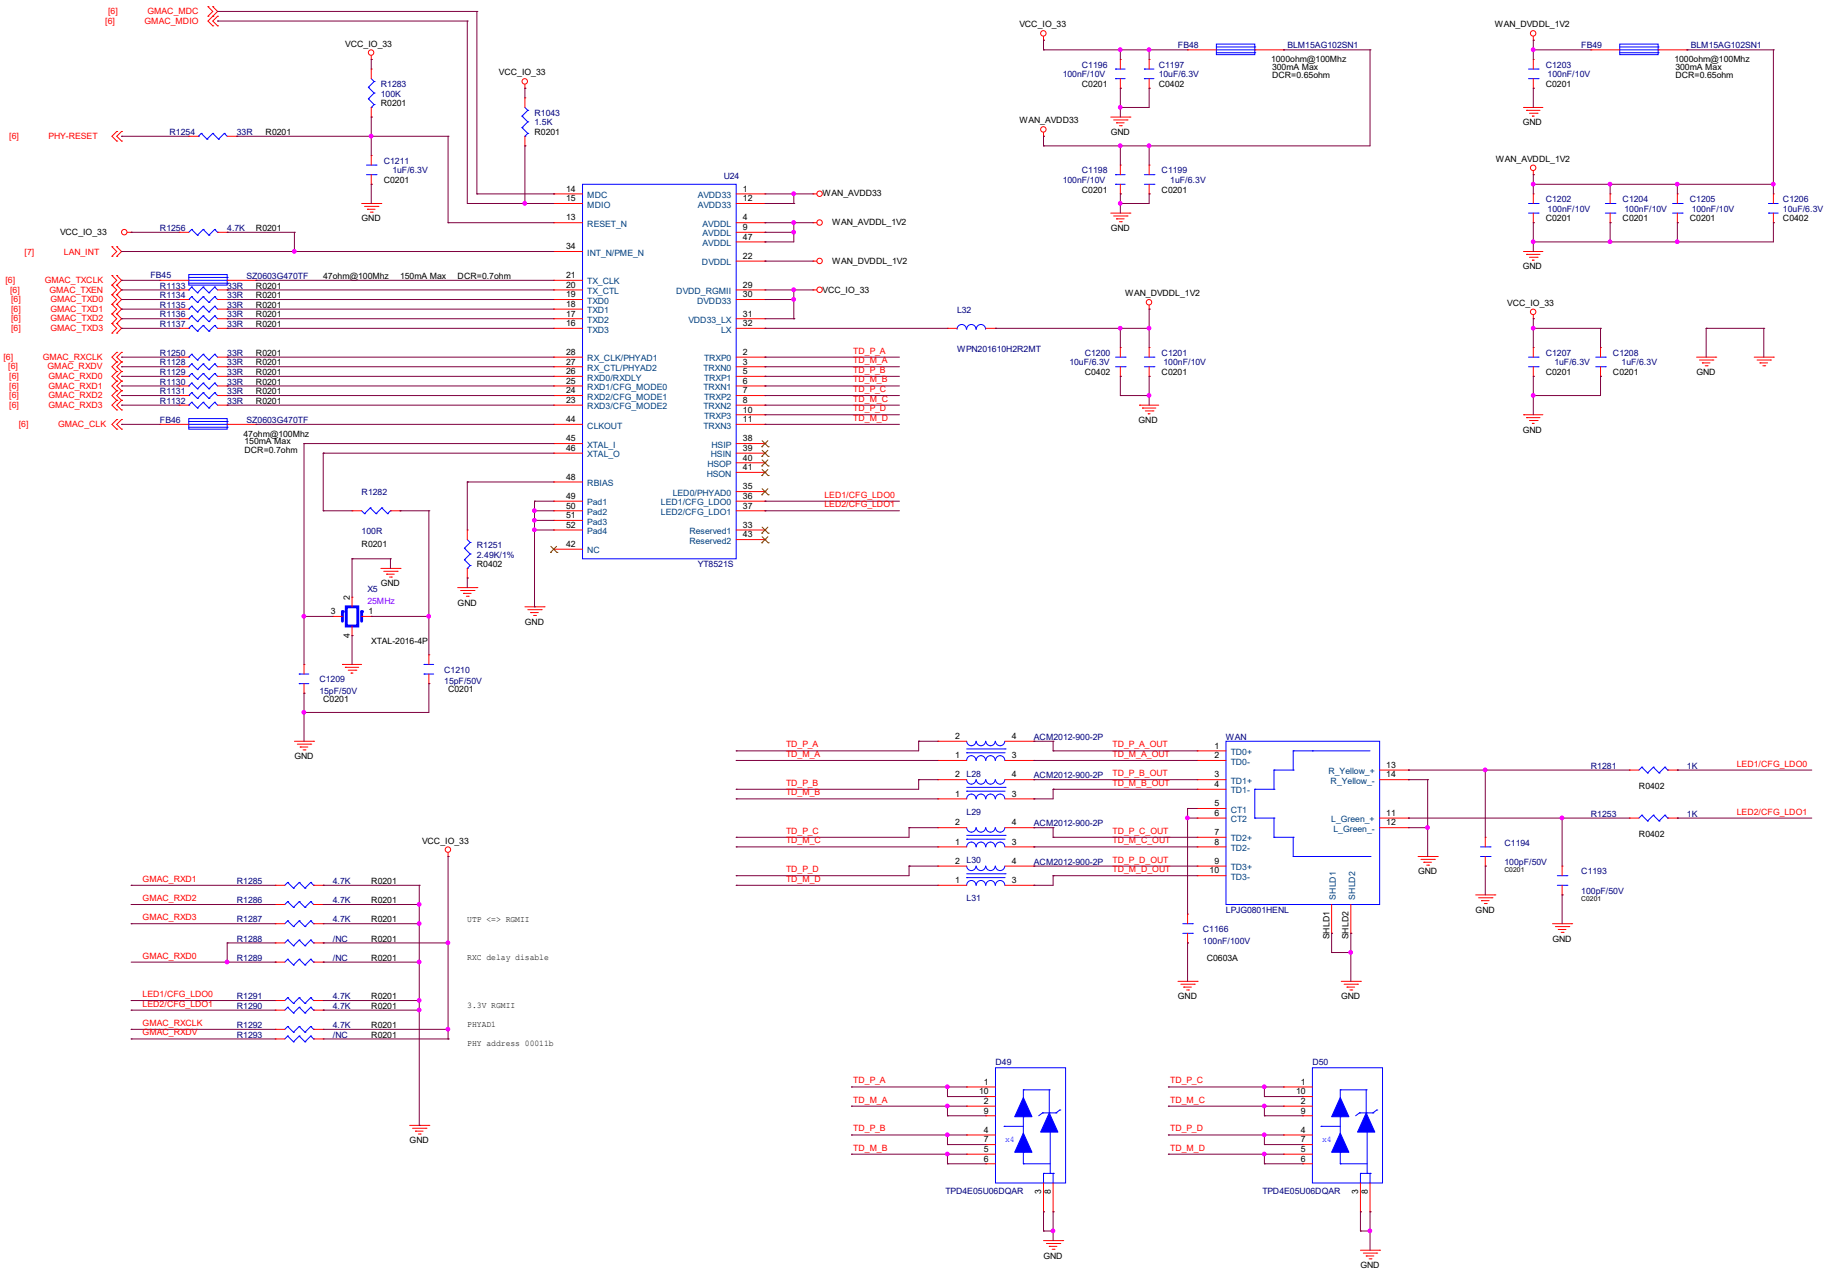

FRIENDLY ELEC Power & Source of Big Ideas
https://www.friendlyarm.com/
https://wiki.friendlyarm.com

NanoPi R2C		Rev 2107
Size A2	Page Name 12:WAN 10/100M/1000M PHY	
Date: Wednesday, August 04, 2021	Sheet: 12/ 12	