

1. Description

1.1. Project

Project Name	USB2SDIO
Board Name	custom
Generated with:	STM32CubeMX 6.1.0
Date	11/27/2020


1.2. MCU

MCU Series	STM32F1
MCU Line	STM32F103
MCU name	STM32F103RCTx
MCU Package	LQFP64
MCU Pin number	64

1.3. Core(s) information

Core(s)	Arm Cortex-M3


2. Pinout Configuration

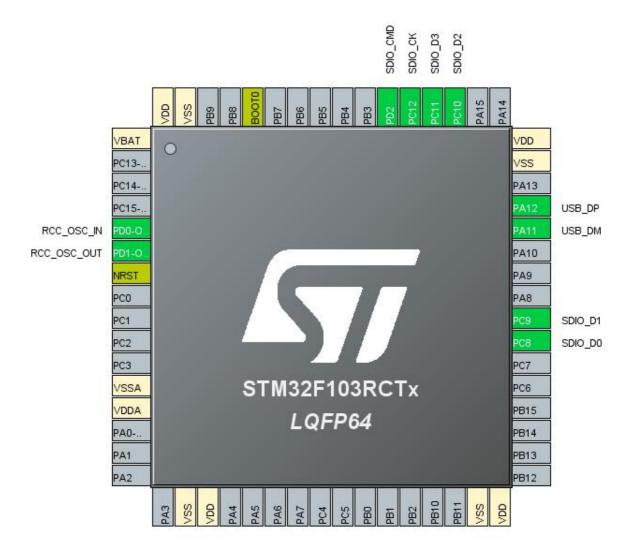

3. Pins Configuration

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
5	PD0-OSC_IN	I/O	RCC_OSC_IN	
6	PD1-OSC_OUT	I/O	RCC_OSC_OUT	
7	NRST	Reset		
12	VSSA	Power		
13	VDDA	Power		
18	VSS	Power		
19	VDD	Power		
31	VSS	Power		
32	VDD	Power		
39	PC8	I/O	SDIO_D0	
40	PC9	I/O	SDIO_D1	
44	PA11	I/O	USB_DM	
45	PA12	I/O	USB_DP	
47	VSS	Power		
48	VDD	Power		
51	PC10	I/O	SDIO_D2	
52	PC11	I/O	SDIO_D3	
53	PC12	I/O	SDIO_CK	
54	PD2	I/O	SDIO_CMD	
60	воото	Boot		
63	VSS	Power		
64	VDD	Power		

4. Clock Tree Configuration

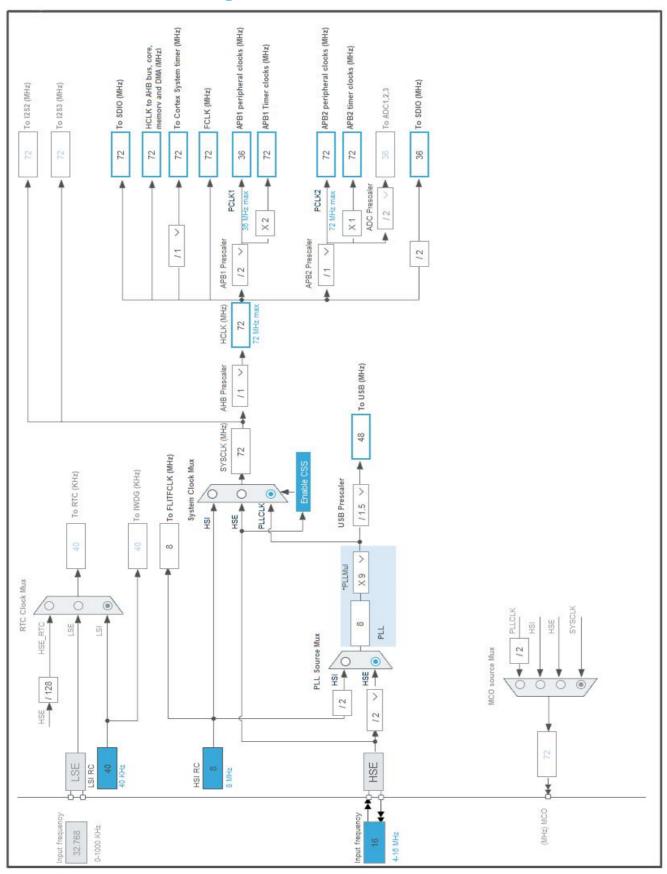

5. Software Project

5.1. Project Settings

Name	Value	
Project Name	USB2SDIO	
Project Folder	C:\Users\Jannis\Nextcloud\Projects\armbian-testing\usb2sdio\USB2SDIO	
Toolchain / IDE	STM32CubeIDE	
Firmware Package Name and Version	STM32Cube FW_F1 V1.8.3	
Application Structure	Advanced	
Generate Under Root	Yes	
Do not generate the main()	No	
Minimum Heap Size	0x200	
Minimum Stack Size	0x400	

5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Keep User Code when re-generating	Yes
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power	No
consumption)	
Enable Full Assert	No

5.3. Advanced Settings - Generated Function Calls

Rank	Function Name	Peripheral Instance Name
1	MX_GPIO_Init	GPIO
2	SystemClock_Config	RCC
3	MX_SDIO_SD_Init	SDIO
4	MX_USB_DEVICE_Init	USB_DEVICE

6. Power Consumption Calculator report

6.1. Microcontroller Selection

Series	STM32F1
Line	STM32F103
MCU	STM32F103RCTx
Datasheet	DS5792_Rev12

6.2. Parameter Selection

Temperature	25
Vdd	3.3

6.3. Battery Selection

Battery	Li-SOCL2(A3400)
Capacity	3400.0 mAh
Self Discharge	0.08 %/month
Nominal Voltage	3.6 V
Max Cont Current	100.0 mA
Max Pulse Current	200.0 mA
Cells in series	1
Cells in parallel	1


6.4. Sequence

Step	Step1	Step2
Mode	RUN	STOP
Vdd	3.3	3.3
Voltage Source	Battery	Battery
Range	No Scale	No Scale
Fetch Type	FLASH	n/a
CPU Frequency	72 MHz	0 Hz
Clock Configuration	HSE PLL	Regulator LP
Clock Source Frequency	8 MHz	0 Hz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	30.5 mA	25 μA
Duration	0.1 ms	0.9 ms
DMIPS	90.0	0.0
Та Мах	100.47	105
Category	In DS Table	In DS Table

6.5. Results

Sequence Time	1 ms	Average Current	3.07 mA
Battery Life	1 month, 15 days,	Average DMIPS	61.0 DMIPS
	15 hours		

6.6. Chart

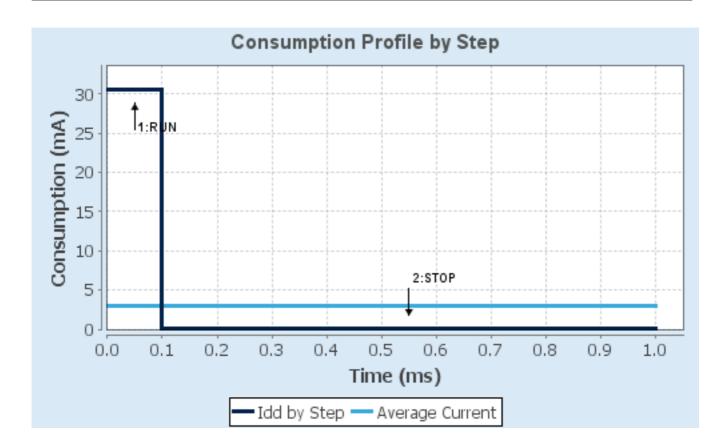

7. Peripherals and Middlewares Configuration

7.1. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

7.1.1. Parameter Settings:

System Parameters:

VDD voltage (V) 3.3
Prefetch Buffer Enabled

Flash Latency(WS) 2 WS (3 CPU cycle)

RCC Parameters:

HSI Calibration Value 16
HSE Startup Timout Value (ms) 100
LSE Startup Timout Value (ms) 5000

7.2. SDIO

Mode: SD 4 bits Wide bus 7.2.1. Parameter Settings:

SDIO parameters:

Clock transition on which the bit capture is made Rising transition

SDIO Clock divider bypass Disable

SDIO Clock output enable when the bus is idle

Disable the power save for the clock

SDIO hardware flow control

The hardware control flow is disabled

SDIOCLK clock divide factor

7.3. SYS

Debug: No Debug

Timebase Source: SysTick

7.4. USB

mode: Device (FS)

7.4.1. Parameter Settings:

Basic Parameters:

Speed Full Speed 12MBit/s

Power Parameters:

Low PowerDisabledLink Power ManagementDisabledBattery ChargingDisabled

7.5. USB_DEVICE

Class For FS IP: Mass Storage Class

7.5.1. Parameter Settings:

Basic Parameters:

USBD_MAX_NUM_INTERFACES (Maximum number of supported interfaces)

USBD_MAX_NUM_CONFIGURATION (Maximum number of supported configuration)

USBD_MAX_STR_DESC_SIZ (Maximum size for the string descriptors)

512

USBD_SELF_POWERED (Enabled self power)

Enabled

USBD_DEBUG_LEVEL (USBD Debug Level) 0: No debug message

Class Parameters:

MSC_MEDIA_PACKET (Media I/O buffer Size) 512

7.5.2. Device Descriptor:

Device Descriptor:

VID (Vendor IDentifier) 1155

LANGID_STRING (Language Identifier) English(United States)

MANUFACTURER_STRING (Manufacturer Identifier) STMicroelectronics

Device Descriptor FS:

PID (Product IDentifier) 22314

PRODUCT_STRING (Product Identifier) STM32 Mass Storage

CONFIGURATION_STRING (Configuration Identifier) MSC Config
INTERFACE_STRING (Interface Identifier) MSC Interface

* User modified value

8. System Configuration

8.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
RCC	PD0- OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PD1- OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SDIO	PC8	SDIO_D0	Alternate Function Push Pull	n/a	High	
	PC9	SDIO_D1	Alternate Function Push Pull	n/a	High	
	PC10	SDIO_D2	Alternate Function Push Pull	n/a	High	
	PC11	SDIO_D3	Alternate Function Push Pull	n/a	High	
	PC12	SDIO_CK	Alternate Function Push Pull	n/a	High	
	PD2	SDIO_CMD	Alternate Function Push Pull	n/a	High	
USB	PA11	USB_DM	n/a	n/a	n/a	
	PA12	USB_DP	n/a	n/a	n/a	

8.2. DMA configuration

nothing configured in DMA service

8.3. NVIC configuration

8.3.1. NVIC

Interrupt Table	Enable	Preenmption Priority	SubPriority		
Non maskable interrupt	true	0	0		
Hard fault interrupt	true	0	0		
Memory management fault	true	0	0		
Prefetch fault, memory access fault	true	0	0		
Undefined instruction or illegal state	true	0	0		
System service call via SWI instruction	true	0	0		
Debug monitor	true	0	0		
Pendable request for system service	true	0	0		
System tick timer	true	0	0		
USB low priority or CAN RX0 interrupts	true	0	0		
PVD interrupt through EXTI line 16	unused				
Flash global interrupt	unused				
RCC global interrupt	unused				
USB high priority or CAN TX interrupts	unused				
SDIO global interrupt	unused				

8.3.2. NVIC Code generation

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
Non maskable interrupt	false	true	false
Hard fault interrupt	false	true	false
Memory management fault	false	true	false
Prefetch fault, memory access fault	false	true	false
Undefined instruction or illegal state	false	true	false
System service call via SWI instruction	false	true	false
Debug monitor	false	true	false
Pendable request for system service	false	true	false
System tick timer	false	true	true
USB low priority or CAN RX0 interrupts	false	true	true

* User modified value

9. System Views

9.1. Category view

9.1.1. Current

10. Docs & Resources

Type Link

Datasheet http://www.st.com/resource/en/datasheet/CD00191185.pdf

Reference http://www.st.com/resource/en/reference_manual/CD00171190.pdf

manual

Programming http://www.st.com/resource/en/programming_manual/CD00228163.pdf

manual

Programming http://www.st.com/resource/en/programming_manual/CD00283419.pdf

manual

Errata sheet http://www.st.com/resource/en/errata_sheet/CD00197763.pdf

Application note http://www.st.com/resource/en/application_note/CD00160362.pdf

Application note http://www.st.com/resource/en/application_note/CD00164185.pdf

Application note http://www.st.com/resource/en/application_note/CD00167594.pdf

Application note http://www.st.com/resource/en/application_note/CD00200423.pdf

Application note http://www.st.com/resource/en/application_note/CD00211314.pdf

Application note http://www.st.com/resource/en/application_note/CD00249778.pdf

Application note http://www.st.com/resource/en/application_note/CD00259245.pdf

Application note http://www.st.com/resource/en/application_note/CD00264321.pdf

Application note http://www.st.com/resource/en/application_note/CD00264342.pdf

Application note http://www.st.com/resource/en/application_note/CD00264379.pdf

Application note http://www.st.com/resource/en/application_note/DM00024853.pdf

Application note http://www.st.com/resource/en/application_note/DM00032987.pdf

Application note http://www.st.com/resource/en/application_note/DM00033267.pdf

Application note http://www.st.com/resource/en/application_note/DM00033344.pdf

Application note http://www.st.com/resource/en/application_note/DM00042534.pdf

Application note http://www.st.com/resource/en/application_note/DM00052530.pdf

Application note http://www.st.com/resource/en/application_note/DM00073742.pdf

Application note http://www.st.com/resource/en/application_note/DM00080497.pdf

Application note http://www.st.com/resource/en/application_note/DM00129215.pdf

Application note http://www.st.com/resource/en/application_note/DM00160482.pdf http://www.st.com/resource/en/application_note/DM00156964.pdf Application note Application note http://www.st.com/resource/en/application_note/DM00209695.pdf Application note http://www.st.com/resource/en/application_note/DM00220769.pdf http://www.st.com/resource/en/application_note/DM00257177.pdf Application note Application note http://www.st.com/resource/en/application_note/DM00272912.pdf http://www.st.com/resource/en/application_note/DM00236305.pdf Application note Application note http://www.st.com/resource/en/application_note/DM00296349.pdf Application note http://www.st.com/resource/en/application note/DM00325582.pdf Application note http://www.st.com/resource/en/application note/DM00327191.pdf Application note http://www.st.com/resource/en/application_note/DM00354244.pdf Application note http://www.st.com/resource/en/application_note/DM00315319.pdf Application note http://www.st.com/resource/en/application_note/DM00380469.pdf Application note http://www.st.com/resource/en/application_note/DM00395696.pdf http://www.st.com/resource/en/application_note/DM00493651.pdf Application note Application note http://www.st.com/resource/en/application_note/DM00536349.pdf