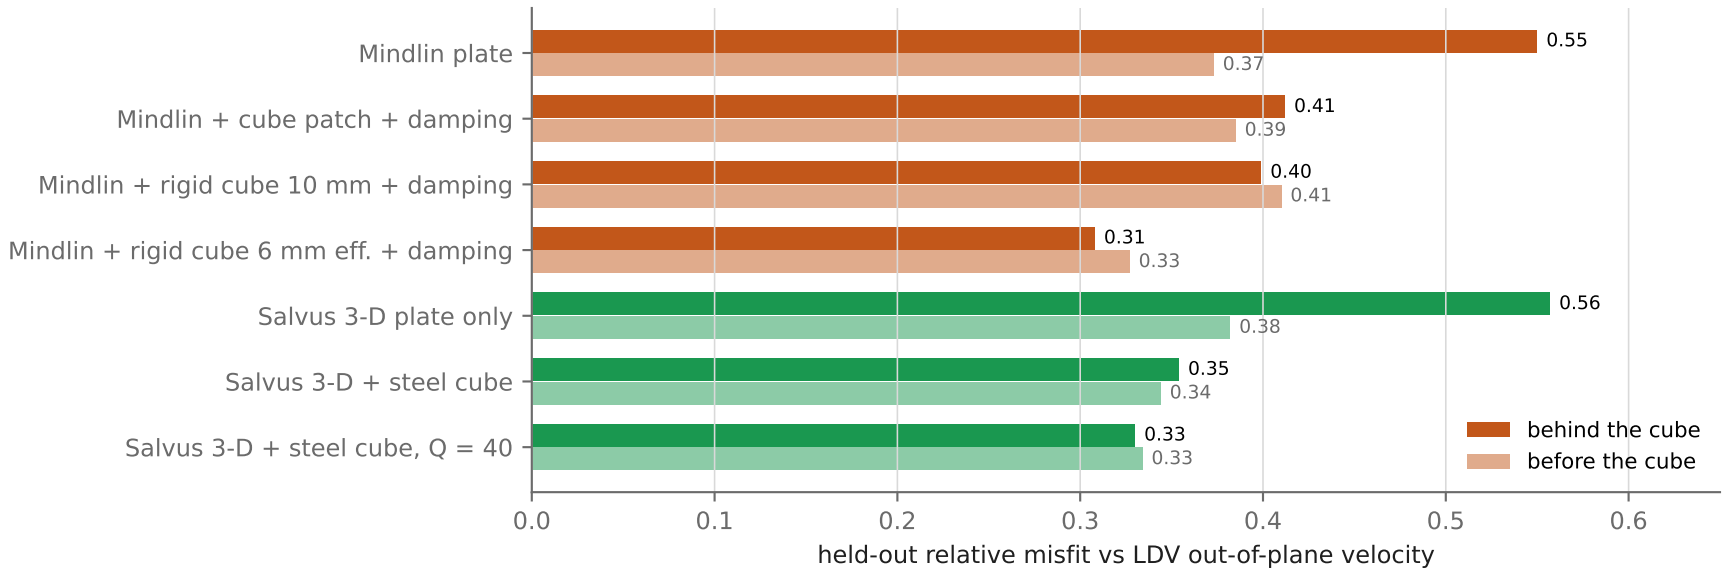
Mindlin plate
Mindlin + cube patch + damping
Mindlin + rigid cube 10 mm + damping
Mindlin + rigid cube 6 mm eff. + damping
Salvus 3-D plate only
Salvus 3-D + steel cube
Salvus 3-D + steel cube, Q = 40
0.55
0.37
0.41
0.39
0.40
0.41
0.31
0.33
0.56
0.38
0.35
0.34
0.33
0.33
behind the cube
before the cube
0.0
0.1
0.2
0.3
0.4
0.5
0.6
held-out relative misfit vs LDV out-of-plane velocity