


Serie Series	
Bezeichnung Designation	WICSTYLE 65N FP
Klassifizierungs-Nr. Classification-no.	322102402-A-NA
Anwendung Application	Festverglasung Fixed glazing
Feuerwiderstandsklasse nach DIN EN 1634/ 13501 Fire resistance according to DIN EN 1634/ 13501	E30
Verglasungstyp: Dicke: Glazing type: thickness:	max. Scheibengrößen max. glass sizes
Pilkington Pyroclear 30-001 (6 mm)	1680 x 3497 mm / A ≤ 4.94 m² oder 2435 x 1680 mm / A ≤ 3.44 m² oder 2435 x 3497 mm / A ≤ 4.98 m² Zusätzlich sind die Zulassungs- bzw. Liefergrenzen des Glaslieferanten zu beachten.
max. Elementhöhe max. element height	L = 3600 mm
Einbruchhemmung burglar resistance	_____
Wandanschlüsse Wall junctions	Tragkonstruktion: Massivwände geringer Rohdichte ≥ 600 kg/m³ und Wanddicke ≥ 115 mm. Massivwände hoher Rohdichte ≥ 900 kg/m³ und Wanddicke ≥ 115 mm. Metallständerwände mindestens Gruppe A gemäß EN 1363-1, Ständer > 50 mm, Beplankung ≥ 1 x 12.5 mm, Feuerwiderstand ≥ EW 30. Ständerwände mit Ständer aus Holz, Beplankung je Seite sowie Laibung ≥ 1 x 12.5 mm, Feuerwiderstand ≥ EW 30. Supporting structure: solid walls of low bulk density ≥ 600 kg/m³ and wall thickness ≥ 115 mm. solid walls of high bulk density ≥ 900 kg/m³ and wall thickness ≥ 115 mm. Metal base walls at least group A according to EN 1363-1, pillar > 50 mm, planking ≥ 1 x 12.5 mm, Fire resistance ≥ EW 30. Stud walls with wooden posts, planking per side as well as reveal ≥ 1 x 12.5 mm, Fire resistance ≥ EW 30.

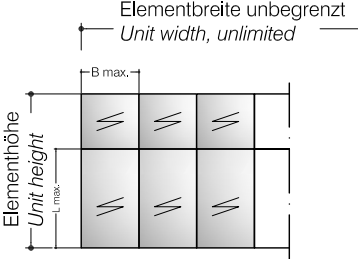