POLITECNICO DI TORINO

Master's Degree in Electronics

Master's Degree Thesis

Loss analysis of a 4-level,flying capacitor,bridge-less,totem-pole PFC

Supervisors
Prof. Francesco MUSOLINO
Ing. Marco PALMA

Candidate
Giorgio ARMIGNACCO

MONTH 2026

Table of Contents

1 SPICE model Validation 3
1.1 Fast Leg GaN FET model validation 3
1.1.1 Static charateristics 4
1.1.2 Dynamic Charateristics 12
1.2 Capacitors model validation 15

List of Tables 17

List of Figures 18

Bibliography 19

Chapter 1

SPICE model Validation

In order to properly analyze more critical components in terms of losses , is useful to first create a digital model of the device,a validation procedure of the SPICE models of each device has been performed. The following sections describes the procedure and results of this validation procedure.

All simulation results are available [1]

1.1 Fast Leg GaN FET model validation

This section describes the behavior of the SPICE model of EPC2304, compared to the EPC datasheet [2]

1.1.1 Static charateristics

Output I-V charateristics

```
.temp 25

.dc Vds 0 6 0.1 Vgs list 2 3 4 5
```

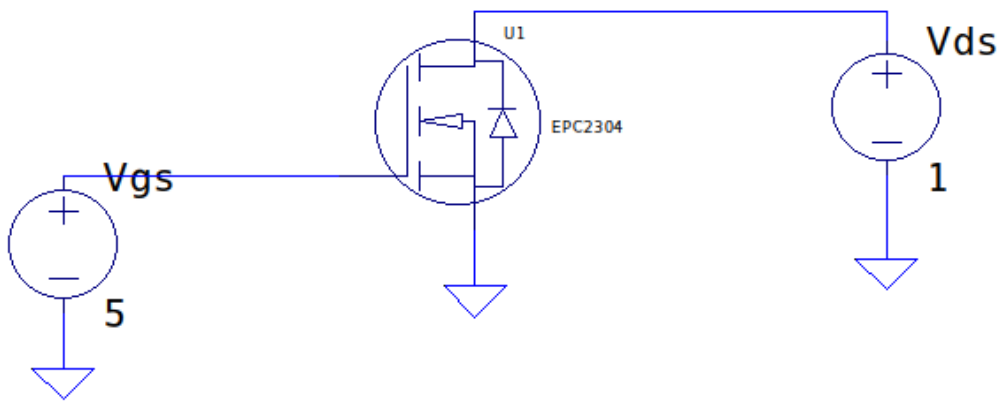

Figure 1.1: Schematic for I-V validation

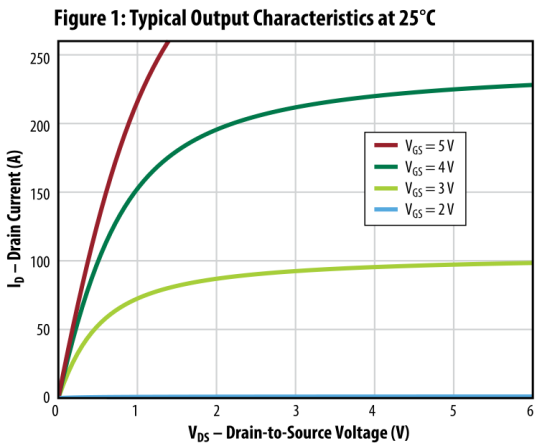

Figure 1.2: Datasheet I-V

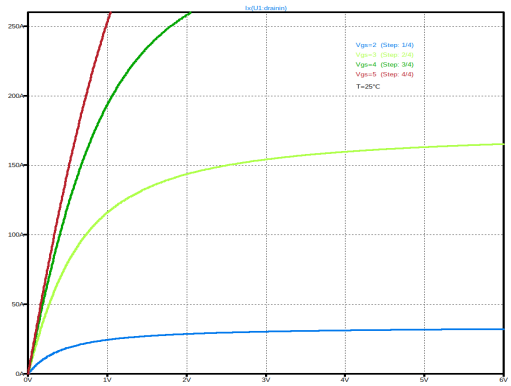

Figure 1.3: SPICE I-V

Vds@Vgs	Ids (datasheet)	Ids (simulation)
Vds=1V;Vgs=2V	$\approx 0A$	25.13A
Vds=6V;Vgs=3V	$\approx 100A$	163.15A
Vds=1V;Vgs=4V	$\approx 150A$	187.12A
Vds=1V;Vgs=5V	$\approx 215A$	253.07A

Table 1.1: I-V data comparision

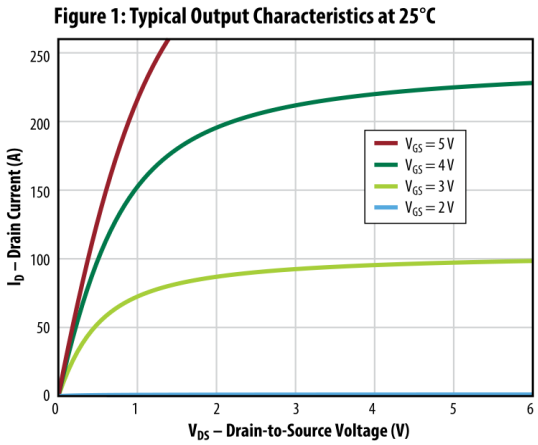

Figure 1.4: Datasheet I-V

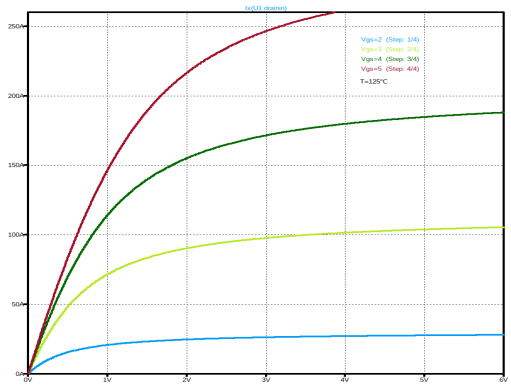

Figure 1.5: SPICE I-V @125°C

Trans charateristics

```
.step temp 25 125 100

.temp 25

.dc Vgs 0.5 5 0.1
```

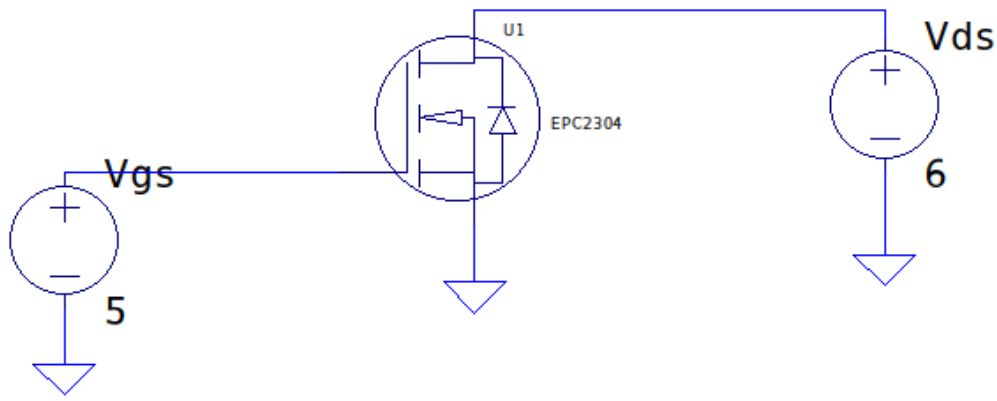

Figure 1.6: Schematic for trans charateristics validation

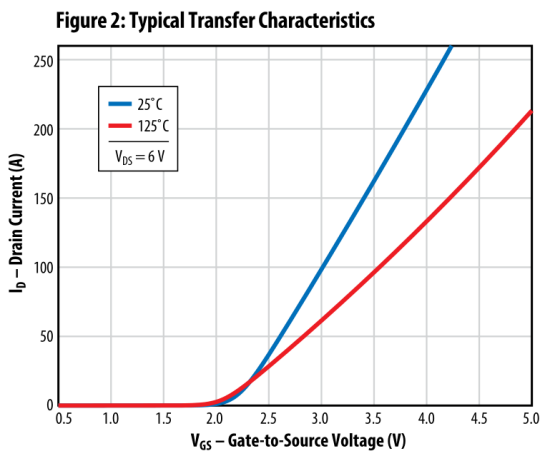

Figure 1.7: Datasheet trans charateristics

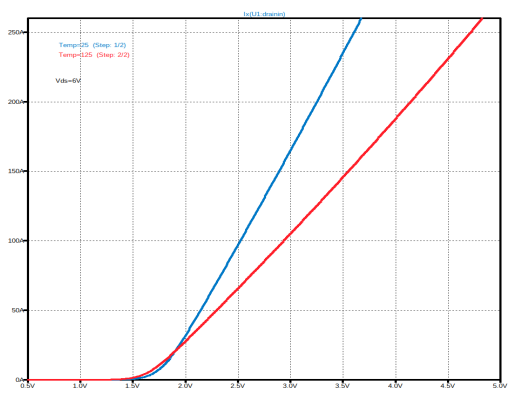

Figure 1.8: SPICE trans charateristics

Comparing the 2 it seems like the real device has a Vth of $\approx 2V$,while the simulated one has a Vth of $\approx 1.5V$

Vgs@T	Ids (datasheet)	Ids (simulation)
Vgs=2.5V;T=25°C	$\approx 40A$	98.58A
Vgs=3V;T=25°C	$\approx 100A$	163.15A
Vgs=3.5;T=125°C	$\approx 100A$	148.12A
Vgs=4.5V;T=125°C	$\approx 175A$	238.07A

Table 1.2: I-V data comparision

Rdson

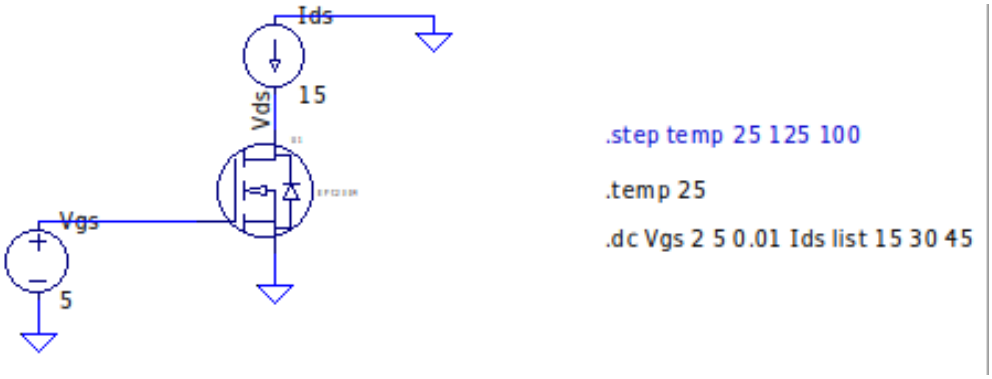

Figure 1.9: Schematic for Rdson validation

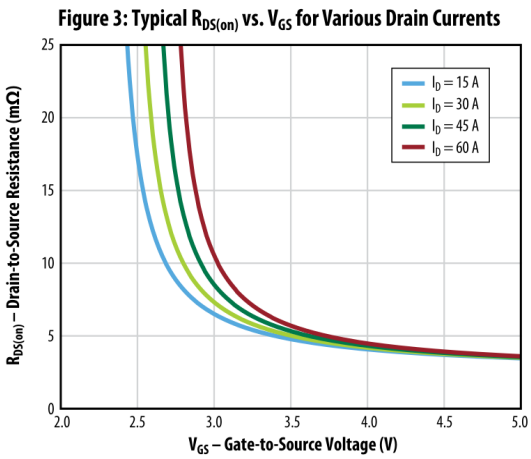

Figure 1.10: Datasheet Rdson

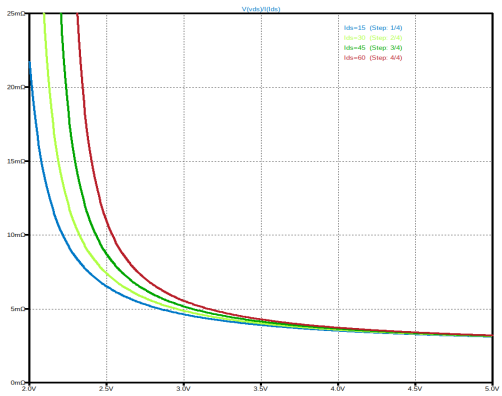

Figure 1.11: SPICE Rdson @25°C

Vgs@Ids	Rds (datasheet)	Rds (simulation)
Vgs=2V;Id=15A	$\approx 17.5m\Omega$	$6.8m\Omega$
Vgs=3V;Ids=60A	$\approx 10m\Omega$	$6m\Omega$
Vgs=2V;Ids=15A	$+\infty$	$22m\Omega$
Vgs=5V	$\approx 4m\Omega$	$3.78m\Omega$

Table 1.3: Rds data comparision

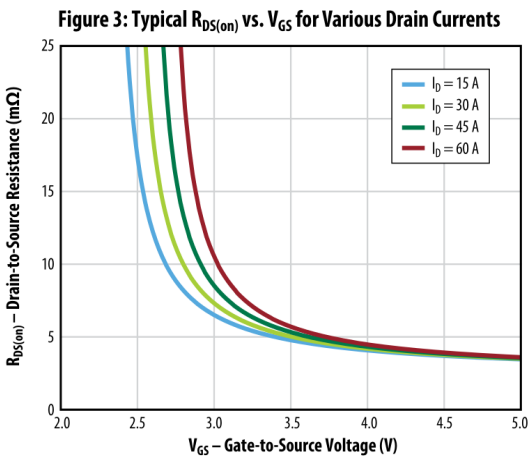

Figure 1.12: Datasheet Rdson

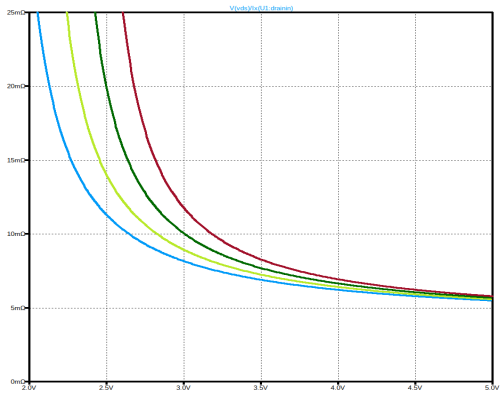

Figure 1.13: SPICE Rdson @125°C

Rdson vs tempearture

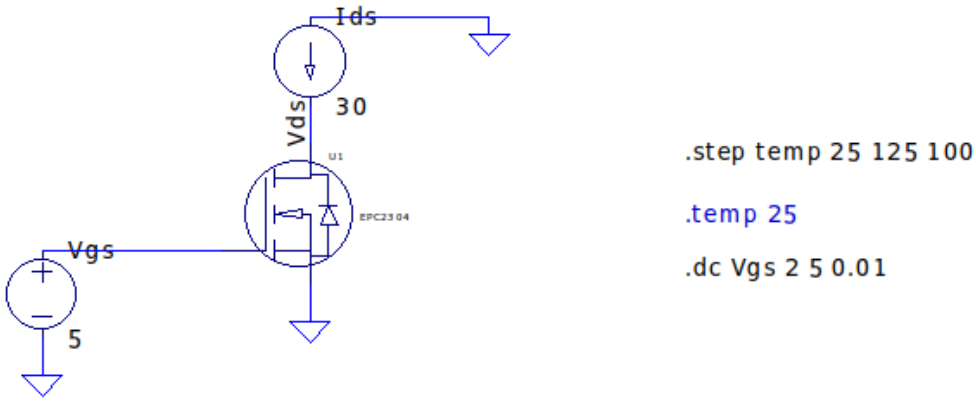

Figure 1.14: Schematic for Rdson vs tempearture

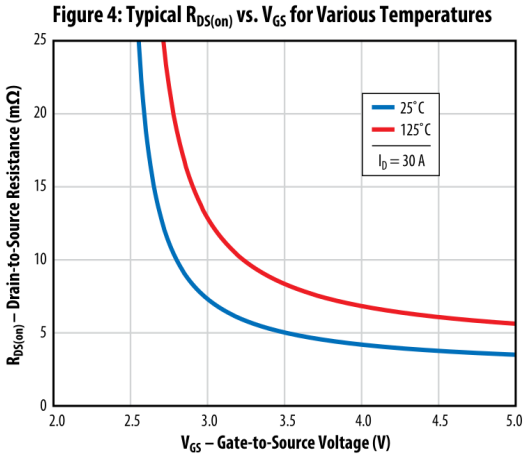

Figure 1.15: Datasheet Rdson vs tempearture

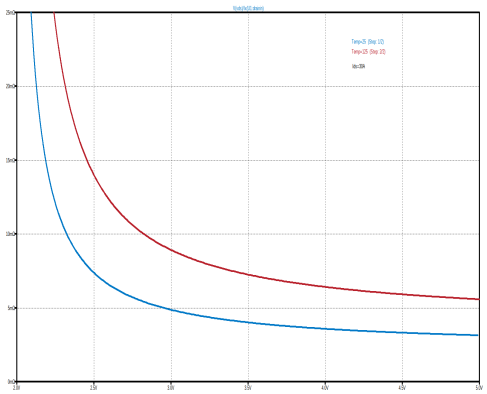

Figure 1.16: SPICE Rdson vs tempearture

Vgs@T	Rds (datasheet)	Rds (simulation)
Vgs=3.5V;T=25°C	$\approx 5m\Omega$	$4.6m\Omega$
Vgs=5V;T=125°C	$\approx 5.5m\Omega$	$5.8m\Omega$
Vgs=2.95V;T=25°C	$\approx 7m\Omega$	$5m\Omega$
Vgs=2.3V@T=25°C	$+\infty$	$10m\Omega$
Vgs=2.3V@T=125°C	$+\infty$	$21.2m\Omega$

Table 1.4: Rds temperature comparision

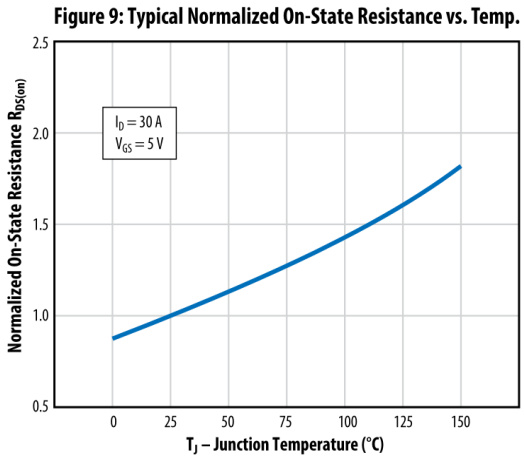

Figure 1.17: Datasheet Rdson vs temperature

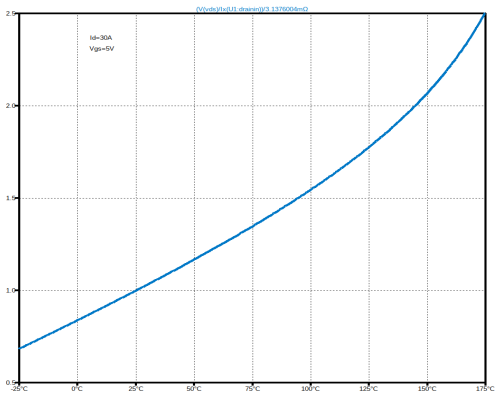

Figure 1.18: SPICE Rdson vs temperature

Reverse body diode

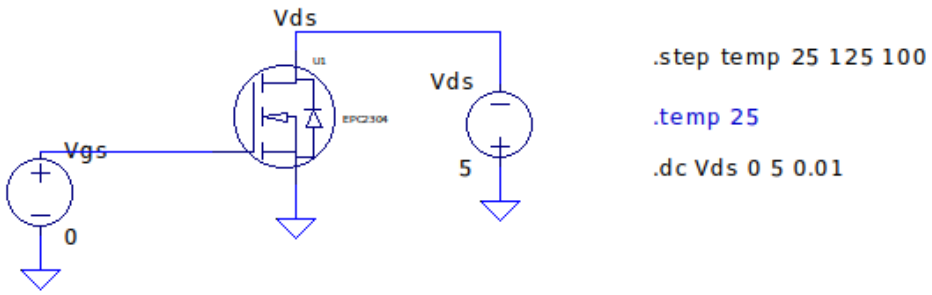

Figure 1.19: Schematic for Reverse body diode

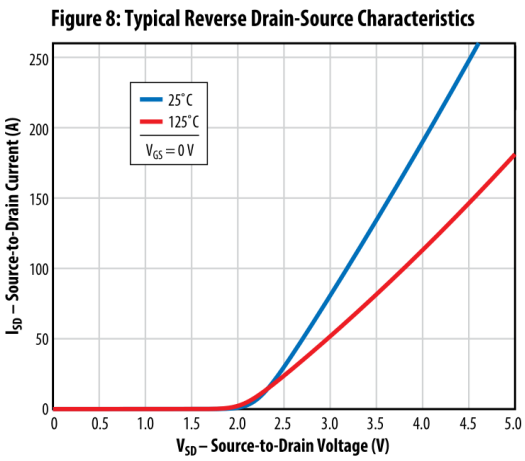

Figure 1.20: Datasheet Reverse body diode

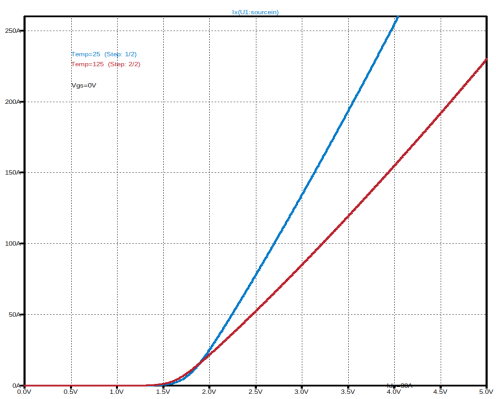

Figure 1.21: SPICE Reverse body diode

Vgs@T	Rds (datasheet)	Rds (simulation)
Vss=4.5V;T=25°C	$\approx 250A$	$317A$
Vsd=3V;T=125°C	$\approx 50A$	$88.7A$
Vsd=4.5V;T=125°C	$\approx 148A$	$191A$

Table 1.5: Reverse diode data comparision

Vth vs temperature

Figure 1.22: Schematic for Vth vs temperature

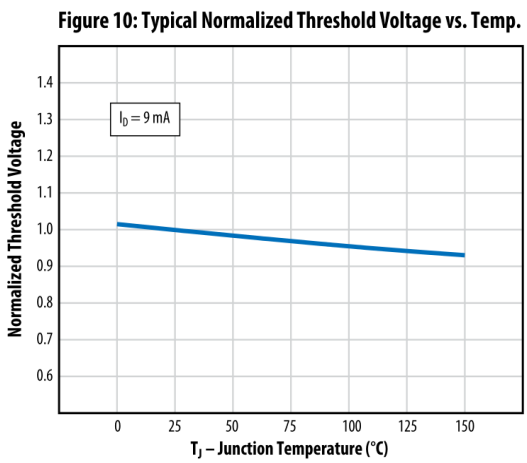

Figure 1.23: Datasheet Vth vs temperature

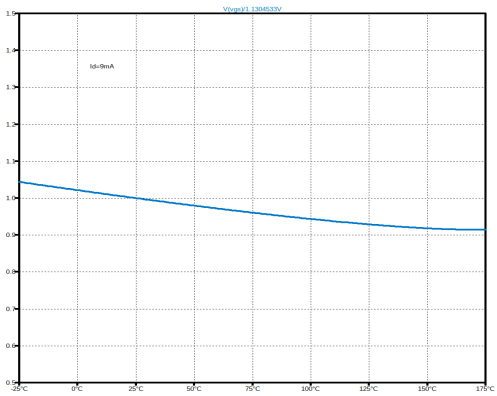

Figure 1.24: SPICE Vth vs temperature

1.1.2 Dynamic Charateristics

Typical switching curves

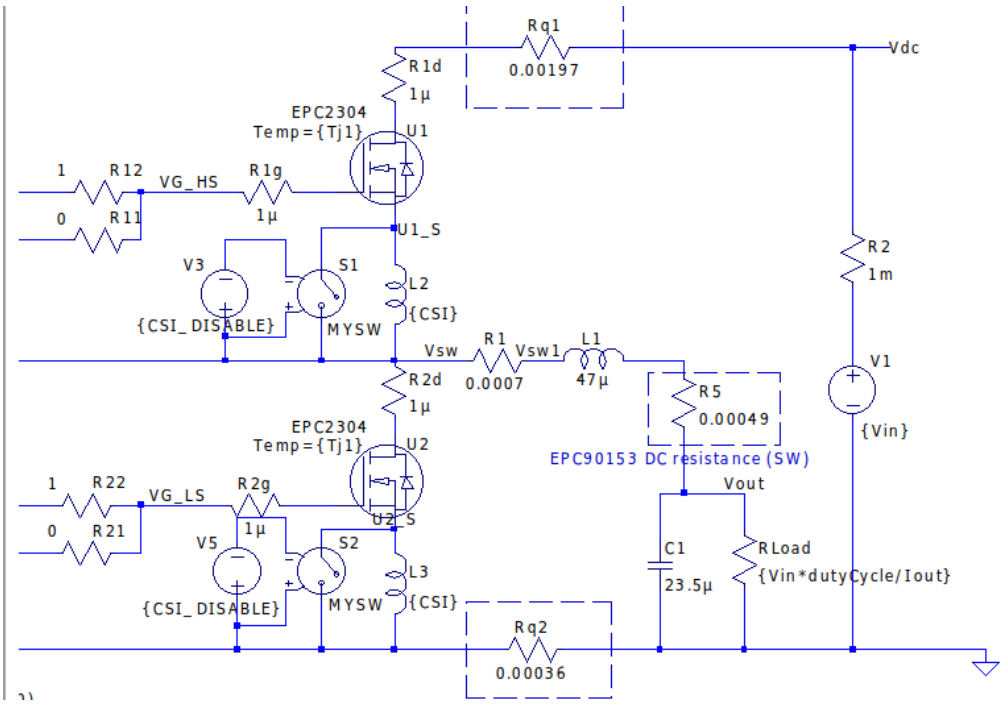

Figure 1.25: Schematic for switching behaviour

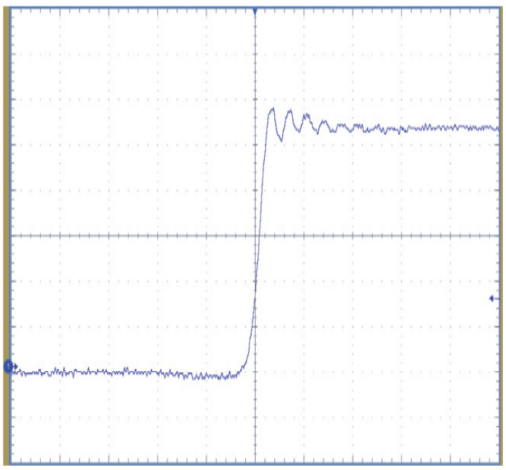

Figure 1.26: Datasheet Turn on curve

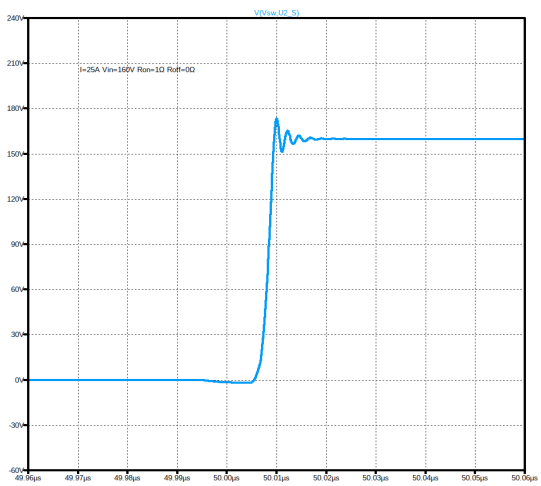

Figure 1.27: SPICE Turn on curve

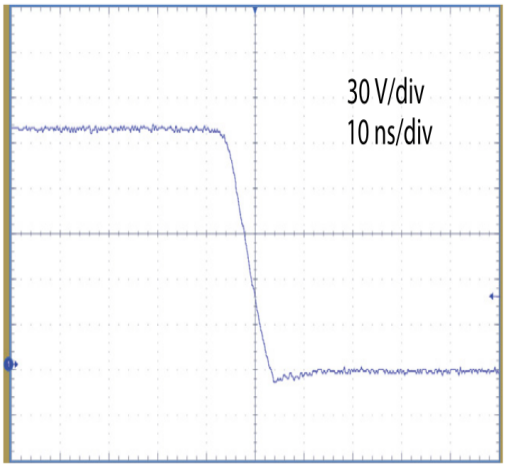

Figure 1.28: Datasheet Turn off curve

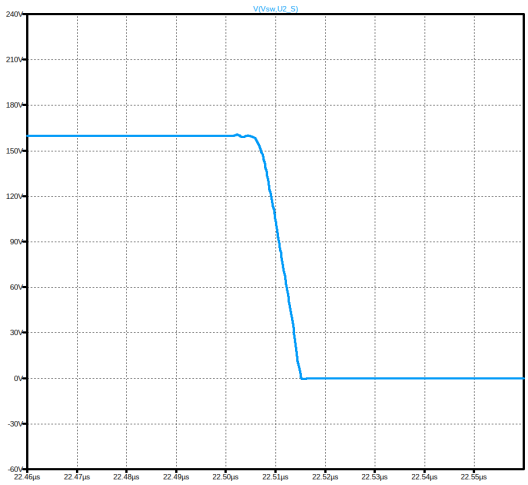

Figure 1.29: SPICE Turn off curve

Typical gate charge

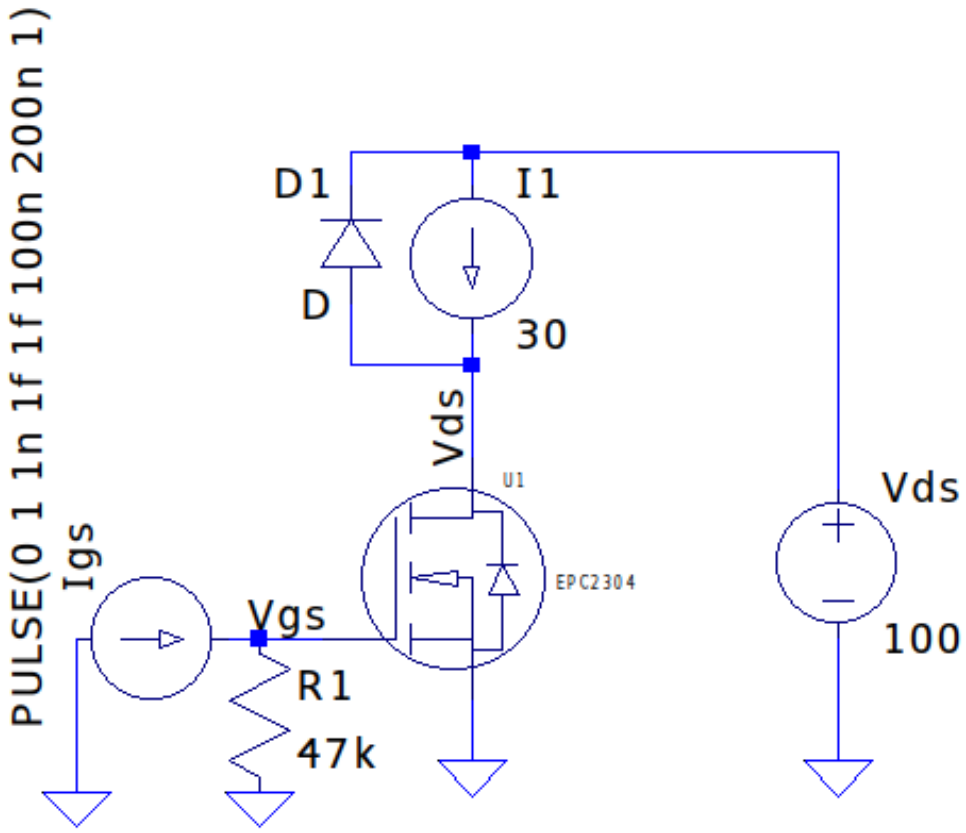

Figure 1.30: Schematic for gate charge

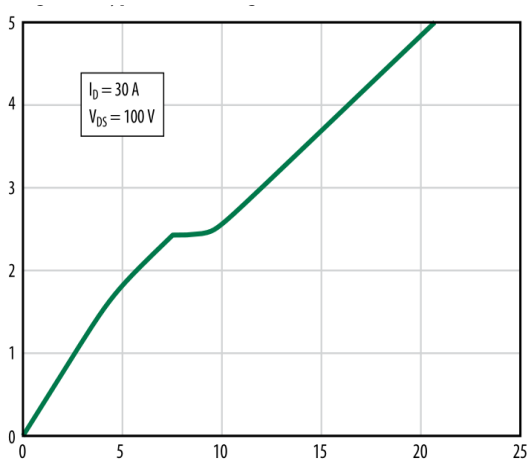

Figure 1.31: Datasheet gate charge

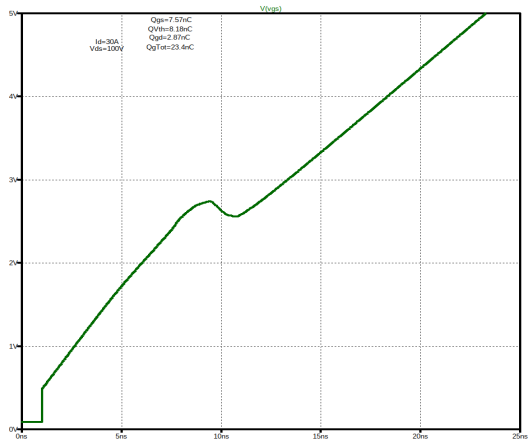

Figure 1.32: SPICE gate charge

Q (datasheet)	Q (simulation)
Qgtot=21nC	Qgtot=23.4nC
Qgs=7.5nC	Qgs=7.57nC
Qgd=2nC	Qgd=2.87nC
QVth=5.2nC	QVth=8.18nC

Table 1.6: Gate charge data comparision

1.2 Capacitors model validation

This section briefly describes the SPICE model behavior compared to the datasheet described behavior

Flying capacitor

no particular notes needed,model fits real behavior,no temperature model available [3]

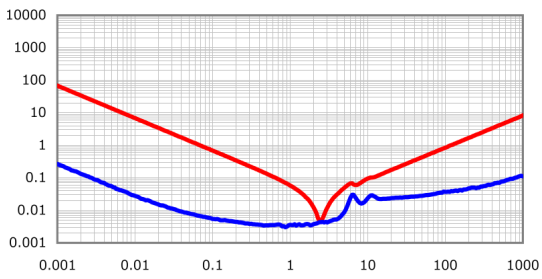

Figure 1.33: Datasheet Z

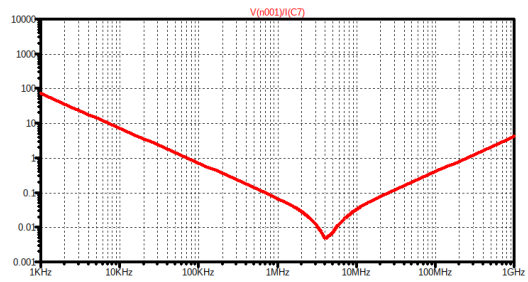

Figure 1.34: SPICE Z

HF decoupling capacitor

no particular notes needed,model fits real behavior,no temperature model available [4]

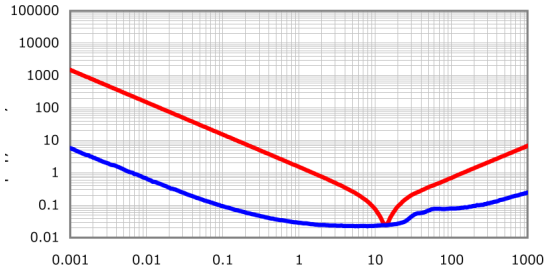

Figure 1.35: Datasheet Z

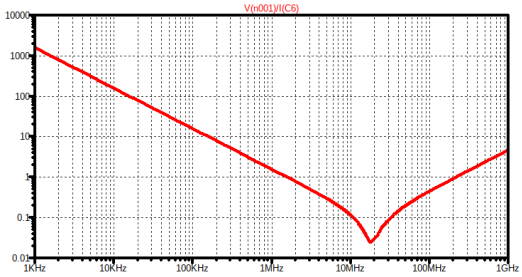

Figure 1.36: SPICE Z

List of Tables

1.1 I-V data comparision 5
1.2 I-V data comparision 7
1.3 Rds data comparision 8
1.4 Rds temperature comparision 9
1.5 Reverse diode data comparision 10
1.6 Gate charge data comparision 15

List of Figures

1.1 Schematic for I-V validation . . . 4
1.2 Datasheet I-V . . . 4
1.3 SPICE I-V . . . 4
1.4 Datasheet I-V . . . 5
1.5 SPICE I-V @125°C . . . 5
1.6 Schematic for trans charateristics validation . . . 6
1.7 Datasheet trans charateristics . . . 6
1.8 SPICE trans charateristics . . . 6
1.9 Schematic for Rdson validation . . . 7
1.10 Datasheet Rdson . . . 7
1.11 SPICE Rdson @25°C . . . 7
1.12 Datasheet Rdson . . . 8
1.13 SPICE Rdson @125°C . . . 8
1.14 Schematic for Rdson vs tempearture . . . 8
1.15 Datasheet Rdson vs tempearture . . . 9
1.16 SPICE Rdson vs tempearture . . . 9
1.17 Datasheet Rdson vs temperature . . . 9
1.18 SPICE Rdson vs temperature . . . 9
1.19 Schematic for Reverse body diode . . . 10
1.20 Datasheet Reverse body diode . . . 10
1.21 SPICE Reverse body diode . . . 10
1.22 Schematic for Vth vs temperature . . . 11
1.23 Datasheet Vth vs temperature . . . 11
1.24 SPICE Vth vs temperature . . . 11
1.25 Schematic for switching behaviour . . . 12
1.26 Datasheet Turn on curve . . . 12
1.27 SPICE Turn on curve . . . 12
1.28 Datasheet Turn off curve . . . 13
1.29 SPICE Turn off curve . . . 13
1.30 Schematic for gate charge . . . 14
1.31 Datasheet gate charge . . . 15
1.32 SPICE gate charge . . . 15
1.33 Datasheet Z . . . 15
1.34 SPICE Z . . . 15
1.35 Datasheet Z . . . 16
1.36 SPICE Z . . . 16

Bibliography

[1] Giorgio Armignacco. *Thesis repository*. https://github.com/arminioboy/PoliTOThesis. 2026 (cit. on p. 3).

[2] EPC-CO. *eGaN® FET DATASHEET EPC2304*. https://epc-co.com/epc/Portals/0/epc/documents/datasheets/EPC2304_datasheet.pdf. 2025 (cit. on p. 3).

[3] TDK. *charasheet*. https://product.tdk.com/system/files/dam/doc/product/capacitor/ceramic/mlcc/charasheet/c5750x6s2w225k250ka.pdf. 2016 (cit. on p. 15).

[4] TDK. *charasheet*. https://product.tdk.com/system/files/dam/doc/product/capacitor/ceramic/mlcc/charasheet/c3216x7t2w104k160aa.pdf. 2016 (cit. on p. 16).