

Based on
Mastering Networks - An Internet Lab Manual
by Jörg Liebeherr and Magda Al Zarki

Adapted for
'Labo Computernetwerken'
by Johan Bergs, Nicolas Letor, Michael Voorhaen and Kurt Smolderen

Completed by
Josse Coen Armin Halilovic Jonas Vanden Branden Group 2

April 18, 2016

Lab 4

Dynamic Routing Protocols (RIP and OSPF)

What you will learn in this lab:

- How to configure the routing protocols RIP, OSPF, and BGP on a Linux PC and a Cisco router.
- How those routing protocols update the routing tables after a change in the network topology.
- How the count-to-infinity problem in RIP can be avoided.
- How OSPF achieves a hierarchical routing scheme through the use of multiple areas.

4.1 Prelab 4

Routing protocols

- *Distance Vector and Link State Routing Protocols*: Go to the website http://docwiki.cisco.com/wiki/Internetworking_Technology_Handbook and read the article about dynamic routing protocols. Review your knowledge of interdomain and intradomain routing, distance vector routing, and link state routing.
- *Zebra*: Go to the website of the Zebra fork Quagga at <http://www.nongnu.org/quagga/> and study the information on the Quagga routing protocol software for Linux systems. Also find and read the man pages on zebra, ripd, ospfd and bgpd. Note: Quagga is a fork of the GNU Zebra project.
- *RIP*: Read the overview of the Routing Information Protocol (RIP) and study the commands to configure RIP on a Cisco router at <http://www.routeralley.com/guides/rip.pdf>.
- *OSPF*: Read the overview of Open Shortest Path First (OSPF) routing protocol and study the commands to configure OSPF on a Cisco router at <http://www.routeralley.com/guides/ospf.pdf>.

Prelab Questions

Question 1)

Provide the command that configures a Linux PC as an IP router (see Lab 3).

`sysctl net.ipv4.ip_forward=1`

Question 2)

What are the main differences between a distance vector routing protocol and a link state routing protocol? Give examples for each type of protocol.

**** dit nakijken, ik heb de dingen wat gecopy pasted ****

RIP is a distance vector routing protocol. OSPF is a link state routing protocol.

A distance vector routing algorithm will get the shortest path, while link state routing goes for the fastest path.

Distance vector: routing information is only exchanged between directly connected neighbors; a router cannot see beyond its own neighbors.

Link state: information is flooded throughout the link-state domain (an area in OSPF) to ensure all routers possess a synchronized copy of the area's link-state database.

Question 3)

What are the differences between an intradomain routing protocol (also called interior gateway protocol or IGP) and an interdomain routing protocol (also called exterior gateway protocol or EGP)? Give examples for each type of protocol.

Intradomain routing protocols are used for routing in one network. Examples are RIP and OSPF.

Interdomain routing protocols are used for routing between different networks. For example: BGP.

Question 4)

Which routing protocols are supported by the software package Zebra?

OSPFv2, OSPFv3, RIPv1, RIPv2, RIPv6, BGP-4, IS-IS for IPv4, OLSR

Question 5)

In the Zebra software package, the processes `ripd`, `ospfd`, and `bgpd` deal, respectively, with the routing protocols RIP, OSPF, and BGP. Which role does the process `zebra` play?

From the zebra documentation, we learn the following:

`zebra` is an IP routing manager. It provides kernel routing table updates, interface lookups, and redistribution of routes between different routing protocols.

Question 6)

Describe how a Linux user accesses the processes of Zebra (`zebra`, `ripd`, `ospfd`, `bgpd`) processes to configure routing algorithm parameters?

To enable the processes, the user can edit the entries in `/etc/quagga/daemons`.

The processes can then be started/stopped with `/etc/init.d/quagga` command. For each process, a configuration file in `/etc/quagga` (e.g. `ripd.conf`) can be edited (or created if there is no file) to configure routing algorithm parameters.

Question 7)

What is the main difference between RIP version 1 (RIPv1) and RIP version 2 (RIPv2)?

RIPv1 is a classful routing protocol, whereas RIPv2 is a classless one.

This means that RIPv2 can send subnet masks in RIP updates to other routers but RIPv1 cannot.

Question 8)

Explain what it means to "run RIP in passive mode".

In passive mode, incoming RIP packets are processed, but does no RIP packets are transmitted.

Question 9)

Explain the meaning of "triggered updates" in RIP.

In RIP, a triggered update means that a router sends a RIP packet with a routing update, whenever one of its routing table entries changes.

Question 10)

Explain the concept of split-horizon in RIP?

The split-horizon method in RIP is used to prevent routing loops by forbidding a router from advertising a route back to the interface from which it was learned.

Question 11)

What is an autonomous system (AS)? Which roles do autonomous systems play in the Internet?

An autonomous system is a group of IP networks under the authority of a single administration. The entire Internet is carved up into a large number of autonomous systems.

Question 12)

What is the AS number of your institution? Which autonomous system has AS number 1?

Numbers 1-6: Assigned by ARIN

AS1: LVLT-1 - Level 3 Communications, Inc.,US

** uantwerpen nummer? **

Question 13)

Explain the terms: Stub AS, Multi-homed AS and Transit AS?

- A stub autonomous system is an autonomous system that is connected to only one other autonomous system.
- A multi-homed autonomous system is an autonomous system that is connected to more than one other autonomous system.
- A transit autonomous system is an autonomous system that provides its neighbor ASs to connect to each other through itself.

4.2 Lab 4

In the previous lab, you learned how to configure routing table entries manually. This was referred to as static routing. The topic of Lab 4 is dynamic routing, where dynamic routing protocols (from now on, called routing protocols) set the routing tables automatically without human intervention. Routers and hosts that run a routing protocol, exchange routing protocol messages related to network paths and node conditions, and use these messages to compute paths between routers and hosts.

Most routing protocols implement a shortest-path algorithm, which, for a given set of routers, determines the shortest paths between the routers. Some routing protocols allow that each network interface be assigned a cost metric. In this case, routing protocols compute paths with least cost. Based on the method used to compute the shortest or least-cost paths, one distinguishes distance vector and link state routing protocols. In a distance vector routing protocol, neighbouring routers send the content of their routing tables to each other, and update the routing tables based on the received routing tables. In a link state routing protocol, each router advertises the cost of each of its interfaces to all routers in the network. Thus, all routers have complete knowledge of the network topology, and can locally run a shortest-path (or least-cost) algorithm to determine their own routing tables.

The notion of an autonomous system (AS) is central to the understanding of routing protocols on the Internet. An autonomous system is a group of IP networks under the authority of a single administration, and the entire Internet is carved up into a large number of autonomous systems. Examples of autonomous systems are the campus network of a university and the backbone network of a global network service provider. Each autonomous system is assigned a globally unique identifier, called the AS number. On the Internet, dynamic routing within an autonomous system and between autonomous systems is handled by different types of routing protocols. A routing protocol that is concerned with routing within an autonomous system is called an intradomain routing protocol or interior gateway protocol (IGP). A routing protocol that determines routes between autonomous systems is called an interdomain routing protocol or exterior gateway protocol (EGP).

In this lab, you study the two most common intradomain protocols, namely, the Routing Information Protocol (RIP) and the Open Shortest Path First (OSPF) protocol. Parts 1-3 of this lab deal with RIP, and Parts 4-5 are about OSPF.

This lab uses two different network configurations. The first network configuration, shown in Figure 4.1, is used in Parts 1-2, and is modified in Part 3 (Figure 4.3). The network configuration in Parts 4 and 5 is shown in Figure 4.4.

Part 1. Configuring RIP on a Cisco router

This lab starts with the same network topology as used in Part 5 of Lab 3. Different from Lab 3, where the routing tables were configured manually, here you run the routing protocol RIP to perform the same task. In Part 1, you configure RIP on the Cisco routers. In Part 2, you configure RIP on the Linux PCs.

RIP is one of the oldest dynamic routing protocols on the Internet that is still in use. This lab uses the latest revision of RIP, RIPv2 (RIP version 2). RIP is an intradomain routing protocol that uses a distance vector approach to determine the paths between routers. RIP minimizes the number of hops of each path, where each point-to-point link or LAN constitutes a hop.

Each RIP enabled router periodically sends the content of its routing table to all its neighbouring routers in an update message. For each routing table entry, the router sends the destination (host IP address or network IP address) and the distance to that destination measured in hops. When a router receives an update message from a neighbouring router, it updates its own routing table.

Figure 4.1 and Table 4.1 describe the network configuration for this part of the lab.

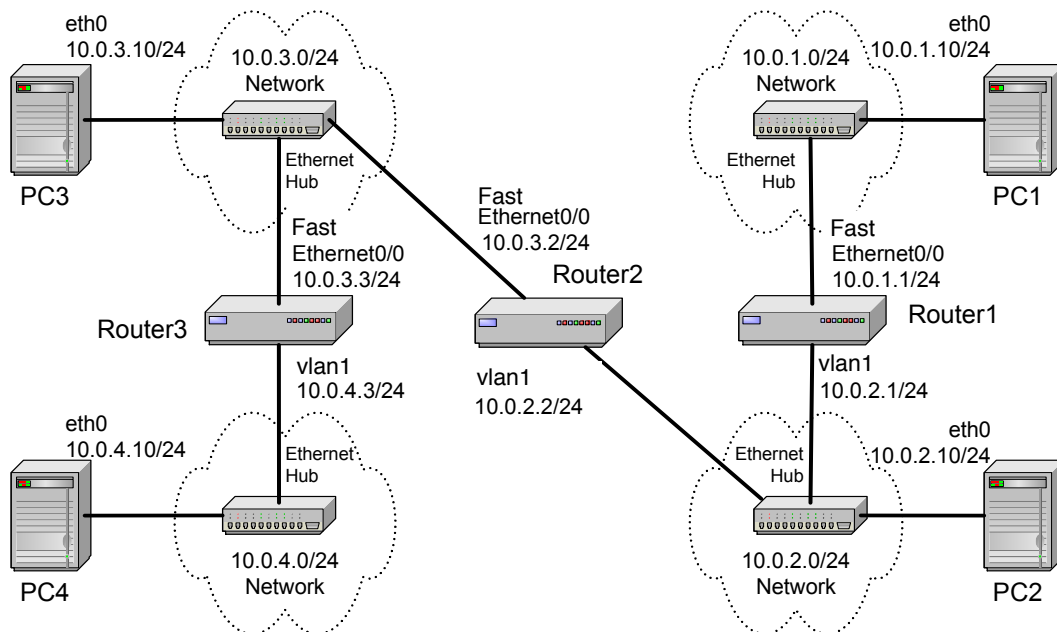


Figure 4.1: Network configuration for Parts 1 and 2.

Exercise 1. Configuring RIP on Cisco routers

Configure all three Cisco routers to run the routing protocol RIP. Once the configuration is completed, all Cisco routers can issue ping commands to each other. Below, we give a brief overview of the basic commands used to configure RIP on a Cisco router.

The following can be executed in the Global Configuration mode.

Linux PC	eth0	eth1
PC1	10.0.1.10/24	Disabled
PC2	10.0.2.10/24	Disabled
PC3	10.0.3.10/24	Disabled
PC4	10.0.4.10/24	Disabled
Cisco Router	FastEthernet0/0	vlan1
Router1	10.0.1.1/24	10.0.2.1/24
Router2	10.0.3.2/24	10.0.2.2/24
Router3	10.0.3.3/24	10.0.4.3/24

Table 4.1: IP addresses

- Enable the routing protocol RIP on the local router, and enters the router configuration mode from the following prompt:

```
| Router1(config-router)#
```

You return from the router configuration command to the global configuration command by typing the command `exit`.

```
| router rip
```

- Disable RIP on the local router.

```
| no router rip
```

The following can can be executed in the Privileged EXEC mode.

- Enable a debugging mode where the router displays a message for each received RIP packet.

```
| debug ip rip
```

- Disable the debugging feature

```
| o debug ip rip
```

The following can can be executed in the Router Configuration mode.

- Associate the network IP address *Netaddr* with RIP. RIP sends updates only on interfaces where the network address has been associated with RIP.

```
| etwork Netaddr
```

- Disable RIP for the specified network address.

```
| no network Netaddr
```

- Set the interface *Iface* in RIP passive mode. On an interface in passive mode, the router processes incoming RIP packets, but does not transmit RIP packets.

```
| passive-interface Iface
```

- Enable active mode on interface *Iface*. This means that RIP packets are transmitted on this interface.

```
|no passive-interface Iface
```

- Increase the metric (hop count) of incoming RIP packets that arrive on interface *Iface* by *value*, where *value* is a number.

```
|offset-list 0 in value Iface
```

- Increase the metric of outgoing RIP packets that are sent on interface *Iface* by *value*.

```
offset-list 0 out value Iface
\end{verbatim}
\item Disable the specified offset-list command for incoming RIP packets.
\begin{cmtblock}
no offset-list 0 in value Iface
```

- Disable the specified offset-list command for outgoing RIP packets.

```
|no offset-list 0 out value Iface
```

- Set the RIP version to RIPv2.

```
|version 2
```

- Set the values of the timers in the RIP protocol. The timers are measured in seconds.

```
|timers basic update invalid hold-down flush
```

update : The time interval between transmissions of RIP update messages (Default: 30 sec).

invalid : The time interval after which a route, which has not been updated, is declared invalid (Default: 180 sec).

hold-down : Determines how long after a route has been updated as unavailable, a router will wait before accepting a new route with a lower metric. This introduces a delay for processing incoming RIP packets with routing updates after a link failure (Default: 180 sec).

flush : The amount of time that must pass before a route that has not been updated is removed from the routing table (Default: 240 sec).

Example:

```
|Router1(config-router)# timers basic 30 180 180 240
```

- Set the router to not perform triggered updates, when the next transmission of routing updates is due in time. If time is set to the same value as the update timer, then triggered updates are disabled. In RIP, a triggered update means that a router sends a RIP packet with a routing update, whenever one of its routing table entries changes.

```
|flash-update-threshold time
```

1. Connect the the Linux PCs and the Cisco routers as shown in Figure 4.1. The PCs and routers are connected with Ethernet hubs.
2. Verify that the serial interfaces of the PCs are connected to the console port of the routers. PC1 should be connected to Router1, PC2 to Router2, and so on. Once the serial cables are connected, establish a minicom session from each PC to the connected router.
3. On Router1, Router2, and Router3, configure the IP addresses as shown in Table 4.1, and enable the routing protocol RIP. The commands to set up Router1 are as follows:

```
Router1> enable Password: <enable secret>
Router1# configure terminal
Router1(config)# no ip routing
Router1(config)# ip routing
Router1(config)# router rip
Router1(config-router)# version 2
Router1(config-router)# network 10.0.0.0
Router1(config-router)# interface FastEthernet0/0
Router1(config-if)# no shutdown
Router1(config-if)# ip address 10.0.1.1 255.255.255.0
Router1(config-if)# interface FastEthernet0/1
Router1(config-if)# no shutdown
Router1(config-if)# interface vlan1
Router1(config-if)# no shutdown
Router1(config-if)# ip address 10.0.2.1 255.255.255.0
Router1(config-if)# end
Router1# clear ip route *
```

The command `no ip routing` is used to reset all previous configurations related to routing (RIP, OSPF, etc). The command `clear ip route *` deletes all entries in the routing table. Make sure that all static routing entries are removed, since, in IOS, RIP does not overwrite static routing entries.

4. After you have configured the routers, check the routing table at each router by typing

```
Router1# show ip route
```

Each router should have four entries in the routing table: two entries for directly connected networks, and two other entries for remote networks that were added by RIP.

5. From each router, issue a ping command to the IP addresses of interfaces *FastEthernet0/0* and *vlan1* on all remote routers. For example, to issue a ping from Router1 to interface *FastEthernet0/0* on Router2, type

```
Router1# ping 10.0.3.2
```

Once you can successfully contact the IP addresses of all routers, proceed to the next exercise.

Part 2. Configuring RIP on a Linux PC

In this part of the lab, you continue with the network configuration in Figure 4.1 and Table 4.1, and configure RIP on the Linux PCs.

In Figure 4.1, all Linux PCs are set up as hosts. Since hosts do not perform IP forwarding, they need not send routing messages. Therefore, when a routing protocol is configured on a host, the protocol is set to run in passive mode, where a host receives and processes incoming routing messages, but does not transmit routing messages. (We note that, normally, routing protocols are not enabled on hosts. Instead, one generally configures a static routing table entry for the default gateway. Obviously, when a routing protocol is enabled, there is no need to configure a default gateway.)

The configuration of routing protocols on Linux PCs in Lab 4 is done with the routing software package Quagga. Before starting the exercise, we give a brief tutorial on the Quagga software package. The tutorial focuses on the features used in the lab exercises and omits many interesting features of Zebra.

An Introduction to Quagga

Quagga is a software package that manages the routing tables of a Linux system, and that provides the ability to execute a variety of routing protocols. For this course we make use of Quagga, which is a fork of the GNU Zebra project and while the project has a new name, many of the references to Zebra still remain, e.g. there is still a `zebra` control process.

The Quagga architecture, shown in Figure 4.2, consists of a set of processes. The process `zebra` updates the routing tables and exchanges routes between different routing protocols. Each routing protocol has a separate process, and each routing process can be started, stopped, configured, and upgraded independently of the other routing processes. The process `zebra` must be invoked prior to starting and configuring any of the routing protocols. The routing processes used in this lab and the routing protocols they manage are shown in table 4.2.

Routing Process	Routing Protocol
<code>ripd</code>	RIPv1 and RIPv2
<code>ospfd</code>	OSPFv2 (Version 2)

Table 4.2: Quagga routing processes used for this lab.

(a) Adding the directory with Quagga commands to the search path

On Ubuntu systems, the script to start, stop and control the `zebra` process and its routing processes is located in directory `/etc/init.d`.

```
| PC1% /etc/init.d/quagga start
```

(b) Starting and stopping Quagga processes

```
/etc/init.d/quagga start
    Start the Quagga processes.
```

```
/etc/init.d/quagga stop
    Terminate the Quagga processes.
```

```
/etc/init.d/quagga restart
    Stop and restart the Quagga processes.
```

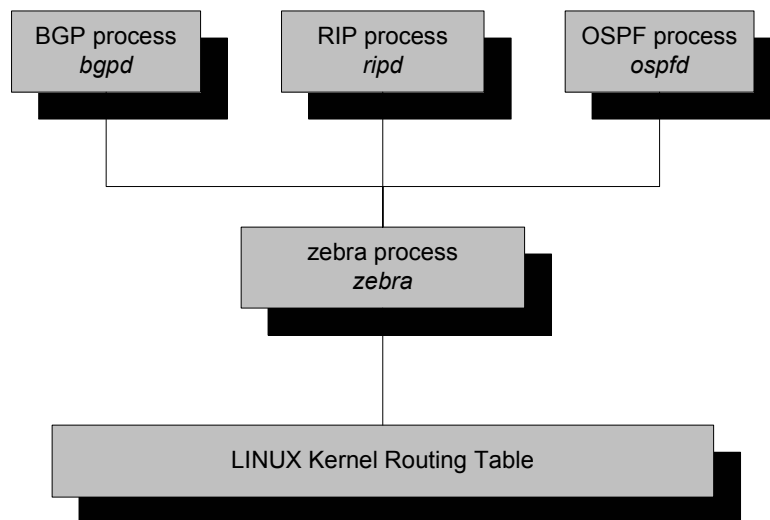


Figure 4.2: Quagga processes

To set up a routing process, you must enable the routing daemon in the Quagga configuration file `/etc/quagga/daemons` and then start the quagga service. For example to start the RIP routing protocol daemon, your `daemons` file should look as shown below. Afterwards, you can start the zebra and the ripd daemons by running `/etc/init.d/quagga start` or `/etc/init.d/quagga restart` in case Quagga was already running.

```

zebra=yes
bgpd=no
ospfd=no
ospf6d=no
ripd=yes
ripngd=no
isisd=no

```

Make sure the zebra daemon is always enabled as the other routing daemons depend on this process. When you type `/etc/init.d/quagga stop`, then all routing protocol processes are stopped as well.

For the zebra process and all other routing processes, there is a configuration file which is read when the process is started. The configuration files are located in the directory `/usr/local/etc` or `/etc/quagga`, and have names `zebra.conf`, `ripd.conf`, etc. The configuration files look similar to the configuration files of IOS, and contain commands that are executed when the process is started.

(c) Configuring the zebra process and the routing protocol processes

After starting the zebra process or any of the routing protocol processes, you can configure each process by establishing a Telnet session to that process. Each process listens on a specific port for incoming requests to establish a Telnet session. The port numbers of the processes are as follows:

- 2601 - Zebra
- 2602 - ripd
- 2604 - ospfd

If you establish a Telnet session to a routing process, you are asked for a password. If the password is correct, a command prompt is displayed. For example, to access the ripd process on the local host you type:

```
| PC1% telnet localhost 2602
```

This results in the following output.

```
| Trying 127.0.0.1...
| Connected to localhost.
| Escape character is '^]'.
|
| Hello, this is Quagga (version 0.99.20.1).
| Copyright 1996-2005 Kunihiro Ishiguro, et al.
|
| User Access Verification
|
| Password: <enter password>
| ripd>
```

At the prompt, you may type configuration commands. The Telnet session is terminated with the command

```
| ripd> exit
```

(d) Typing configuration commands

Once you have established a Telnet session to a routing process, you can configure the routing protocol of that process. The command line interface of the routing processes emulates the IOS command line interface, that is, the processes have similar command modes as IOS, and the syntax of commands is generally the same as the corresponding commands in IOS. For example, the following commands configure the RIP routing protocol for network 10.0.0.0/8 on a Linux PC.

```
| ripd> enable
| ripd# configure terminal
| ripd(config)# router rip
| ripd(config-router)# version 2
| ripd(config-router)# network 10.0.0.0/8
| ripd(config-router)# end
| ripd# exit
```

The password and enable password for all Quagga daemons (ripd and ospfd) is set to 'mvkbfj1n'.

After this brief tutorial, you can now complete the configuration of RIP on the Linux PCs.

Exercise 2. Configuring RIP on Linux PCs with Quagga

Enable RIP on all Linux PCs. Since all Linux PCs are running as hosts, RIP is set to passive mode, where the PCs receive and process incoming RIP packets, but do not transmit RIP packets. The following guidelines describe the configuration of PC1. Repeat the steps on each PC.

1. On PC1, start the zebra and theripd daemons by typing

```
| PC1% /etc/init.d/quagga start
```

Make sure your daemons configuration file is correctly configured.

2. To configure the RIP routing process on PC1, connect to the `ripd` process via Telnet.

```
| PC1% telnet localhost 2602
```

The system will prompt you for a login password. The password should be the same password as the login password on the Cisco routers.

3. The Linux PCs, which are configured as hosts, will be set to run RIP in passive mode. The commands to enable RIP in passive mode are as follows:

```
| ripd> enable
| ripd# configure terminal
| ripd(config)# router rip
| ripd(config-router)# version 2
| ripd(config-router)# network 10.0.0.0/8
| ripd(config-router)# passive-interface eth0
| ripd(config-router)# end
| ripd# show ip rip
```

The `show ip rip` displays the routing database of the RIP protocol. This command does not exist in IOS. It may take a few minutes until RIP has built up its routing database. When the routing table has stabilized, that is, the results of the command `show ip rip` do not change after subsequent rounds of update messages, save the output of the command, and exit the Telnet session with the command.

```
| ripd# exit
```

4. On PC1, view the routing table with the command

```
| PC1% netstat -rn
```

and save the output to a file. Compare the output of `netstat -rn` to the output of `show ip rip`. Note the cost metric for each entry.

5. Repeat Steps 1-5 for the other three Linux PCs.
6. Once you can successfully issue a ping from each Linux PCs to every other Linux PC, display the route from PC1 to PC4 (10.0.4.10) with the `traceroute` command and save the result to a file:

```
| PC1% traceroute 10.0.4.10
```

7. Start to capture traffic with Wireshark on all four Linux PCs. Set a capture filter or display filter to display only RIP packets.
8. Stop the traffic Wireshark capture on the PCs and save the traces for your report to a pcap file. Save the content of those RIP messages, needed to answer the questions in Part 8 (Select the Print details option).

Question 2.1)

Use the captured data of a single RIP packet and explain the fields in a RIP message.

[From frame 4 in /Lab 4/traces/2-8.PC2.out:](#)

```

1 Routing Information Protocol
  Command: Response (2)
3   Version: RIPv2 (2)
  IP Address: 10.0.3.0, Metric: 1
5     Address Family: IP (2)
     Route Tag: 0
7     IP Address: 10.0.3.0 (10.0.3.0)
     Netmask: 255.255.255.0 (255.255.255.0)
9     Next Hop: 0.0.0.0 (0.0.0.0)
     Metric: 1
11    IP Address: 10.0.4.0, Metric: 2
     Address Family: IP (2)
13    Route Tag: 0
     IP Address: 10.0.4.0 (10.0.4.0)
15    Netmask: 255.255.255.0 (255.255.255.0)
     Next Hop: 0.0.0.0 (0.0.0.0)
17    Metric: 2

```

We notice here that in this packet there is information for two entries in the routing table.

Explanations:

```

1 Routing Information Protocol
  Command: RIP command (request or response)
3   Version: RIP version
  IP Address: IP address of a host to update the routing table, Metric: amount of
  internetwork hops to go through to get to the destination
5     Address Family: the used address family. RIP can carry routing information
     for several different protocols (IP in this case).
7     Route Tag: used to distinguish between internal and external routes
     IP Address: the IP address for the table entry
     Netmask: subnet mask for the table entry
9     Next Hop: IP address of the next hop to which packets for the entry should
     be forwarded
     Metric: amount of internetwork hops to go through to get to the destination

```

Question 2.2)

For PC1, include the output of the commands `show ip rip` and `netstat -rn` from Steps 4 and 5. Discuss the differences in the output of the commands.

Step 4. Compare the output of "netstat -rn" to the output of "show ip rip".

PC1:

`show ip rip:`

```

Codes: R – RIP, C – connected, S – Static, O – OSPF, B – BGP
2 Sub-codes:
   (n) – normal, (s) – static, (d) – default, (r) – redistribute,
4   (i) – interface

6   Network          Next Hop          Metric From          Tag Time
C(i) 10.0.1.0/24      0.0.0.0           1 self            0
8 R(n) 10.0.2.0/24    10.0.1.1          2 10.0.1.1         0 02:46
R(n) 10.0.3.0/24    10.0.1.1          3 10.0.1.1         0 02:46
10 R(n) 10.0.4.0/24    10.0.1.1          4 10.0.1.1         0 02:46

```

`netstat -rn:`

```

2 Kernel IP routing table
  Destination      Gateway            Genmask           Flags   MSS Window  irtt  Iface

```


4	10.0.1.0	0.0.0.0	255.255.255.0	U	0 0	0 eth0
	10.0.2.0	10.0.1.1	255.255.255.0	UG	0 0	0 eth0
	10.0.3.0	10.0.1.1	255.255.255.0	UG	0 0	0 eth0
6	10.0.4.0	10.0.1.1	255.255.255.0	UG	0 0	0 eth0

We see that “show ip rip” shows more information related to RIP, while “netstat -rn” provides a general overview of the routing table. Information specific to RIP, such as Metric, From, Tag, Time, sub-codes, is not shown in “netstat -rn”.

Step 5. Repeat Steps 1-5 for the other three Linux PCs.

PC2:

show ip rip:

	Codes: R – RIP, C – connected, S – Static, O – OSPF, B – BGP					
2	Sub-codes:					
	(n) – normal, (s) – static, (d) – default, (r) – redistribute,					
4	(i) – interface					
	Network	Next Hop	Metric	From	Tag	Time
6	R(n) 10.0.1.0/24	10.0.2.1	2	10.0.2.1	0	02:37
8	C(i) 10.0.2.0/24	0.0.0.0	1	self	0	
	R(n) 10.0.3.0/24	10.0.2.2	2	10.0.2.2	0	03:00
10	R(n) 10.0.4.0/24	10.0.2.2	3	10.0.2.2	0	03:00

netstat -rn:

	Kernel IP routing table						
2	Destination	Gateway	Genmask	Flags	MSS Window	irtt	Iface
	10.0.1.0	10.0.2.1	255.255.255.0	UG	0 0	0	eth0
4	10.0.2.0	0.0.0.0	255.255.255.0	U	0 0	0	eth0
	10.0.3.0	10.0.2.2	255.255.255.0	UG	0 0	0	eth0
6	10.0.4.0	10.0.2.2	255.255.255.0	UG	0 0	0	eth0

PC3:

show ip rip:

	Codes: R – RIP, C – connected, S – Static, O – OSPF, B – BGP					
2	Sub-codes:					
	(n) – normal, (s) – static, (d) – default, (r) – redistribute,					
4	(i) – interface					
	Network	Next Hop	Metric	From	Tag	Time
6	R(n) 10.0.1.0/24	10.0.3.2	3	10.0.3.2	0	02:41
8	R(n) 10.0.2.0/24	10.0.3.2	2	10.0.3.2	0	02:41
	C(i) 10.0.3.0/24	0.0.0.0	1	self	0	
10	R(n) 10.0.4.0/24	10.0.3.3	2	10.0.3.3	0	02:40

netstat -rn:

	Kernel IP routing table						
2	Destination	Gateway	Genmask	Flags	MSS Window	irtt	Iface
	10.0.1.0	10.0.3.2	255.255.255.0	UG	0 0	0	eth0
4	10.0.2.0	10.0.3.2	255.255.255.0	UG	0 0	0	eth0
	10.0.3.0	0.0.0.0	255.255.255.0	U	0 0	0	eth0
6	10.0.4.0	10.0.3.3	255.255.255.0	UG	0 0	0	eth0

PC4:

show ip rip:

** missing **

netstat -rn:

1 ** missing **

Question 2.3)

Include the output of traceroute from Step 7.

```

1 student@lab2pc1:~$ traceroute 10.0.4.10
  traceroute to 10.0.4.10 (10.0.4.10), 30 hops max, 60 byte packets
3  1  10.0.1.1 (10.0.1.1)  2.078 ms  2.563 ms  2.944 ms
  2  10.0.2.2 (10.0.2.2)  2.941 ms  4.512 ms  5.326 ms
5  3  10.0.3.3 (10.0.3.3)  3.990 ms  4.817 ms  5.311 ms
  4  10.0.4.10 (10.0.4.10)  3.432 ms  3.671 ms  3.678 ms

```

Question 2.4.a)

What is the destination IP address of RIP packets?

We notice that in each "Lab 4/traces/2-8.PC*.pcap" file, there is a RIPv2 Request from a PC to destination 224.0.0.9, followed by a RIPv2 Response from each router directly connected to the same PC with destination the IP address of that PC.

Afterwards, all destinations for RIPv2 packets have destination 224.0.0.9

Question 2.4.b)

Do routers forward RIP packets? In other words, does PC1 receive RIP packets sent by Router3?

No, we see that in "Lab 4/traces/2-8.PC*.pcap" each PC only gets RIP packets from routers they are directly connected to.

Question 2.4.c)

Which types of routing RIP messages do you observe? The type of a RIP message is indicated by the value of the field command. For each packet type that you observed, explain the role that this message type plays in the RIP protocol.

We observed Request and Response messages.

Request: A RIP request packet is used to find routing information. A Request message sent by a node will trigger the sending of Response messages to the node by its neighbours. This message is usually sent on initialization of such a node.

Response: A RIP response packet contains routing information. Nodes which receive these packets can update their routing table if possible. Response messages can carry a whole routing table, or only entries queried for by a preceding Request message.

After a request message has been sent, response messages will be gratuitously sent when an update timer expires.

Question 2.4.d)

A RIP message may contain multiple routing table entries. How many bytes are consumed in a RIP message for each routing table entry? Which information is transmitted for each message?

20 bytes are consumed per routing table entry.

The information that is sent: IP Address, Metric, Address Family, Route Tag, IP Address, Netmask, Next Hop, Metric

Part 3. Reconfiguring the topology in RIP

In Part 3, you add Router4 to the network topology of Figure 4.1. The configuration of the network with Router4 is illustrated in Figure 4.3. The IP configuration of Router4 is given in Table 4.3. The purpose of this exercise is to explore how RIP detects changes to the network topology, and how long it takes until RIP updates the routing tables.

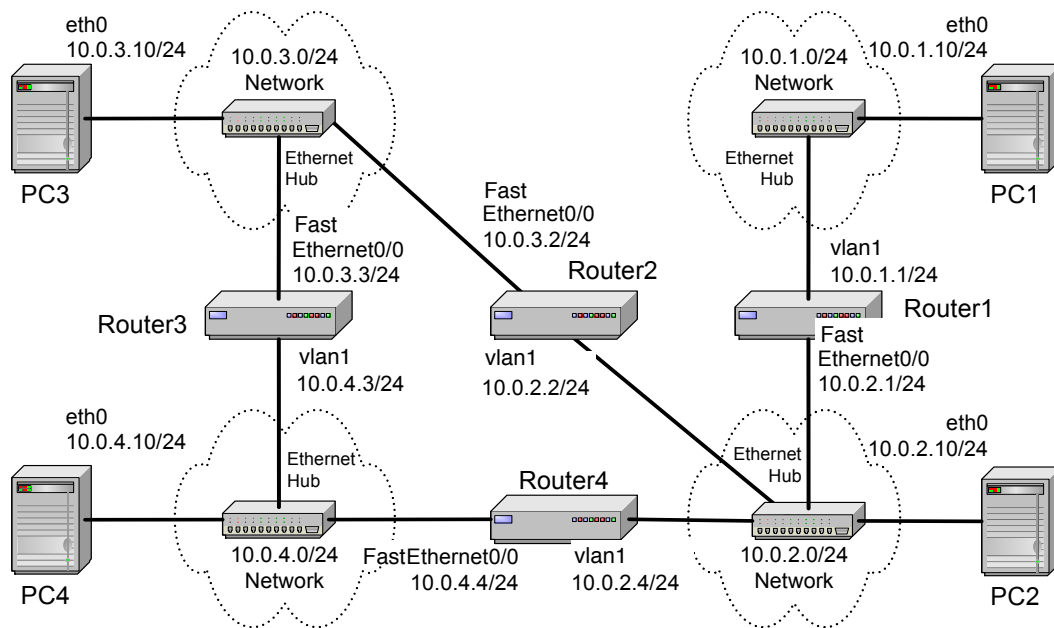


Figure 4.3: Network configuration for Part 3.

Cisco Router	FastEthernet0/0	vlan1
Router4	10.0.4.4/24	10.0.2.4/24

Table 4.3: IP addresses of Router4

Exercise 3-A. Updating the routing tables

Add Router4 to the network and observe the routing table updates made by RIP to reflect the new topology.

1. Continue with the network configuration of Part 2. RIP must be enabled on all Routers shown in Figure 4.1, and a RIP process must be running (in passive mode) on all Linux PCs.
2. Before attaching Router4, save the routing tables on all four Linux PCs with the command `netstat -rn`.
3. Connect Router4 as shown in Figure 4.3 and assign the IP addresses to the interfaces as shown in Table 4.3.
4. Configure Router4 to run RIP, following the same steps as in Part 1.

- Use the command `netstat -rn` on the Linux PCs to observe how the routing tables are updated. Once the routing tables on the PCs have converged, save the routing tables on all four Linux PCs.

Question 3.A)

Include the routing tables of the Linux PCs before the topology was changed (Step 2) and after Router4 has been added and the routing tables have been updated (Step 5). Discuss the time it took to update the routing tables.

It took a couple of seconds for the routing tables to update. This happened quickly because Router4 sends a Request message when it connects and RIP is enabled.

PC1:

before:

```
student@lab2pc1:~$ netstat -rn
```

2	Kernel IP routing table							
	Destination	Gateway	Genmask	Flags	MSS	Window	irrtt	Iface
4	10.0.1.0	0.0.0.0	255.255.255.0	U	0	0	0	eth0
	10.0.2.0	10.0.1.1	255.255.255.0	UG	0	0	0	eth0
6	10.0.3.0	10.0.1.1	255.255.255.0	UG	0	0	0	eth0
	10.0.4.0	10.0.1.1	255.255.255.0	UG	0	0	0	eth0

after:

```
student@lab2pc1:~$ netstat -rn
```

1	Kernel IP routing table							
	Destination	Gateway	Genmask	Flags	MSS	Window	irrtt	Iface
3	10.0.1.0	0.0.0.0	255.255.255.0	U	0	0	0	eth0
5	10.0.2.0	10.0.1.1	255.255.255.0	UG	0	0	0	eth0
	10.0.3.0	10.0.1.1	255.255.255.0	UG	0	0	0	eth0
7	10.0.4.0	10.0.1.1	255.255.255.0	UG	0	0	0	eth0

PC2:

before:

```
student@lab2pc1:~$ netstat -rn
```

1	Kernel IP routing table							
	Destination	Gateway	Genmask	Flags	MSS	Window	irrtt	Iface
3	10.0.1.0	10.0.2.1	255.255.255.0	UG	0	0	0	eth0
5	10.0.2.0	0.0.0.0	255.255.255.0	U	0	0	0	eth0
	10.0.3.0	10.0.2.2	255.255.255.0	UG	0	0	0	eth0
7	10.0.4.0	10.0.2.2	255.255.255.0	UG	0	0	0	eth0

after:

```
student@lab2pc1:~$ netstat -rn
```

1	Kernel IP routing table							
	Destination	Gateway	Genmask	Flags	MSS	Window	irrtt	Iface
3	10.0.1.0	10.0.2.1	255.255.255.0	UG	0	0	0	eth0
5	10.0.2.0	0.0.0.0	255.255.255.0	U	0	0	0	eth0
	10.0.3.0	10.0.2.2	255.255.255.0	UG	0	0	0	eth0
7	10.0.4.0	10.0.2.4	255.255.255.0	UG	0	0	0	eth0

PC3:

before:

```
1 ** missing **
```

after:

```
1 ** missing **
```

PC4:

before:

```
1 student@lab2pc1:~$ netstat -rn
Kernel IP routing table
3 Destination      Gateway         Genmask         Flags       MSS  Window  irtt  Iface
5 10.0.1.0          10.0.4.3        255.255.255.0   UG          0    0        0     eth0
7 10.0.2.0          10.0.4.3        255.255.255.0   UG          0    0        0     eth0
  10.0.3.0          10.0.4.3        255.255.255.0   UG          0    0        0     eth0
  10.0.4.0          0.0.0.0         255.255.255.0   U           0    0        0     eth0
```

after:

```
1 student@lab2pc1:~$ netstat -rn
Kernel IP routing table
3 Destination      Gateway         Genmask         Flags       MSS  Window  irtt  Iface
5 10.0.1.0          10.0.4.4        255.255.255.0   UG          0    0        0     eth0
7 10.0.2.0          10.0.4.4        255.255.255.0   UG          0    0        0     eth0
  10.0.3.0          10.0.4.3        255.255.255.0   UG          0    0        0     eth0
  10.0.4.0          0.0.0.0         255.255.255.0   U           0    0        0     eth0
```

Exercise 3-B. Convergence of RIP after a link failure

Next you disconnect the Ethernet cable of interface Ethernet0/0 on Router4 and observe how much time RIP takes to update the routing table of the Linux PCs to reflect the new topology.

1. Issue a ping command from PC4 to PC1. Do not terminate the ping command until this exercise is completed in Step 4.

```
| PC4% ping 10.0.1.10
```

2. Disconnect the Ethernet cable connected to interface *FastEthernet0/0* on Router4. Now, the output of ping on PC4 should show that the destination network is unreachable.
3. Wait until the ping command is successful again, that is, ICMP Echo Reply messages arrive at PC4. This occurs once an alternate path has been found between PC4 and PC1, and the routing tables have been updated accordingly. This may take several minutes.
4. Stop the ping command with `Ctrl-c` and save the ping statistics output (i.e. the data that appears at the bottom of the terminal screen when you stop the ping process).
5. Count the number of lost packets and calculate the time it took RIP to update the routing tables. (The ping command issues an ICMP Echo Request message approximately once every second.)

Question 3.B)

Include your answer on the convergence time from Step 4. Count the number of lost packets and calculate the time it took RIP to update the routing tables. (The ping command issues an ICMP Echo Request message approximately once every second.)

```
1 — 10.0.1.10 ping statistics —
3 189 packets transmitted, 23 received, +126 errors, 87% packet loss, time 188036ms
   rtt min/avg/max/mdev = 1.707/2.136/3.152/0.396 ms, pipe 4
```

With an 'inter-ping' time of 1 second, and 126 errors, we come to an update time of approximately 2 minutes.

Part 4. Configuring Open Shortest Path First (OSPF)

Next, you explore the routing protocol Open Shortest Path First (OSPF). OSPF is a link state routing protocol, where each router sends information on the cost metric of its network interfaces to all other routers in the network. The information about the interfaces is sent in messages that are called link state advertisements (LSAs). LSAs are disseminated using flooding, that is, a router sends its LSAs to all its neighbours, which, in turn, forward the LSAs to their neighbours, and so on. However, each LSA is forwarded only once. Each router maintains a link state database of all received LSAs, which provides the router with complete information about the topology of the network. Routers use their link state databases to run a shortest path algorithm that computes the shortest paths in the network.

Unlike distance vector routing protocols, link state routing protocols do not have convergence problems, such as the count-to-infinity problem. This is seen as a significant advantage of link state protocols over distance vector protocols.

OSPF is the most important link state routing protocol on the Internet. The functionality of OSPF is rich, and the lab exercises highlight only a small portion of the OSPF protocol. The Internet Lab uses OSPF version 2 (OSPFv2). The network configuration is shown in Figure 4.4 and Table 4.4. Note that some Linux PCs and routers are connected with crossover cables.

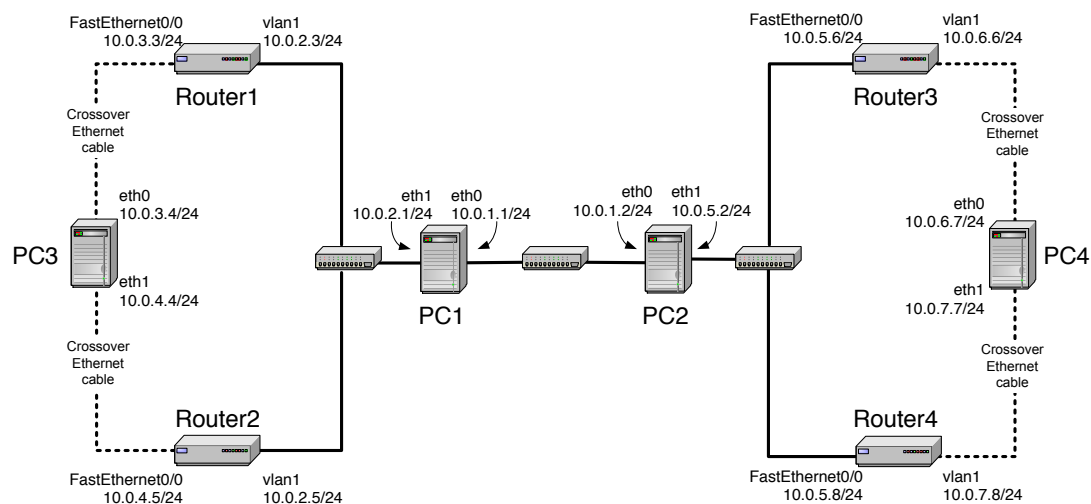


Figure 4.4: Network configuration for Part 4.

Linux PC	eth0	eth1
PC1	10.0.1.1/24	10.0.2.1/24
PC2	10.0.1.2/24	10.0.5.2/24
PC3	10.0.3.4/24	10.0.4.4/24
PC4	10.0.6.7/24	10.0.7.7/24
Cisco Router	FastEthernet0/0	vlan1
Router1	10.0.3.3/24	10.0.2.3/24
Router2	10.0.4.5/24	10.0.2.5/24
Router3	10.0.5.6/24	10.0.6.6/24
Router4	10.0.5.8/24	10.0.7.8/24

Table 4.4: IP addresses for Part 5

Exercise 4-A. Configuring OSPF on Cisco routers

Here, you configure OSPF on the Cisco routers. Below we give a brief description of the basic IOS commands used to configure OSPF on a Cisco router. As usual, each command must be issued in a particular IOS command mode.

1. Connect the routers as shown in Figure 4.4. Some of the interfaces are connected with crossover cables or with hubs in between them.
2. Configure the Cisco routers to run OSPF. The following set of commands are used to configure Router1.

```
Router1> enable
Password: <enable secret>
Router1# configure terminal
Router1(config)# no ip routing
Router1(config)# ip routing
Router1(config)# no router rip
Router1(config)# router ospf 1
Router1(config-router)# network 10.0.0.0 0.255.255.255 area 1
Router1(config-router)# interface FastEthernet0/0
Router1(config-if)# ip address 10.0.3.3 255.255.255.0
Router1(config-if)# interface vlan1
Router1(config-if)# ip address 10.0.2.3 255.255.255.0
Router1(config-if)# end
Router1# clear ip route *
```

The above commands disable RIP, enable OSPF for Area 1 and network 10.0.0.0/8, and configure the IP addresses of the routers. Since no router-id is specified, the highest IP address of Router1, 10.0.3.3, is used as the router-id. The router-id can be verified by issuing the command `show ip ospf`.

3. Repeat the configuration on the other routers. Refer to Figure 4.4 for the connections, and to Table 4.4 for the IP addresses.

Exercise 4-B. Configuring OSPF on Linux PCs

On the Linux PCs, OSPF is configured using the Quagga package. The syntax of the Quagga commands is essentially identical to the corresponding IOS commands. All PCs are set up as IP routers. The following describes the configuration of PC1.

1. Connect PC1 as shown in Figure 4.4.
2. Enable IP forwarding on PC1 by typing

```
PC1% echo "1" > /proc/sys/net/ipv4/ip_forward
```

3. Terminate the existing `ripd` process and disable the `ripd` daemon in the `daemons` configuration file:

```
PC1% /etc/init.d/quagga stop
```

4. Disable the `ripd` and enable the `ospfd` daemon in the `daemons` configuration file:

```
zebra=yes
bgpd=no
ospfd=yes
ospf6d=no
ripd=no
ripngd=no
isisd=no
```

5. Restart Quagga

```
PC1% /etc/init.d/quagga start
```

6. Set the OSPF configuration on PC1. Note that the commands for configuring OSPF in Quagga are very similar to the IOS commands:

```
PC1% telnet localhost 2604 Password: <login password>
ospfd> enable
ospfd# configure terminal
ospfd(config)# router ospf
ospfd(config-router)# network 10.0.0.0/8 area 1
ospfd(config-router)# router-id 10.0.1.1
ospfd(config-router)# no passive-interface eth0
ospfd(config-router)# no passive-interface eth1
ospfd(config-router)# end
ospfd# exit
```

Note that the command to enable OSPF (`router ospf`) does not use a process-id. Also, there is an explicit command to set the router-id. The latter is necessary since Quagga does not assign a default value for the router-id. In Quagga, the router-id must be explicitly set. In this exercise we use the IP address of the Ethernet interface *eth0* as the router-id for the Linux PCs.

7. Repeat the OSPF configuration in Steps 1-6 for all other Linux PCs.
8. When the OSPF configuration is complete, all hosts and routers should be able to communicate with each other. You can test the network configuration by running `traceroute` and `ping` commands on a Linux PC (or `trace` and `ping` commands on a Cisco router). When you have verified that the network connection is correct, proceed with the next step.

Exercise 4-C. Observing Convergence of OSPF

In comparison to the distance vector protocol RIP, the link state routing protocol OSPF quickly adapts to changes in the network topology. In this exercise you observe the interactions of OSPF after a change to the network topology.

1. On PC1, start to capture traffic with Wireshark on interface *eth0*. Set a filter to only display OSPF packets.
2. From PC3, run a `traceroute` command to PC4

```
PC3% traceroute 10.0.7.7
```

Confirm from the output and Figure 4.4, whether the path from PC3 to PC4 includes Router 3 or Router4.

3. Issue a ping command from PC3 to PC4 (10.0.7.7). Do not terminate the ping command until this exercise is completed.

```
| PC3% ping 10.0.7.7
```

4. If the path from PC3 to IP address 10.0.7.7 from Step 2 included Router3, then disconnect the Ethernet cable of the *Ethernet0/1* interface of Router3. Otherwise, disconnect the Ethernet cable of the *Ethernet0/1* interface of Router4. When the Ethernet cable is disconnected, the ping command on PC3 will show that IP address 10.0.7.7 is not reachable.
5. Now, OSPF updates the routing tables. Use the Wireshark window on PC1 to observe the transmitted OSPF messages:

Question 4.C.1.a)

How quickly are OSPF messages sent after the cable is disconnected?

OSPF messages are sent within a few seconds of disconnecting the cable.

Question 4.C.1.b)

How many OSPF messages are sent?

3 OSPF messages are sent: LS Update, Hello Packet and LS Acknowledge

Question 4.C.1.c)

Which type of OSPF packet is used for flooding link state information?

LS (link state) Update packets (which carry link state advertisements) are used to flood link state information to the network.

Question 4.C.1.d)

Describe the flooding of LSAs to all routers.

LS Update packets are multicast by OSPF routers to 224.0.0.5, which contain link state advertisements (LSA). When a router receives an LSA, it forwards the LSA to all its neighbors except the source of the LSA. In order to prevent the flooding from continuing indefinitely, each LSA has a sequence number. If a router receives an LSA with a sequence number it has already received previously, it won't forward the LSA anymore.

Question 4.C.1.e)

Which type of encapsulation is used for OSPF packets (TCP, UDP or other)?

OSPF does not carry data via a transport protocol, it forms IP datagrams with protocol number 89 (OSPF IGP).

Question 4.C.1.f)

What is the destination address of OSPF packets?

The destination address of OSPF packets is 224.0.0.5.

6. Wait until the ping command is successful again, that is, ICMP Echo Reply messages arrive at PC3. This happens when the routing tables have been updated.
7. Stop the ping command with `Ctrl-c` and save the ping statistics output (i.e. the data that appears at the bottom of the terminal screen when you stop the ping process).

Question 4.C.2)

Include your answer on the convergence time from Step 7. Count the number of lost packets and calculate the time it took OSPF to update the routing tables. (The ping command issues an ICMP Echo Request message approximately once every second.)

```

1  — 10.0.7.7 ping statistics —
19 packets transmitted, 12 received, +6 errors, 36% packet loss, time 18035ms
3  rtt min/avg/max/mdev = 2.554/2.646/2.741/0.078 ms

```

Out of 19 transmitted request messages, 12 reply messages have been received in total. This means it took about 7 seconds for OSPF to update the routing tables.

8. Issue another `traceroute` command from PC3 to IP address 10.0.7.7. By now, the output should show the new route to PC4.
9. Save the link state database on all Cisco routers and on all Linux PCs, and verify that all routers indeed have the same link state database. On the Linux PCs, open a Telnet session to the `ospfd` process, and then type

```
ospfd# show ip ospf database router
```

On the Cisco routers, simply type

```
Router1# show ip ospf database
```

Save the output of the link state databases to a file.

Question 4.C.3)

Can you confirm that the link state databases are identical? Compare the output of the command `show ip ospf database` from the Cisco routers and the Linux PCs.

The output of the link state databases on the PCs can be found in the files “Lab 4/traces/4.C-9.PC*.out”. Comparing them to the output on the Cisco routers below, we see that the output on the PCs shows some more information per entry in the table. The output on the PCs shows flags, length and more information about the links that the “Link ID” entries are connected to.

We can confirm that all of the tables are exactly the same, except for the Age column: Router1

```

1  OSPF Router with ID (10.0.3.3) (Process ID 1)
3
3  Router Link States (Area 1)
5  Link ID      ADV Router    Age          Seq#          Checksum Link count
7  10.0.1.1      10.0.1.1      497          0x80000008  0x0030AC  2
7  10.0.1.2      10.0.1.2      325          0x80000008  0x0015BA  2
7  10.0.3.3      10.0.3.3      88           0x8000000B  0x00EB9D  3
9  10.0.3.4      10.0.3.4      84           0x8000000C  0x0015A7  2
9  10.0.4.5      10.0.4.5      115          0x80000003  0x00793B  2
11 10.0.6.6      10.0.6.6      347          0x80000008  0x002870  2
11 10.0.6.7      10.0.6.7      1503         0x8000000C  0x007146  2
13 10.0.7.8      10.0.7.8      1534         0x80000009  0x00CFFC  1
15
15 Net Link States (Area 1)
17 Link ID      ADV Router    Age          Seq#          Checksum
17 10.0.1.2      10.0.1.2      2163         0x80000001  0x0063C3
19 10.0.2.3      10.0.3.3      298          0x80000005  0x00A53E
19 10.0.3.3      10.0.3.3      118          0x80000001  0x00B641
21 10.0.3.4      10.0.3.4      85           0x80000001  0x007B9B
21 10.0.4.5      10.0.4.5      60           0x80000003  0x00905D
23 10.0.5.6      10.0.6.6      842          0x80000005  0x00EFDA
23 10.0.6.7      10.0.6.7      2566         0x80000001  0x009F5F

```

Router2

OSPF Router with ID (10.0.4.5) (Process ID 1)					
Router Link States (Area 1)					
Link ID	ADV Router	Age	Seq#	Checksum	Link count
10.0.1.1	10.0.1.1	461	0x80000008	0x0030AC	2
10.0.1.2	10.0.1.2	289	0x80000008	0x0015BA	2
10.0.3.3	10.0.3.3	54	0x8000000B	0x00EB9D	3
10.0.3.4	10.0.3.4	49	0x8000000C	0x0015A7	2
10.0.4.5	10.0.4.5	79	0x80000003	0x00793B	2
10.0.6.6	10.0.6.6	312	0x80000008	0x002870	2
10.0.6.7	10.0.6.7	1468	0x8000000C	0x007146	2
10.0.7.8	10.0.7.8	1499	0x80000009	0x00CFFC	1
Net Link States (Area 1)					
Link ID	ADV Router	Age	Seq#	Checksum	
10.0.1.2	10.0.1.2	2128	0x80000001	0x0063C3	
10.0.2.3	10.0.3.3	264	0x80000005	0x00A53E	
10.0.3.3	10.0.3.3	84	0x80000001	0x00B641	
10.0.3.4	10.0.3.4	49	0x80000001	0x007B9B	
10.0.4.5	10.0.4.5	24	0x80000003	0x00905D	
10.0.5.6	10.0.6.6	807	0x80000005	0x00EFDA	
10.0.6.7	10.0.6.7	2532	0x80000001	0x009F5F	

Router3

OSPF Router with ID (10.0.6.6) (Process ID 1)					
Router Link States (Area 1)					
Link ID	ADV Router	Age	Seq#	Checksum	Link count
10.0.1.1	10.0.1.1	439	0x80000008	0x0030AC	2
10.0.1.2	10.0.1.2	265	0x80000008	0x0015BA	2
10.0.3.3	10.0.3.3	32	0x8000000B	0x00EB9D	3
10.0.3.4	10.0.3.4	28	0x8000000C	0x0015A7	2
10.0.4.5	10.0.4.5	58	0x80000003	0x00793B	2
10.0.6.6	10.0.6.6	285	0x80000008	0x002870	2
10.0.6.7	10.0.6.7	1441	0x8000000C	0x007146	2
10.0.7.8	10.0.7.8	1473	0x80000009	0x00CFFC	1
Net Link States (Area 1)					
Link ID	ADV Router	Age	Seq#	Checksum	
10.0.1.2	10.0.1.2	2103	0x80000001	0x0063C3	
10.0.2.3	10.0.3.3	242	0x80000005	0x00A53E	
10.0.3.3	10.0.3.3	62	0x80000001	0x00B641	
10.0.3.4	10.0.3.4	29	0x80000001	0x007B9B	
10.0.4.5	10.0.4.5	3	0x80000003	0x00905D	
10.0.5.6	10.0.6.6	780	0x80000005	0x00EFDA	
10.0.6.7	10.0.6.7	2504	0x80000001	0x009F5F	

Router4

OSPF Router with ID (10.0.7.8) (Process ID 1)					
Router Link States (Area 1)					
Link ID	ADV Router	Age	Seq#	Checksum	Link count
10.0.1.1	10.0.1.1	448	0x80000008	0x0030AC	2
10.0.1.2	10.0.1.2	274	0x80000008	0x0015BA	2
10.0.3.3	10.0.3.3	41	0x8000000B	0x00EB9D	3

	10.0.3.4	10.0.3.4	37	0x8000000C	0x0015A7	2
10	10.0.4.5	10.0.4.5	68	0x80000003	0x00793B	2
	10.0.6.6	10.0.6.6	296	0x80000008	0x002870	2
12	10.0.6.7	10.0.6.7	1452	0x8000000C	0x007146	2
	10.0.7.8	10.0.7.8	1481	0x80000009	0x00CFFC	1
14						
	Net Link States (Area 1)					
16						
	Link ID	ADV Router	Age	Seq#	Checksum	
18	10.0.1.2	10.0.1.2	2112	0x80000001	0x0063C3	
	10.0.2.3	10.0.3.3	252	0x80000005	0x00A53E	
20	10.0.3.3	10.0.3.3	71	0x80000001	0x00B641	
	10.0.3.4	10.0.3.4	38	0x80000001	0x007B9B	
22	10.0.4.5	10.0.4.5	13	0x80000003	0x00905D	
	10.0.5.6	10.0.6.6	790	0x80000005	0x00EFDA	
24	10.0.6.7	10.0.6.7	2514	0x80000001	0x009F5F	

10. Stop Wireshark on PC1, and save the different types of OSPF packets captured by Wireshark. Save one copy of each type of OSPF packet that you observed (Selecting the Print Detail option).

Question 4.C.4)

From your saved Wireshark output, include one packet from each of the different OSPF packet types that you have observed. (Include only one packet from each type!)

Hello Packet

No.	Time	Source	Destination	Protocol	Length
2	1.0000000	10.0.1.2	224.0.0.5	OSPF	82
	Hello Packet				
4	Frame 1: 82 bytes on wire (656 bits), 82 bytes captured (656 bits)				
	Encapsulation type: Ethernet (1)				
6	Arrival Time: Mar 11, 2016 14:44:39.623517000 CET				
	[Time shift for this packet: 0.000000000 seconds]				
8	Epoch Time: 1457703879.623517000 seconds				
	[Time delta from previous captured frame: 0.000000000 seconds]				
10	[Time delta from previous displayed frame: 0.000000000 seconds]				
	[Time since reference or first frame: 0.000000000 seconds]				
12	Frame Number: 1				
	Frame Length: 82 bytes (656 bits)				
14	Capture Length: 82 bytes (656 bits)				
	[Frame is marked: False]				
16	[Frame is ignored: False]				
	[Protocols in frame: eth:ip:ospf]				
18	[Coloring Rule Name: Routing]				
	[Coloring Rule String: hsrp eigrp ospf bgp cdp vrrp gvrp igmp ismp]				
20	Ethernet II, Src: IntelCor_36:31:f0 (68:05:ca:36:31:f0), Dst: IPv4mcast_00:00:05 (01:00:5e:00:00:05)				
	Destination: IPv4mcast_00:00:05 (01:00:5e:00:00:05)				
22	Address: IPv4mcast_00:00:05 (01:00:5e:00:00:05)				
0. = LG bit: Globally unique address (factory default)				
241. = IG bit: Group address (multicast/broadcast)				
	Source: IntelCor_36:31:f0 (68:05:ca:36:31:f0)				
26	Address: IntelCor_36:31:f0 (68:05:ca:36:31:f0)				
0. = LG bit: Globally unique address (factory default)				
280. = IG bit: Individual address (unicast)				
	Type: IP (0x0800)				

```

30 Internet Protocol Version 4, Src: 10.0.1.2 (10.0.1.2), Dst: 224.0.0.5 (224.0.0.5)
    Version: 4
32    Header length: 20 bytes
        Differentiated Services Field: 0xc0 (DSCP 0x30: Class Selector 6; ECN: 0x00:
            Not-ECT (Not ECN-Capable Transport))
34        1100 00.. = Differentiated Services Codepoint: Class Selector 6 (0x30)
            .... ..00 = Explicit Congestion Notification: Not-ECT (Not ECN-Capable
                Transport) (0x00)
36    Total Length: 68
        Identification: 0xc844 (51268)
38    Flags: 0x00
        0... .. = Reserved bit: Not set
40        .0.. .... = Don't fragment: Not set
        ..0. .... = More fragments: Not set
42    Fragment offset: 0
        Time to live: 1
44    Protocol: OSPF IGP (89)
        Header checksum: 0x0556 [validation disabled]
46        [Good: False]
        [Bad: False]
48    Source: 10.0.1.2 (10.0.1.2)
        Destination: 224.0.0.5 (224.0.0.5)
50    [Source GeoIP: Unknown]
        [Destination GeoIP: Unknown]
52 Open Shortest Path First
    OSPF Header
54        OSPF Version: 2
        Message Type: Hello Packet (1)
56        Packet Length: 48
        Source OSPF Router: 10.0.1.2 (10.0.1.2)
58        Area ID: 0.0.0.1
        Packet Checksum: 0xd093 [correct]
60        Auth Type: Null
        Auth Data (none)
62    OSPF Hello Packet
        Network Mask: 255.255.255.0
64        Hello Interval: 10 seconds
        Options: 0x02 (E)
66        0... .. = DN: DN-bit is NOT set
        .0.. .... = O: O-bit is NOT set
68        ..0. .... = DC: Demand Circuits are NOT supported
        ...0 .... = L: The packet does NOT contain LLS data block
70        .... 0... = NP: NSSA is NOT supported
        .... .0.. = MC: NOT Multicast Capable
72        .... ..1. = E: External Routing Capability
        .... ...0 = MT: NO Multi-Topology Routing
74        Router Priority: 1
        Router Dead Interval: 40 seconds
76        Designated Router: 10.0.1.2
        Backup Designated Router: 10.0.1.1
78        Active Neighbor: 10.0.1.1

```

LS Update

No.	Time	Source	Destination	Protocol	Length	
2	49 12.158173	10.0.1.2	224.0.0.5	OSPF	98	LS Update
4	Frame 49: 98 bytes on wire (784 bits), 98 bytes captured (784 bits)					
6	Encapsulation type: Ethernet (1)					
	Arrival Time: Mar 11, 2016 14:44:51.781690000 CET					
	[Time shift for this packet: 0.000000000 seconds]					
8	Epoch Time: 1457703891.781690000 seconds					
	[Time delta from previous captured frame: 0.388944000 seconds]					
10	[Time delta from previous displayed frame: 2.157656000 seconds]					

```

[Time since reference or first frame: 12.158173000 seconds]
12  Frame Number: 49
    Frame Length: 98 bytes (784 bits)
14  Capture Length: 98 bytes (784 bits)
    [Frame is marked: False]
16  [Frame is ignored: False]
    [Protocols in frame: eth:ip:ospf]
18  [Coloring Rule Name: OSPF State Change]
    [Coloring Rule String: ospf.msg != 1]
20  Ethernet II, Src: IntelCor_36:31:f0 (68:05:ca:36:31:f0), Dst: IPv4mcast_00:00:05
    (01:00:5e:00:00:05)
    Destination: IPv4mcast_00:00:05 (01:00:5e:00:00:05)
22  Address: IPv4mcast_00:00:05 (01:00:5e:00:00:05)
    .... 0. .... = LG bit: Globally unique address (factory
    default)
24  .... 1. .... = IG bit: Group address (multicast/broadcast)
    Source: IntelCor_36:31:f0 (68:05:ca:36:31:f0)
26  Address: IntelCor_36:31:f0 (68:05:ca:36:31:f0)
    .... 0. .... = LG bit: Globally unique address (factory
    default)
28  .... 0. .... = IG bit: Individual address (unicast)
    Type: IP (0x0800)
30  Internet Protocol Version 4, Src: 10.0.1.2 (10.0.1.2), Dst: 224.0.0.5 (224.0.0.5)
    Version: 4
32  Header length: 20 bytes
    Differentiated Services Field: 0xc0 (DSCP 0x30: Class Selector 6; ECN: 0x00:
    Not-ECT (Not ECN-Capable Transport))
34  1100 00.. = Differentiated Services Codepoint: Class Selector 6 (0x30)
    .... 00.. = Explicit Congestion Notification: Not-ECT (Not ECN-Capable
    Transport) (0x00)
36  Total Length: 84
    Identification: 0xc848 (51272)
38  Flags: 0x00
    0... .... = Reserved bit: Not set
40  .0... .... = Don't fragment: Not set
    ..0. .... = More fragments: Not set
42  Fragment offset: 0
    Time to live: 1
44  Protocol: OSPF IGP (89)
    Header checksum: 0x0542 [validation disabled]
46  [Good: False]
    [Bad: False]
48  Source: 10.0.1.2 (10.0.1.2)
    Destination: 224.0.0.5 (224.0.0.5)
50  [Source GeoIP: Unknown]
    [Destination GeoIP: Unknown]
52  Open Shortest Path First
    OSPF Header
54  OSPF Version: 2
    Message Type: LS Update (4)
56  Packet Length: 64
    Source OSPF Router: 10.0.1.2 (10.0.1.2)
58  Area ID: 0.0.0.1
    Packet Checksum: 0x3e6a [correct]
60  Auth Type: Null
    Auth Data (none)
62  LS Update Packet
    Number of LSAs: 1
64  LS Type: Router-LSA
    LS Age: 2 seconds
66  Do Not Age: False
    Options: 0x22 (DC, E)
68  0... .... = DN: DN-bit is NOT set
    .0... .... = O: O-bit is NOT set
70  ..1. .... = DC: Demand Circuits are supported
    ...0 .... = L: The packet does NOT contain LLS data block
72  .... 0... = NP: NSSA is NOT supported

```



```

74         .... ..0.. = MC: NOT Multicast Capable
76         .... ..1.. = E: External Routing Capability
78         .... ...0 = MT: NO Multi-Topology Routing
76     LS Type: Router-LSA (1)
78     Link State ID: 10.0.7.8
78     Advertising Router: 10.0.7.8 (10.0.7.8)
80     LS Sequence Number: 0x80000009
80     LS Checksum: 0xcffc
82     Length: 36
82     Flags: 0x00
84         .... ..0.. = V: NO Virtual link endpoint
84         .... ..0.. = E: NO AS boundary router
84         .... ...0 = B: NO Area border router
86     Number of Links: 1
88     Type: Transit ID: 10.0.5.6      Data: 10.0.5.8      Metric: 1
88     IP address of Designated Router: 10.0.5.6
90     Link Data: 10.0.5.8
90     Link Type: 2 - Connection to a transit network
92     Number of TOS metrics: 0
92     TOS 0 metric: 1

```

LS Acknowledge

No.	Time	Source	Destination	Protocol	Length	
2	51 12.654871	10.0.1.1	224.0.0.5	OSPF	78	LS Acknowledge
4	Frame 51: 78 bytes on wire (624 bits), 78 bytes captured (624 bits)					
6	Encapsulation type: Ethernet (1)					
6	Arrival Time: Mar 11, 2016 14:44:52.278388000 CET					
8	[Time shift for this packet: 0.000000000 seconds]					
8	Epoch Time: 1457703892.278388000 seconds					
10	[Time delta from previous captured frame: 0.435176000 seconds]					
10	[Time delta from previous displayed frame: 0.435176000 seconds]					
12	[Time since reference or first frame: 12.654871000 seconds]					
12	Frame Number: 51					
14	Frame Length: 78 bytes (624 bits)					
14	Capture Length: 78 bytes (624 bits)					
16	[Frame is marked: False]					
16	[Frame is ignored: False]					
18	[Protocols in frame: eth:ip:ospf]					
18	[Coloring Rule Name: OSPF State Change]					
18	[Coloring Rule String: ospf.msg != 1]					
20	Ethernet II, Src: IntelCor_36:33:a0 (68:05:ca:36:33:a0), Dst: IPv4mcast_00:00:05 (01:00:5e:00:00:05)					
22	Destination: IPv4mcast_00:00:05 (01:00:5e:00:00:05)					
22	Address: IPv4mcast_00:00:05 (01:00:5e:00:00:05)					
240. = LG bit: Globally unique address (factory default)					
241. = IG bit: Group address (multicast/broadcast)					
26	Source: IntelCor_36:33:a0 (68:05:ca:36:33:a0)					
26	Address: IntelCor_36:33:a0 (68:05:ca:36:33:a0)					
280. = LG bit: Globally unique address (factory default)					
280. = IG bit: Individual address (unicast)					
30	Type: IP (0x0800)					
30	Internet Protocol Version 4, Src: 10.0.1.1 (10.0.1.1), Dst: 224.0.0.5 (224.0.0.5)					
32	Version: 4					
32	Header length: 20 bytes					
34	Differentiated Services Field: 0xc0 (DSCP 0x30: Class Selector 6; ECN: 0x00: Not-ECT (Not ECN-Capable Transport))					
34	1100 00.. = Differentiated Services Codepoint: Class Selector 6 (0x30)					
3600 = Explicit Congestion Notification: Not-ECT (Not ECN-Capable Transport) (0x00)					
36	Total Length: 64					

```

38 Identification: 0xca01 (51713)
   Flags: 0x00
       0... .. = Reserved bit: Not set
40       .0... .. = Don't fragment: Not set
       ..0... .. = More fragments: Not set
42 Fragment offset: 0
   Time to live: 1
44 Protocol: OSPF IGP (89)
   Header checksum: 0x039e [validation disabled]
46   [Good: False]
   [Bad: False]
48 Source: 10.0.1.1 (10.0.1.1)
   Destination: 224.0.0.5 (224.0.0.5)
50   [Source GeolP: Unknown]
   [Destination GeolP: Unknown]
52 Open Shortest Path First
   OSPF Header
54   OSPF Version: 2
   Message Type: LS Acknowledge (5)
56   Packet Length: 44
   Source OSPF Router: 10.0.1.1 (10.0.1.1)
58   Area ID: 0.0.0.1
   Packet Checksum: 0x5e8f [correct]
60   Auth Type: Null
   Auth Data (none)
62 LSA Header
   LS Age: 2 seconds
64   Do Not Age: False
   Options: 0x22 (DC, E)
66       0... .. = DN: DN-bit is NOT set
       .0... .. = O: O-bit is NOT set
68       ..1... .. = DC: Demand Circuits are supported
       ...0... .. = L: The packet does NOT contain LLS data block
70       .... 0... = NP: NSSA is NOT supported
       .... .0... = MC: NOT Multicast Capable
72       .... ..1. = E: External Routing Capability
       .... ...0 = MT: NO Multi-Topology Routing
74   LS Type: Router-LSA (1)
   Link State ID: 10.0.7.8
76   Advertising Router: 10.0.7.8 (10.0.7.8)
   LS Sequence Number: 0x80000009
78   LS Checksum: 0xcffc
   Length: 36

```

Question 4.C.5)

Include the output of the link state database of PC2.

```

1 lab2pc1# show ip ospf database router
3
   OSPF Router with ID (10.0.1.2)
5
       Router Link States (Area 0.0.0.1)
7
   LS age: 507
9   Options: 0x2 : *|---|---|E|*
   LS Flags: 0x6
11  Flags: 0x0
   LS Type: router-LSA
13  Link State ID: 10.0.1.1
   Advertising Router: 10.0.1.1
15  LS Seq Number: 80000008
   Checksum: 0x30ac
17  Length: 48

```

```

19      Number of Links: 2
21      Link connected to: a Transit Network
21      (Link ID) Designated Router address: 10.0.1.2
23      (Link Data) Router Interface address: 10.0.1.1
23      Number of TOS metrics: 0
25      TOS 0 Metric: 10
27      Link connected to: a Transit Network
27      (Link ID) Designated Router address: 10.0.2.3
29      (Link Data) Router Interface address: 10.0.2.1
29      Number of TOS metrics: 0
31      TOS 0 Metric: 10
33      LS age: 333
35      Options: 0x2 : *|---|---|E|*
35      LS Flags: 0x3
37      Flags: 0x0
37      LS Type: router-LSA
39      Link State ID: 10.0.1.2
39      Advertising Router: 10.0.1.2
41      LS Seq Number: 80000008
41      Checksum: 0x15ba
43      Length: 48
43      Number of Links: 2
45      Link connected to: a Transit Network
47      (Link ID) Designated Router address: 10.0.1.2
47      (Link Data) Router Interface address: 10.0.1.2
49      Number of TOS metrics: 0
49      TOS 0 Metric: 10
51      Link connected to: a Transit Network
53      (Link ID) Designated Router address: 10.0.5.6
53      (Link Data) Router Interface address: 10.0.5.2
55      Number of TOS metrics: 0
55      TOS 0 Metric: 10
57      LS age: 101
59      Options: 0x22 : *|---|DC|---|E|*
59      LS Flags: 0x6
61      Flags: 0x0
63      LS Type: router-LSA
63      Link State ID: 10.0.3.3
65      Advertising Router: 10.0.3.3
65      LS Seq Number: 8000000b
67      Checksum: 0xeb9d
67      Length: 60
69      Number of Links: 3
71      Link connected to: a Transit Network
71      (Link ID) Designated Router address: 10.0.2.3
73      (Link Data) Router Interface address: 10.0.2.3
73      Number of TOS metrics: 0
75      TOS 0 Metric: 1
77      Link connected to: a Transit Network
77      (Link ID) Designated Router address: 10.0.3.3
79      (Link Data) Router Interface address: 10.0.3.3
79      Number of TOS metrics: 0
81      TOS 0 Metric: 1
83      Link connected to: a Transit Network
83      (Link ID) Designated Router address: 10.0.3.4
83      (Link Data) Router Interface address: 10.0.3.3

```

```

85      Number of TOS metrics: 0
      TOS 0 Metric: 1
87
89  LS age: 97
Options: 0x2 : *|---|---|E|*
91  LS Flags: 0x6
Flags: 0x0
93  LS Type: router-LSA
Link State ID: 10.0.3.4
95  Advertising Router: 10.0.3.4
LS Seq Number: 8000000c
97  Checksum: 0x15a7
Length: 48
99  Number of Links: 2

101  Link connected to: a Transit Network
      (Link ID) Designated Router address: 10.0.3.4
103  (Link Data) Router Interface address: 10.0.3.4
      Number of TOS metrics: 0
105  TOS 0 Metric: 10

107  Link connected to: a Transit Network
      (Link ID) Designated Router address: 10.0.4.5
109  (Link Data) Router Interface address: 10.0.4.4
      Number of TOS metrics: 0
111  TOS 0 Metric: 10

113
LS age: 127
115 Options: 0x22 : *|---|DC|---|E|*
LS Flags: 0x6
117 Flags: 0x0
LS Type: router-LSA
119 Link State ID: 10.0.4.5
Advertising Router: 10.0.4.5
121 LS Seq Number: 80000003
Checksum: 0x793b
123 Length: 48
      Number of Links: 2

125  Link connected to: a Transit Network
      (Link ID) Designated Router address: 10.0.2.3
127  (Link Data) Router Interface address: 10.0.2.5
      Number of TOS metrics: 0
129  TOS 0 Metric: 1

131  Link connected to: a Transit Network
      (Link ID) Designated Router address: 10.0.4.5
133  (Link Data) Router Interface address: 10.0.4.5
      Number of TOS metrics: 0
135  TOS 0 Metric: 1

137
LS age: 356
139 Options: 0x22 : *|---|DC|---|E|*
LS Flags: 0x6
141 Flags: 0x0
LS Type: router-LSA
143 Link State ID: 10.0.6.6
Advertising Router: 10.0.6.6
145 LS Seq Number: 80000008
Checksum: 0x2870
147 Length: 48
      Number of Links: 2

149  Link connected to: a Transit Network

```

```

153      (Link ID) Designated Router address: 10.0.6.7
      (Link Data) Router Interface address: 10.0.6.6
155      Number of TOS metrics: 0
      TOS 0 Metric: 1

157      Link connected to: a Transit Network
      (Link ID) Designated Router address: 10.0.5.6
159      (Link Data) Router Interface address: 10.0.5.6
      Number of TOS metrics: 0
161      TOS 0 Metric: 1

163
165      LS age: 1512
      Options: 0x2 : *|---|---|E|*
      LS Flags: 0x6
167      Flags: 0x0
      LS Type: router-LSA
169      Link State ID: 10.0.6.7
      Advertising Router: 10.0.6.7
171      LS Seq Number: 8000000c
      Checksum: 0x7146
173      Length: 48
      Number of Links: 2

175
      Link connected to: a Transit Network
177      (Link ID) Designated Router address: 10.0.6.7
      (Link Data) Router Interface address: 10.0.6.7
179      Number of TOS metrics: 0
      TOS 0 Metric: 10

181
      Link connected to: Stub Network
183      (Link ID) Net: 10.0.7.0
      (Link Data) Network Mask: 255.255.255.0
185      Number of TOS metrics: 0
      TOS 0 Metric: 10
187

189      LS age: 1542
      Options: 0x22 : *|---|DC|---|E|*
191      LS Flags: 0x6
      Flags: 0x0
193      LS Type: router-LSA
      Link State ID: 10.0.7.8
195      Advertising Router: 10.0.7.8
      LS Seq Number: 80000009
197      Checksum: 0xcffc
      Length: 36
199      Number of Links: 1

201
      Link connected to: a Transit Network
      (Link ID) Designated Router address: 10.0.5.6
203      (Link Data) Router Interface address: 10.0.5.8
      Number of TOS metrics: 0
205      TOS 0 Metric: 1

```

Question 4.C.6)

Pick a single link state advertisement packet captured by Wireshark, and describe how to interpret the information contained in the link state advertisement.

No.	Time	Source	Destination	Protocol	Length
1	0.000000	10.0.1.2	224.0.0.5	OSPF	82
		Info			
		Hello Packet			

```

3 |
5 | Frame 1: 82 bytes on wire (656 bits), 82 bytes captured (656 bits)
   | Ethernet II, Src: IntelCor_36:31:f0 (68:05:ca:36:31:f0), Dst: IPv4mcast_00:00:05
   |   (01:00:5e:00:00:05)
   | Internet Protocol Version 4, Src: 10.0.1.2 (10.0.1.2), Dst: 224.0.0.5 (224.0.0.5)
7 | Open Shortest Path First
   |   OSPF Header
9 |       OSPF Version: 2
   |       Message Type: Hello Packet (1)
11 |       Packet Length: 48
   |       Source OSPF Router: 10.0.1.2 (10.0.1.2)
13 |       Area ID: 0.0.0.1
   |       Packet Checksum: 0xd093 [correct]
15 |       Auth Type: Null
   |       Auth Data (none)
17 |   OSPF Hello Packet
   |       Network Mask: 255.255.255.0
19 |       Hello Interval: 10 seconds
   |       Options: 0x02 (E)
21 |       Router Priority: 1
   |       Router Dead Interval: 40 seconds
23 |       Designated Router: 10.0.1.2
   |       Backup Designated Router: 10.0.1.1
25 |       Active Neighbor: 10.0.1.1

```

The packet consists of an "OSPF Header part" and an "OSPF Hello Packet" part. The actual link state advertisement information can be found in the "OSPF Hello Packet" part:

Network Mask: the subnet mask of the advertising OSPF node

Hello Interval: the interval at which OSPF Hello Packets are sent

Options: extra information about the local advertising node's capabilities

Router Priority: the priority of the local node

Router Dead Interval: the death interval requested by the advertising node, describes how long to wait for hello packets before declaring the node dead

Designated Router: the ip address of the current designated router: the routers in a network select a designated router and a backup designated router which act as a hub to reduce traffic between routers.

Backup Designated Router: the ip address of the current backup designated router

Active Neighbor: the router IDs of the OSPF router from which an OSPF Hello Packet has been seen on the network

Part 5. Hierarchical Routing in OSPF

The concept of areas in OSPF can be used to construct a hierarchical routing scheme. When the network is partitioned into multiple areas, then routers must have complete topology information only about routers in the same area, and only limited information about other areas. All areas must be connected to Area 0, which is a special area, called the backbone area. This builds a two-level hierarchy: The backbone area is at the top of the hierarchy and the other areas are at the bottom of the hierarchy. Traffic between two areas is routed through the backbone area. Routers that connect to two areas are called area border routers.

The configuration in this part is shown in Figure 4.5. Here, the network from Part 4 is partitioned into three areas. The area in the middle is the backbone area (Area 0). The IP addresses are the same as in Part 4, and need not be modified. PC1 and PC2 are area border routers.

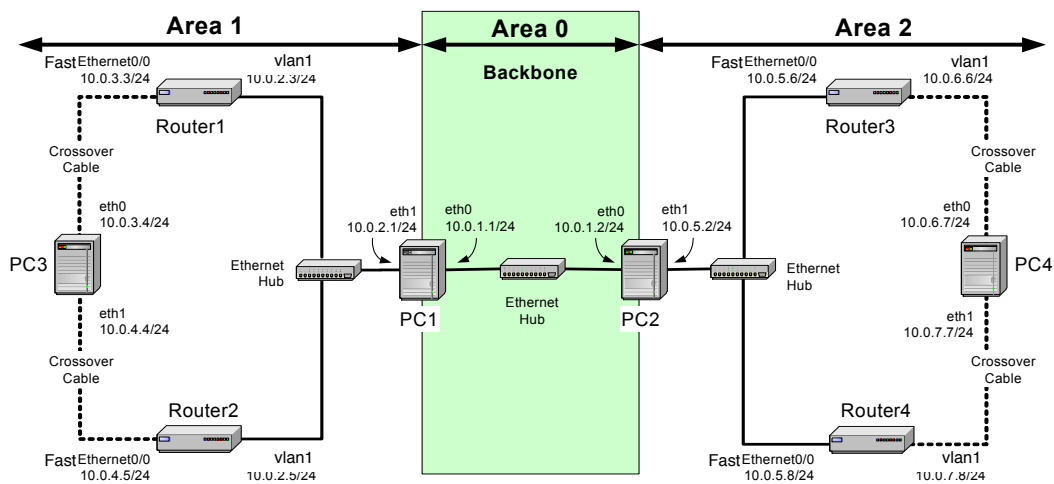


Figure 4.5: Network configuration for Part 5

In the following exercises you define the areas, and then observe how the link state databases are built.

Exercise 5. Defining multiple areas in OSPF

1. Restart the `zebra` and `ospfd` processes on all four Linux PCs. Use the same daemons configuration file as used in the previous exercise.

```
PC1% /etc/init.d/quagga restart
```

2. Start Wireshark on PC1 and capture traffic on interface `eth0`.
3. Change the Area IDs of the Cisco routers and the PCs. On each system, the directly connected networks are assigned to an area with a 24-bit prefix. Here are the configurations for PC3, PC1, and Router 1. The other configurations are similar. PC3, which belongs to only one area, is configured as follows:

```
PC3% telnet localhost 2604 Password: <login password>
ospfd> enable
```

```
ospfd# configure terminal
ospfd(config)# router ospf
ospfd(config-router)# router-id 10.0.3.4
ospfd(config-router)# network 10.0.3.0/24 area 1
ospfd(config-router)# network 10.0.4.0/24 area 1
ospfd(config-router)# end
ospfd# exit
```

PC1, belongs to two areas, and is configured as follows:

```
PC1% telnet localhost 2604 Password: <login password>
ospfd> enable
ospfd# configure terminal
ospfd(config)# router ospf
ospfd(config-router)# router-id 10.0.1.1
ospfd(config-router)# network 10.0.2.0/24 area 1
ospfd(config-router)# network 10.0.1.0/24 area 0
ospfd(config-router)# end
ospfd# exit
```

The configuration of Router 1 is as follows:

```
Router1# configure terminal
Router1(config)# no router ospf 1
Router1(config)# router ospf 1
Router1(config-router)# network 10.0.3.0 0.0.0.255 area 1
Router1(config-router)# network 10.0.2.0 0.0.0.255 area 1
Router1(config-router)# end
Router1# clear ip ospf 1 process
```

4. Once the routing tables have converged, test the network configuration with the commands `traceroute` and `ping` on the Linux PCs, and the commands `trace` and `ping` on the Cisco routers. All hosts and routers should be able to communicate with each other.
5. Save the link state database on all Cisco routers and on all Linux PCs. On the Linux PCs, open a Telnet session to the ospfd process, and then type

```
| ospfd# show ip ospf database router
```

On the Cisco routers, type

```
| Router1# show ip ospf database
```

Save the output of the link state databases to a file.

Question 5.1.a)

Refer to the saved link state databases in your answers. Compare the link state databases to those saved in Part 4. Which differences do you note?

We see that this the link state databases are not identical for all routers, but they are identical for routers in the same areas.

Routers 1 and 2 in Area 1 have identical link state databases. Analogous for Routers 3 and 4 in Area 2.

We also note that the area the routers belong to also is in the output of "show ip ospf database"

Question 5.1.b)

Which information do routers in Area 1 have about Area 2? Which information do they have about the backbone area (Area 0)?

***** ?????????????????????????????? *****

Routers in Area 1 have limited information about Area 2. They know that subnets 10.0.5.0/24, 10.0.6.0/24, 10.0.7.0/24 exist and that packets for those subnets must go through router 10.0.1.11.

The same goes for Area 0. Subnet 10.0.1.0/24 is known to exist and that's all.

Question 5.1.c)

How much information do the routers in the backbone area (Area 0) have about the topology of Area 1 and Area 2?

Together, the routers in Area 0 know everything about the topology of Areas 1 and 2. There is an entry for each advertising router in the database. That is, the output of "show ip ospf database router" on PCs 1 and 2 is the same as the output on any PC in part 4.

Question 5.1.d)

How do the IP routers in Area 1 know how to forward traffic to Area 2?

***** ?????????? *****

This can be found under "Summary Net Link States (Area 1)" in the output of "show ip ospf database". They know that subnets 10.0.5.0/24, 10.0.6.0/24, 10.0.7.0/24 exist and that packets for those subnets must go through router 10.0.1.11.

6. Display the area routers known to Router 1 from Area 1, with the command

```
Router1# show ip ospf border-routers
```

Save the output to a file.

7. Save the Wireshark output of OSPF packet types (selecting the Print Detail option) that you did not observe in Part 4. Only include one packet of each type.

Question 5.2)

Include the Wireshark output in your report showing, if any, the different types of OSPF packets that you did not observe in Part 5.

DB Description

No.	Time	Source	Destination	Protocol	Length	
1	Info					
22	60.015195	10.0.1.2	10.0.1.1	OSPF	66	DB
	Description					
3	Frame 22: 66 bytes on wire (528 bits), 66 bytes captured (528 bits)					
5	Encapsulation type: Ethernet (1)					
	Arrival Time: Mar 11, 2016 15:56:23.457699000 CET					
7	[Time shift for this packet: 0.000000000 seconds]					
	Epoch Time: 1457708183.457699000 seconds					
9	[Time delta from previous captured frame: 0.000927000 seconds]					
	[Time delta from previous displayed frame: 0.000927000 seconds]					
11	[Time since reference or first frame: 60.015195000 seconds]					
	Frame Number: 22					
13	Frame Length: 66 bytes (528 bits)					
	Capture Length: 66 bytes (528 bits)					
15	[Frame is marked: False]					
	[Frame is ignored: False]					
17	[Protocols in frame: eth:ip:ospf]					
	[Coloring Rule Name: OSPF State Change]					
19	[Coloring Rule String: ospf.msg != 1]					
	Ethernet II, Src: 68:05:ca:36:31:f0 (68:05:ca:36:31:f0), Dst: 68:05:ca:36:33:a0 (68:05:ca:36:33:a0)					

```

21 Destination: 68:05:ca:36:33:a0 (68:05:ca:36:33:a0)
    Address: 68:05:ca:36:33:a0 (68:05:ca:36:33:a0)
23     .... 0. .... = LG bit: Globally unique address (factory
        default)
    .... 0. .... = IG bit: Individual address (unicast)
25 Source: 68:05:ca:36:31:f0 (68:05:ca:36:31:f0)
    Address: 68:05:ca:36:31:f0 (68:05:ca:36:31:f0)
27     .... 0. .... = LG bit: Globally unique address (factory
        default)
    .... 0. .... = IG bit: Individual address (unicast)
29 Type: IP (0x0800)
Internet Protocol Version 4, Src: 10.0.1.2 (10.0.1.2), Dst: 10.0.1.1 (10.0.1.1)
31 Version: 4
    Header length: 20 bytes
33    Differentiated Services Field: 0xc0 (DSCP 0x30: Class Selector 6; ECN: 0x00:
        Not-ECT (Not ECN-Capable Transport))
        1100 00.. = Differentiated Services Codepoint: Class Selector 6 (0x30)
35     .... 00.. = Explicit Congestion Notification: Not-ECT (Not ECN-Capable
        Transport) (0x00)
    Total Length: 52
37    Identification: 0xdc60 (56416)
    Flags: 0x00
39     0... .... = Reserved bit: Not set
        .0.. .... = Don't fragment: Not set
41     ..0. .... = More fragments: Not set
    Fragment offset: 0
43    Time to live: 1
        [Expert Info (Note/Sequence): "Time To Live" only 1]
45         [Message: "Time To Live" only 1]
47         [Severity level: Note]
49         [Group: Sequence]
    Protocol: OSPF IGP (89)
49    Header checksum: 0xc64e [validation disabled]
        [Good: False]
51         [Bad: False]
    Source: 10.0.1.2 (10.0.1.2)
53    Destination: 10.0.1.1 (10.0.1.1)
        [Source GeolP: Unknown]
55        [Destination GeolP: Unknown]
Open Shortest Path First
57    OSPF Header
        OSPF Version: 2
59        Message Type: DB Description (2)
        Packet Length: 32
61        Source OSPF Router: 10.0.1.2 (10.0.1.2)
        Area ID: 0.0.0.0 (Backbone)
63        Packet Checksum: 0x9493 [correct]
        Auth Type: Null
65        Auth Data (none)
    OSPF DB Description
67        Interface MTU: 1500
        Options: 0x02 (E)
69         0... .... = DN: DN-bit is NOT set
            .0.. .... = O: O-bit is NOT set
71         ..0. .... = DC: Demand Circuits are NOT supported
            ...0 .... = L: The packet does NOT contain LLS data block
73         .... 0... = NP: NSSA is NOT supported
            .... .0.. = MC: NOT Multicast Capable
75         .... .1. = E: External Routing Capability
            .... ...0 = MT: NO Multi-Topology Routing
77        DB Description: 0x07 (I, M, MS)
            .... 0... = R: OOBResync bit is NOT set
79             .... .1.. = I: Init bit is SET
            .... ..1. = M: More bit is SET
81             .... ...1 = MS: Master/Slave bit is SET
        DD Sequence: 1457717122

```

LS Request

No.	Time	Source	Destination	Protocol	Length	
2	27 60.016145	10.0.1.1	10.0.1.2	OSPF	70	LS
	Request					
4	Frame 27: 70 bytes on wire (560 bits), 70 bytes captured (560 bits)					
	Encapsulation type: Ethernet (1)					
6	Arrival Time: Mar 11, 2016 15:56:23.458649000 CET					
	[Time shift for this packet: 0.000000000 seconds]					
8	Epoch Time: 1457708183.458649000 seconds					
	[Time delta from previous captured frame: 0.000019000 seconds]					
10	[Time delta from previous displayed frame: 0.000019000 seconds]					
	[Time since reference or first frame: 60.016145000 seconds]					
12	Frame Number: 27					
	Frame Length: 70 bytes (560 bits)					
14	Capture Length: 70 bytes (560 bits)					
	[Frame is marked: False]					
16	[Frame is ignored: False]					
	[Protocols in frame: eth:ip:ospf]					
18	[Coloring Rule Name: OSPF State Change]					
	[Coloring Rule String: ospf.msg != 1]					
20	Ethernet II, Src: 68:05:ca:36:33:a0 (68:05:ca:36:33:a0), Dst: 68:05:ca:36:31:f0 (68:05:ca:36:31:f0)					
	Destination: 68:05:ca:36:31:f0 (68:05:ca:36:31:f0)					
22	Address: 68:05:ca:36:31:f0 (68:05:ca:36:31:f0)					
 0. = LG bit: Globally unique address (factory default)					
24 0. = IG bit: Individual address (unicast)					
	Source: 68:05:ca:36:33:a0 (68:05:ca:36:33:a0)					
26	Address: 68:05:ca:36:33:a0 (68:05:ca:36:33:a0)					
 0. = LG bit: Globally unique address (factory default)					
28 0. = IG bit: Individual address (unicast)					
	Type: IP (0x0800)					
30	Internet Protocol Version 4, Src: 10.0.1.1 (10.0.1.1), Dst: 10.0.1.2 (10.0.1.2)					
	Version: 4					
32	Header length: 20 bytes					
	Differentiated Services Field: 0xc0 (DSCP 0x30: Class Selector 6; ECN: 0x00: Not-ECT (Not ECN-Capable Transport))					
34	1100 00.. = Differentiated Services Codepoint: Class Selector 6 (0x30)					
00 = Explicit Congestion Notification: Not-ECT (Not ECN-Capable Transport) (0x00)					
36	Total Length: 56					
	Identification: 0xdc6c (56428)					
38	Flags: 0x00					
	0... = Reserved bit: Not set					
40	.0.. = Don't fragment: Not set					
	..0. = More fragments: Not set					
42	Fragment offset: 0					
	Time to live: 1					
44	[Expert Info (Note/Sequence): "Time To Live" only 1]					
	[Message: "Time To Live" only 1]					
46	[Severity level: Note]					
	[Group: Sequence]					
48	Protocol: OSPF IGP (89)					
	Header checksum: 0xc63e [validation disabled]					
50	[Good: False]					
	[Bad: False]					
52	Source: 10.0.1.1 (10.0.1.1)					
	Destination: 10.0.1.2 (10.0.1.2)					
54	[Source GeoIP: Unknown]					
	[Destination GeoIP: Unknown]					
56	Open Shortest Path First					
	OSPF Header					
58	OSPF Version: 2					
	Message Type: LS Request (3)					

```

60      Packet Length: 36
        Source OSPF Router: 10.0.1.1 (10.0.1.1)
62      Area ID: 0.0.0.0 (Backbone)
        Packet Checksum: 0xdcd2 [correct]
64      Auth Type: Null
        Auth Data (none)
66      Link State Request
        LS Type: Router-LSA (1)
68      Link State ID: 10.0.1.2
        Advertising Router: 10.0.1.2 (10.0.1.2)

```

Question 5.3)

Include the output of the link state databases saved in Step 5.

The link state databases of the PCs can be found in the "/Lab 4/traces/5-5.PC*.out" files.

Router1

```

1      OSPF Router with ID (10.0.2.3) (Process ID 1)
3
3      Router Link States (Area 1)
5  Link ID      ADV Router      Age          Seq#          Checksum Link count
   10.0.1.1     10.0.1.1       712         0x80000009   0x005DB1 1
7   10.0.2.3     10.0.2.3       729         0x80000005   0x0011B2 2
   10.0.3.4     10.0.3.4       711         0x80000008   0x0007BA 2
9   10.0.4.5     10.0.4.5       707         0x80000003   0x004F68 2
11
11     Net Link States (Area 1)
13  Link ID      ADV Router      Age          Seq#          Checksum
   10.0.2.1     10.0.1.1       712         0x80000005   0x00B852
15  10.0.3.4     10.0.3.4       730         0x80000001   0x0072A5
   10.0.4.4     10.0.3.4       711         0x80000002   0x00937E
17
17     Summary Net Link States (Area 1)
19  Link ID      ADV Router      Age          Seq#          Checksum
21  10.0.1.0     10.0.1.1       832         0x80000001   0x00DA61
   10.0.5.0     10.0.1.1       242         0x80000001   0x00131B
23  10.0.6.0     10.0.1.1       242         0x80000001   0x00121A
   10.0.7.0     10.0.1.1       244         0x80000001   0x000724

```

Router2

```

2      OSPF Router with ID (10.0.4.5) (Process ID 1)
4
4      Router Link States (Area 1)
6  Link ID      ADV Router      Age          Seq#          Checksum Link count
   10.0.1.1     10.0.1.1       684         0x80000009   0x005DB1 1
   10.0.2.3     10.0.2.3       702         0x80000005   0x0011B2 2
8   10.0.3.4     10.0.3.4       683         0x80000008   0x0007BA 2
   10.0.4.5     10.0.4.5       679         0x80000003   0x004F68 2
10
10     Net Link States (Area 1)
12  Link ID      ADV Router      Age          Seq#          Checksum
14  10.0.2.1     10.0.1.1       684         0x80000005   0x00B852
   10.0.3.4     10.0.3.4       703         0x80000001   0x0072A5
16  10.0.4.4     10.0.3.4       683         0x80000002   0x00937E
18
18     Summary Net Link States (Area 1)

```

20	Link ID	ADV Router	Age	Seq#	Checksum
	10.0.1.0	10.0.1.1	805	0x80000001	0x00DA61
22	10.0.5.0	10.0.1.1	215	0x80000001	0x00131B
	10.0.6.0	10.0.1.1	215	0x80000001	0x00121A
24	10.0.7.0	10.0.1.1	217	0x80000001	0x000724

Router3

OSPF Router with ID (10.0.6.6) (Process ID 1)					
2					
4	Router Link States (Area 2)				
6	Link ID	ADV Router	Age	Seq#	Checksum Link count
	10.0.1.2	10.0.1.2	248	0x80000005	0x00D72D 1
	10.0.6.6	10.0.6.6	281	0x80000006	0x002C6E 2
8	10.0.6.7	10.0.6.7	284	0x8000000A	0x004259 2
	10.0.7.8	10.0.7.8	280	0x80000005	0x00622D 2
10					
12	Net Link States (Area 2)				
14	Link ID	ADV Router	Age	Seq#	Checksum
	10.0.5.6	10.0.6.6	247	0x80000002	0x00F5D7
	10.0.6.7	10.0.6.7	290	0x80000002	0x009D60
16	10.0.7.7	10.0.6.7	284	0x80000002	0x00B742
18					
	Summary Net Link States (Area 2)				
20	Link ID	ADV Router	Age	Seq#	Checksum
	10.0.1.0	10.0.1.2	249	0x80000001	0x00D466
22	10.0.2.0	10.0.1.2	249	0x80000001	0x002E02
	10.0.3.0	10.0.1.2	249	0x80000001	0x002D01
24	10.0.4.0	10.0.1.2	249	0x80000001	0x00220B

Router4

OSPF Router with ID (10.0.7.8) (Process ID 1)					
2					
4	Router Link States (Area 2)				
6	Link ID	ADV Router	Age	Seq#	Checksum Link count
	10.0.1.2	10.0.1.2	333	0x80000005	0x00D72D 1
	10.0.6.6	10.0.6.6	368	0x80000006	0x002C6E 2
8	10.0.6.7	10.0.6.7	369	0x8000000A	0x004259 2
	10.0.7.8	10.0.7.8	363	0x80000005	0x00622D 2
10					
12	Net Link States (Area 2)				
14	Link ID	ADV Router	Age	Seq#	Checksum
	10.0.5.6	10.0.6.6	335	0x80000002	0x00F5D7
	10.0.6.7	10.0.6.7	375	0x80000002	0x009D60
16	10.0.7.7	10.0.6.7	369	0x80000002	0x00B742
18					
	Summary Net Link States (Area 2)				
20	Link ID	ADV Router	Age	Seq#	Checksum
	10.0.1.0	10.0.1.2	334	0x80000001	0x00D466
22	10.0.2.0	10.0.1.2	334	0x80000001	0x002E02
	10.0.3.0	10.0.1.2	334	0x80000001	0x002D01
24	10.0.4.0	10.0.1.2	352	0x80000001	0x00220B

Question 5.4)

Explain the output of the command “show ip ospf border-routers” in Step 6.

```
Router1#show ip ospf border-routers
2
3 OSPF Process 1 internal Routing Table
4
5 Codes: i – Intra-area route, I – Inter-area route
6
7 i 10.0.1.1 [1] via 10.0.2.1, Vlan1, ABR, Area 1, SPF 7
```

Router1 is in Area 1. Area 1 has PC1 as border router.

The output of "show ip ospf border-routers" on Router1 shows that the border router is at 10.0.1.11 and can be reached through 10.0.2.1 through the router's Vlan1 interface.