



Katholieke
Universiteit
Leuven

Department of
Computer Science

Shared Internet Of Things Infrastructure Platform: The Complete Architecture Software Architecture (H09B5a and H07Z9a) – Part 2b

FILIPCIKOVA-HALILOVIC

Monika Filipcikova (r0683254)
Armin Halilovic(r0679689)

Academic year 2016–2017

Contents

1	Architectural Decisions	5
1.1	Av1: Communication between SIO TIP gateway and Online Service	5
1.2	Av2: Application failure	6
1.3	Av3: Pluggable device or mote failure	7
1.4	M1: Integrate new sensor or actuator manufacturer	9
1.5	P1: Large number of users	11
1.6	U2: Easy installation	12
1.7	Other decisions	12
1.7.1	Decision 1	12
1.8	Discussion	13
2	Client-server view (UML Component diagram)	14
2.1	Context diagram	14
2.2	Primary diagram	16
3	Decomposition view (UML Component diagram)	18
4	Deployment view (UML Deployment diagram)	23
4.1	Context diagram	23
4.2	Primary diagram	25
5	Scenarios	27
5.1	Scenarios	27
6	Element Catalog and Datatypes	37
7	Catalog	38
7.1	Components	38
7.1.1	AccessRightsManager	38
7.1.2	ApplicationContainer	38
7.1.3	ApplicationContainerManager	38
7.1.4	ApplicationContainerMonitor	38
7.1.5	ApplicationExecutionSubsystemMonitor	38
7.1.6	ApplicationFrontEndClient	39
7.1.7	ApplicationFrontEndFacade	39
7.1.8	ApplicationInstance	39
7.1.9	ApplicationManagementLogic	39
7.1.10	ApplicationManager	39
7.1.11	ApplicationProviderClient	40
7.1.12	ApplicationProviderFacade	40
7.1.13	AuthenticationManager	40
7.1.14	ContainerLogic	40
7.1.15	CustomerOgranisationClient	40
7.1.16	CustomerOrganisationFacade	40
7.1.17	DeviceCommandConstructor	41
7.1.18	DeviceDataConverter	41
7.1.19	DeviceDataScheduler	41
7.1.20	DeviceDB	41
7.1.21	DeviceManager	41
7.1.22	Gateway	42

7.1.23	GatewayBroker	42
7.1.24	GatewayBrokerMonitor	42
7.1.25	GatewayMonitor	42
7.1.26	GWBrokerLogic	42
7.1.27	InfrastructureOwnerClient	43
7.1.28	InfrastructureOwnerFacade	43
7.1.29	InfrastructureOwnerManager	43
7.1.30	InvoiceManager	43
7.1.31	Mote	43
7.1.32	NotificationHandler	43
7.1.33	OnlineServiceBroker	44
7.1.34	OnlineServiceBrokerMonitor	44
7.1.35	OnlineServiceMonitor	44
7.1.36	OSBrokerLogic	44
7.1.37	OtherDataDB	45
7.1.38	PluggableDevice	45
7.1.39	PluggableDeviceDataDB	45
7.1.40	RegisteredUserFacade	45
7.1.41	RequestStore	45
7.1.42	SessionDB	46
7.1.43	SubscriptionManager	46
7.1.44	SystemAdministratorFacade	46
7.1.45	ThirdPartyInvoicingService	46
7.1.46	ThirdPartyNotificationDeliveryService	46
7.1.47	TopologyManager	46
7.1.48	UnregisteredUserClient	47
7.1.49	UnregisteredUserFacade	47
7.1.50	UserManager	47
7.2	Interfaces	47
7.2.1	AccessRights	47
7.2.2	AccessRightsMgmt	47
7.2.3	Actuate	48
7.2.4	Actuate	48
7.2.5	AppDeviceData	48
7.2.6	AppDeviceMgmt	48
7.2.7	AppInstanceMgmt	49
7.2.8	AppMessages	49
7.2.9	AppMonitoring	50
7.2.10	AppStatus	50
7.2.11	Authentication	50
7.2.12	Authentication	50
7.2.13	Commands	51
7.2.14	Config	51
7.2.15	Config	51
7.2.16	DataConversion	52
7.2.17	DBAccessRightsMgmt	52
7.2.18	DBAppDeviceMgmt	52
7.2.19	DBAppMgmt	52
7.2.20	DBDeviceData	53
7.2.21	DBDeviceMgmt	54
7.2.22	DBInvoiceMgmt	54
7.2.23	DBIODeviceMgmt	55
7.2.24	DBIOMgmt	55
7.2.25	DBNotificationMgmt	55

7.2.26	DBSubscriptionMgmt	56
7.2.27	DBTopologyMgmt	56
7.2.28	DBUserMgmt	57
7.2.29	DeliveryMgmt	58
7.2.30	DeliveryMgmt	58
7.2.31	DeviceCommands	59
7.2.32	DeviceCommands	59
7.2.33	DeviceData	59
7.2.34	DeviceData	59
7.2.35	DeviceMgmt	60
7.2.36	ForwardData	60
7.2.37	FrontEndAppRequests	60
7.2.38	GatewayUpdates	61
7.2.39	GWAppInstanceMgmt	61
7.2.40	GWBrokerMonitoring	62
7.2.41	GWCommunication	62
7.2.42	Heartbeat	62
7.2.43	InvoiceDeliveryMgmt	62
7.2.44	InvoiceMgmt	62
7.2.45	IOMgmt	63
7.2.46	Monitoring	63
7.2.47	NotificationDeliveryMgmt	63
7.2.48	Notifications	63
7.2.49	Notifications	64
7.2.50	Notify	64
7.2.51	OSBrokerMonitoring	64
7.2.52	OSCommunication	64
7.2.53	OSMonitoring	65
7.2.54	OSUpdates	65
7.2.55	Registration	65
7.2.56	RequestData	66
7.2.57	RequestData	66
7.2.58	RequestData	66
7.2.59	Requests	66
7.2.60	RoleMgmt	67
7.2.61	Sessions	67
7.2.62	SubscriptionMgmt	67
7.2.63	SubscriptionMgmt	68
7.2.64	TopologyMgmt	68
7.2.65	TopologyMgmt	69
7.2.66	UserMgmt	70
7.2.67	UserMgmt	71
7.3	Exceptions	71
7.4	Data types	71

A	Attribute-driven design documentation	74
A.1	Introduction	74
A.2	Adapted ADD process	74
A.3	Decomposition 1: Av3, UC14, UC15, UC18 (SIoTIP System)	75
A.4	Decomposition 2: M1, P2, UC11 (OtherFunctionality1)	81
A.5	Decomposition 4: Av2, UC12, UC25, UC26, UC27 (application execution subsystem)	87
A.6	Decomposition 5: Av1 (Gateway - Online Service communication subsystem)	90
A.7	Decomposition 6: P1, UC1, UC2, UC3, UC5, UC7, UC8, UC16, UC20 (Elements/Subsystem to decompose/expand)	94

A.8	Decomposition 7: UC28, UC29 (Elements/Subsystem to decompose/expand)	97
A.9	Decomposition 9: UC21 (Elements/Subsystem to decompose/expand)	99

1. Architectural Decisions

Note: This section discusses *all* your architectural decisions *in-depth*. First, *all* decisions related to the non-functionals are discussed in detail. Next, *all* other decisions are listed and discussed.

Hint: Don't just say *what* you have done. Explain *why* you have done it.

1.1 Av1: Communication between SIoTIP gateway and Online Service

TODO: Use this section structure for each requirement

Key Decisions

TODO: Briefly list your key architectural decisions. Pay attention to the solutions that you employed (in your own terms or using tactics and/or patterns).

- decision 1
- ...

Employed tactics and patterns: ...

Rationale

TODO: Describe the design choices related to *ReqX* together with the rationale of why these choices were made.

Considered Alternatives

Alternative(s) for choice 1 Explain what alternative(s) you considered for this design choice and why they were not selected.


Deployment Decisions

...


Considered Deployment Alternatives

...

1.2 Av2: Application failure

 **TODO:** Use this section structure for each requirement

Key Decisions

 **TODO:** Briefly list your key architectural decisions. Pay attention to the solutions that you employed (in your own terms or using tactics and/or patterns).

- decision 1
- ...

Employed tactics and patterns: ...

Rationale

 **TODO:** Describe the design choices related to *ReqX* together with the rationale of why these choices were made.

Considered Alternatives

Alternative(s) for choice 1 Explain what alternative(s) you considered for this design choice and why they were not selected.


Deployment Decisions

...


Considered Deployment Alternatives

...

1.3 Av3: Pluggable device or mote failure

 **TODO:** Use this section structure for each requirement

Key Decisions

 **TODO:** Briefly list your key architectural decisions. Pay attention to the solutions that you employed (in your own terms or using tactics and/or patterns).

- **DeviceManager** monitors connected/operational devices on a gateway.
- **DeviceManager** stores the requirements for pluggable devices set by applications

Employed tactics and patterns: heartbeat, ping/echo

Rationale

Failure detection Gateway need to be able to autonomously detect failure of one of its connected motes and pluggable devices. This is achieved by making motes send heartbeats to their connected gateways. The gateways can then monitor their connected devices. The heartbeats contain a list of devices that are connected/operational at the moment the mote sends the heartbeat. Each gateway makes use of a **DeviceManager** component to monitor the devices. This component uses timers to keep track of how long it has been since a device has sent a heartbeat or occurred in a list of connected devices. Once a timer expires, this is treated as a failure.

A mote has failed when 3 consecutive heartbeats do not arrive within 1 second of their expected arrival time.
A pluggable device has failed when it does not occur in a heartbeat of the mote in which it is expected to be in. This is detected within 2 seconds after the arrival of the heartbeat.

Automatic application deactivation and redundancy settings Applications should be automatically suspended when they can no longer operate due to failure of a pluggable device or mote and reactivated once the failure is resolved. Application providers can design their applications such that they explicitly require redundancy in the available pluggable devices.

This problem is tackled by the **DeviceManager**. It stores the requirements for pluggable devices set by applications for all applications that use the gateway that the **DeviceManager** runs on. When it detects that an application can no longer operate due to failures, it will send a command to the **ApplicationManager** (via the **GatewayFacade**) to suspend that application. When the required devices are operational again, the **DeviceManager** detects this and sends a command to reactivate the application.

Applications are suspended within 1 minute after detecting the failure of an essential pluggable device.
Application are reactivated within 1 minute after the failure is resolved.

Notifications The infrastructure owner should be notified of any persistent pluggable device or mote failures. Customer organisations should be notified if one or more of their applications is suspended or reactivated. Applications using a failed pluggable device or any device on a failed mote should be notified.

The **NotificationHandler** was put in place to deal with notifications. Other components can use it to generate notifications for certain users in the system. The **NotificationHandler** will then insert information relevant to the notification in the database (message, status, date and time, source, ...), and use an external delivery service to deliver the notification to users. The used delivery medium is based on the user's preferences. The **DeviceManager** sends request to the external delivery service to notifies the infrastructure owner, once mote or pluggable device failure occurs. Since they are stored in the database, users can always view their notifications via their dashboard. However, this functionality is not expanded on in this decomposition yet.

Infrastructure owners are notified within 1 minute after detecting a mote outage lasting at least 10 seconds.
Infrastructure owners are notified within 1 minute after the detection of the unavailability of a pluggable device for 30 seconds.
Applications are notified of the failure of relevant pluggable devices within 10 seconds.

Considered Alternatives

Alternative for failure detection An alternative would have been to move the **DeviceManager** component from gateways to the Online Service. This solution would make the gateways do less work, but would be very unscalable. The reason is that as the customer base (and thus the amount of devices) increases, the Online Service would need to keep track of huge amounts of devices. This would also flood the network to the Online Service with heartbeats.


Alternative for Failure detection Another alternative for failure detection could have been the use of a Ping/Echo mechanism instead of Heartbeats. Pings could then be used to check if a device is currently operational. However, as a device could not be operational for a moment because of e.g. interference, timers would still be necessary to keep track of operational devices. We opted to use heartbeats, as this would reduce the amount of data sent over the network used by the motes, and as motes would have to do slightly more work to process each Ping request in order to generate a reply.

Av3: Notifications Reliable and quick delivery of notifications is crucial to the system in order to solve problems should things go wrong. Currently, the solution is to use a third party service for delivery of notifications. In the case that no external services are found satisfactory, or if this dependency on an external service is unwanted, it is possible to build an internal solution for this. For example, a **NotificationSender** component could make use of the **Factory pattern** for different message channels for different delivery methods (each with their own `sendNotification` method). This solution allows us to easily add new message channels in the future with little effort. The disadvantage of this is that an internal solution takes a lot more time to implement.


Deployment Decisions

For Av3 is important that the **DeviceManager** is deployed on another node as the **Mote** and the **PluggableDevice**. The **DeviceManager** checks the **Mote** and the **PluggableDevice** availability and in case of failure, the **DeviceManager** can notify the infrastructure owner of any persistent pluggable device or mote failures.

1.4 M1: Integrate new sensor or actuator manufacturer

 **TODO:** Use this section structure for each requirement

Key Decisions

 **TODO:** Briefly list your key architectural decisions. Pay attention to the solutions that you employed (in your own terms or using tactics and/or patterns).

- decision 1
- ...

Employed tactics and patterns: ...

Rationale

M1: Data conversion With new types of devices, the pluggable data processing subsystem should be extended with relevant data conversions, e.g. converting temperature in degrees Fahrenheit to degrees Celsius. The `DeviceDataConverter` is put in place to handle the task of converting pluggable device data to data of a different type in the system. This component can easily be modified for new types of data simply by adding a new conversion method for the new.

M1: Usage of new data by applications The available applications in the system can be updated to use any new pluggable devices.

This is made possible by the `RequestData` interface provided by `DeviceDataScheduler`. Data of the new type of device can be requested in the same way as for older devices: by using the device's unique id. The application manager can get pluggable device data from the `PluggableDeviceDataDB` and return this data to applications in the `DeviceData` datatype. This datatype can easily be updated for new types of pluggable devices.

P2: Scheduling The pluggable data processing subsystem needs to be able to run in normal or overload mode, depending on whether or not the system can process requests within the deadlines given in the quality requirement. Also, a mechanism should be in place to avoid starvation of any type of request.

The `DeviceDataScheduler` is used to deal with this problem. It is responsible for scheduling requests that wish to interact with the `PluggableDeviceDataDB`. In normal mode, the system processes incoming requests in a FIFO order. In overload mode, the requests are given a priority based on what the request is for and what the source of the request is. The requests are then not simply processed in an order based on their priorities, but an aging technique is to be used such that starvation will be avoided. Thus, in overload mode, requests are processed in an order based on a combination of the priorities of the requests and the age of the requests.

P2: Pluggable data separation The processing of (large amounts of) requests concerning pluggable data has no impact on requests concerning other data, e.g. available applications.

In order to satisfy this constraint, all data directly related to pluggable data has been separated into the `PluggableDeviceDataDB`. All requests concerning pluggable data will be handled by this new component. `PluggableDeviceDataDB` will run on a node different from the node that the `Database` component runs on. This way requests concerning pluggable will have no impact on requests concerning other data.

M1: Handling new types of pluggable devices The new types of sensor or actuator data should be transmitted, processed and stored, and should be made available to applications. The infrastructure managers must be able to initialize the new type of pluggable device, configure access rights for these devices, and view detailed information about the new type of pluggable device.

The components created thus far have been created with high cohesion in mind so that updating them for new devices would be relatively straightforward. In order for this constraint to be satisfied, changes have to be made to the following elements:

- *PluggableDevice*: This component needs to be updated so that the new type of device can be initialised and configured, and thus so that the device's data can be sent to the system.
- *DeviceData*: Depending on how this data type is implemented, it might need an update in order for it to represent possible new data types (for example Temperature Filipcikova) and for the new data types to be serialized.
- *PluggableDeviceDataDB*: The database needs to be updated so that information can be retrieved about the new types of sensors and the new types of data. Data related to the displaying of sensor data will also need to be updated.
- *PluggableDeviceConverter*: see above.

Considered Alternatives

Alternative(s) for choice 1 Explain what alternative(s) you considered for this design choice and why they were not selected.


Deployment Decisions

...


Considered Deployment Alternatives

...

1.5 P1: Large number of users

 **TODO:** Use this section structure for each requirement

Key Decisions

 **TODO:** Briefly list your key architectural decisions. Pay attention to the solutions that you employed (in your own terms or using tactics and/or patterns).

- decision 1
- ...

Employed tactics and patterns: ...

Rationale

 **TODO:** Describe the design choices related to *ReqX* together with the rationale of why these choices were made.

Considered Alternatives

Alternative(s) for choice 1 Explain what alternative(s) you considered for this design choice and why they were not selected.


Deployment Decisions

...


Considered Deployment Alternatives

...

1.6 U2: Easy installation

 **TODO:** Use this section structure for each requirement

Key Decisions

 **TODO:** Briefly list your key architectural decisions. Pay attention to the solutions that you employed (in your own terms or using tactics and/or patterns).

- decision 1
- ...

Employed tactics and patterns: ...

Rationale

 **TODO:** Describe the design choices related to *ReqX* together with the rationale of why these choices were made.

Considered Alternatives

Alternative(s) for choice 1 Explain what alternative(s) you considered for this design choice and why they were not selected.


Deployment Decisions

...

Considered Deployment Alternatives

...

1.7 Other decisions

 **TODO:** *Optional* If you have made any other important architectural decisions that do not directly fit in the sections of the other qualities you can mention them here. Follow the same structure as above.

1.7.1 Decision 1

KeyDecisions

...

Rationale

...

Considered Alternatives

...


Deployment Decisions

...

Considered Deployment Alternatives

...

1.8 Discussion

 **TODO:** Use this section to discuss your architecture in retrospect. For example, what are the strong points of your architecture? What are the weak points? Is there anything you would have done otherwise with your current experience? Are there any remarks about the architecture that you would give to your customers? Etc.

Nothing about application state -> maybe could force app developers to add a procedure to save application state so that we could save this and reload that state later.

Very high coupling for ApplicationManager

Something about Modifiability problems we didn't think about.

Too much communication between gateways and online service

2. Client-server view (UML Component diagram)

Figures

2.1	Context diagram for the client-server view.	15
2.2	Primary diagram of the client-server view.	17

✓ **Hint:** No need to just repeat what we can see on the diagram.

Don't do this: *As you can see on fig. x: comp A consists of B and C, and C connects to D.*

But, please do explain if there is anything non-trivial (e.g., a custom mapping from actors to external components on the context diagram).

✓ **Hint:** Add any essential information, necessary for interpreting the figure, in the caption. Be sure to add a separate short title for inclusion in the list of figures: `\caption[shorttitle]{longtitle}`.

If your explanation becomes too long for the caption, you can create a separate subsection. Don't forget to refer to the figure and vice versa.

✓ **Hint:** If you have any doubts about the size of your figures, it is better to make your figure too large than too small. Alternatively, you can test the readability by printing it.

⚠ **Attention:** With regard to the context diagram, recall the lectures on what it means and should contain. Be sure not to miss any elements here. This is a frequent source of errors.

⚠ **Attention:** Make sure your main component-and-connector and context diagrams are consistent.

2.1 Context diagram

The context diagram of the client-server view is displayed in figure 2.1.

The external components are as follows.

- NotificationDeliveryService: blabla
- InfrastructureOwnerClient: blabla
- CustomerOrganisationClient: blabla

📌 **TODO:** The context diagram of the client-server view: Discuss which components communicate with external components and what these external components represent.

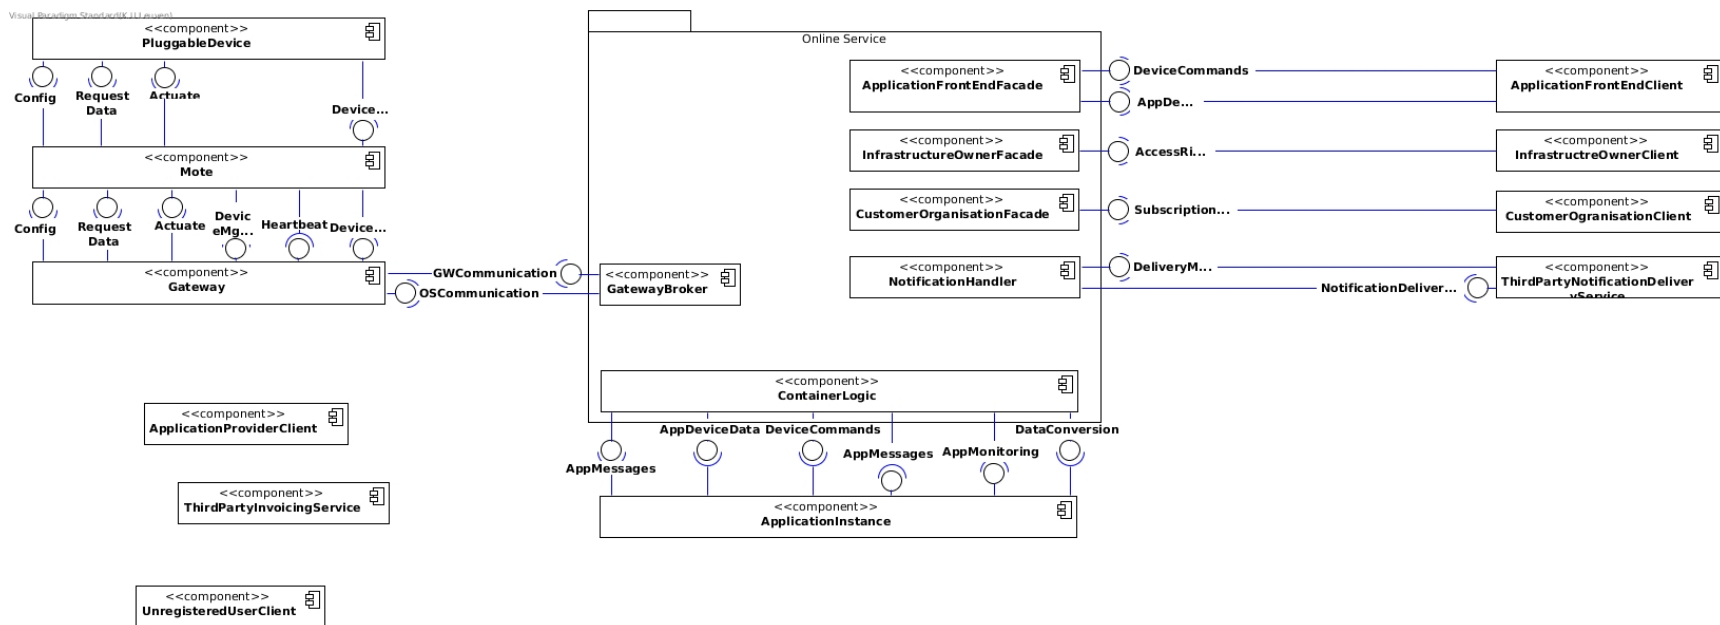



Figure 2.1: Context diagram for the client-server view.

2.2 Primary diagram

The primary diagram of the client-server view is displayed in figure 2.2.

 **TODO:** The primary diagram and accompanying explanation.

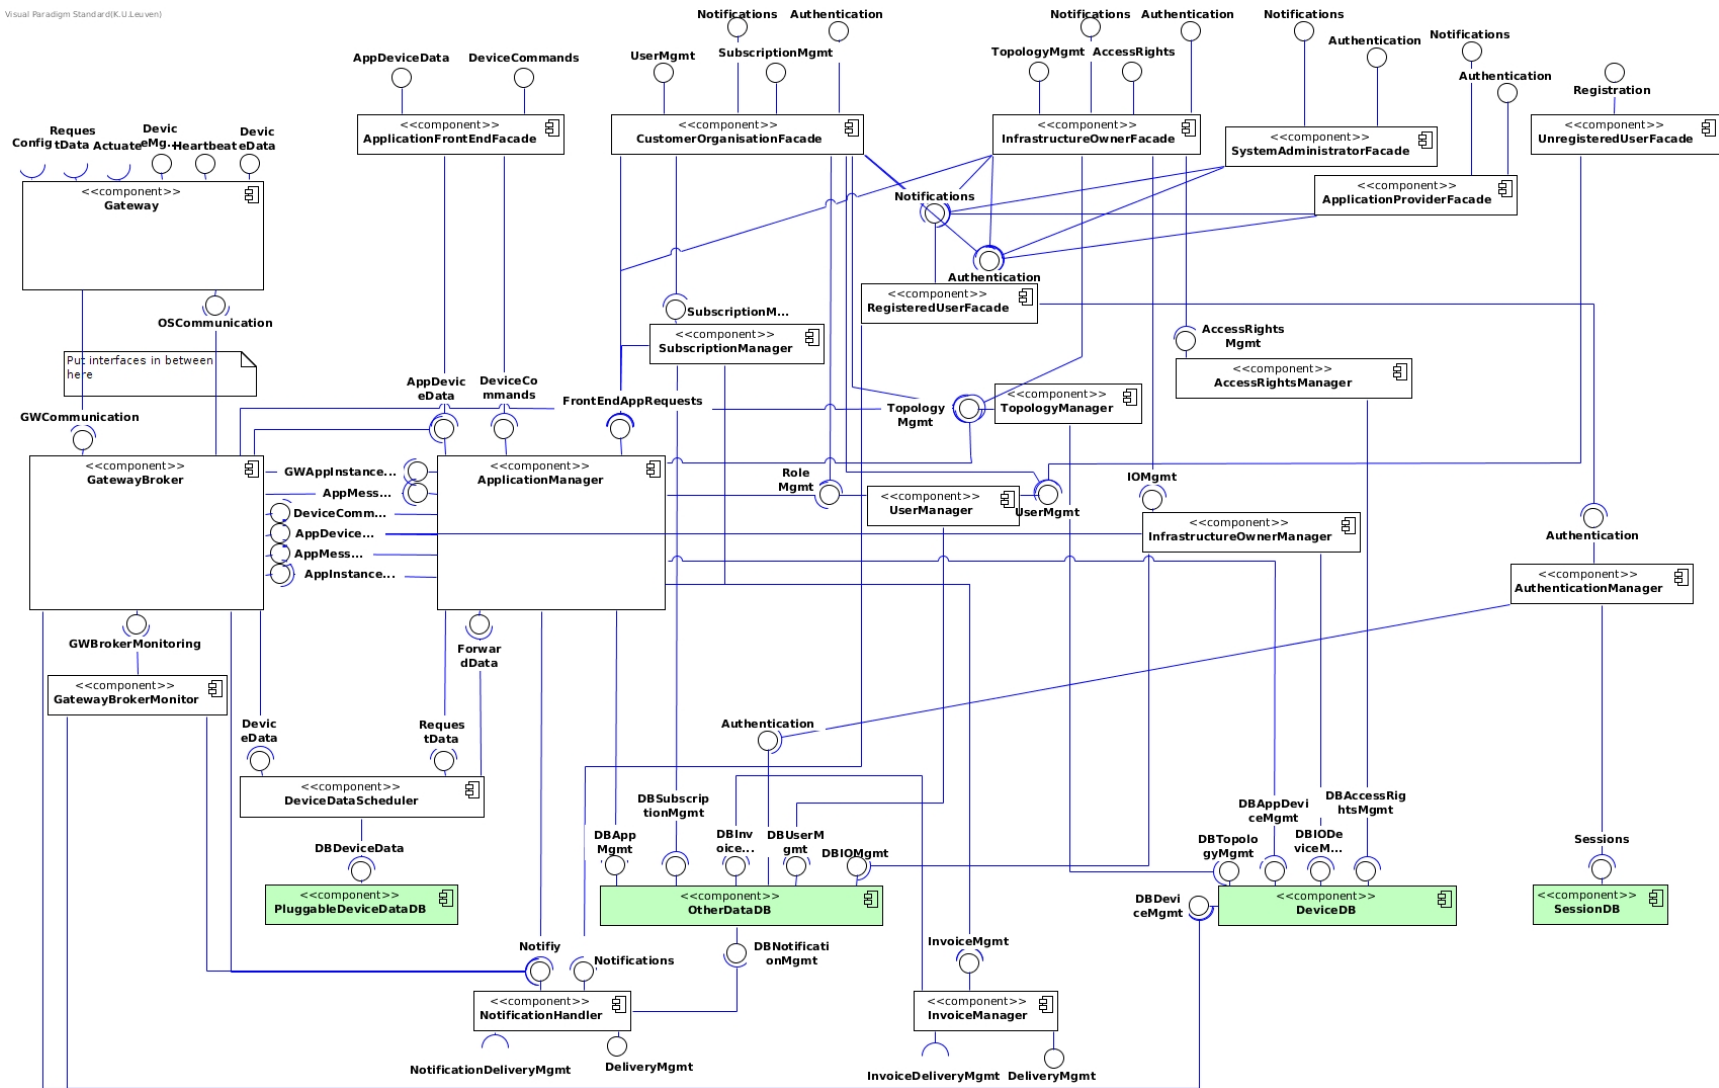


Figure 2.2: Primary diagram of the client-server view.

3. Decomposition view (UML Component diagram)

Figures

3.1	Decomposition of <code>Gateway</code>	19
3.2	Decomposition of <code>ApplicationManager</code>	20
3.3	Decomposition of <code>GatewayBroker</code>	21
3.4	Decomposition of <code>OnlineServiceBroker</code>	22

✓ **Hint:** No need to just repeat what we can see on the diagram.

Don't do this: *As you can see on fig. x: comp A consists of B and C, and C connects to D.*

But, please do explain if there is anything non-trivial (e.g., a custom mapping from actors to external components on the context diagram).

✓ **Hint:** Add any essential information, necessary for interpreting the figure, in the caption. Be sure to add a separate short title for inclusion in the list of figures: `\caption[shorttitle]{longtitle}`.

If your explanation becomes too long for the caption, you can create a separate subsection. Don't forget to refer to the figure and vice versa.

▲ **Attention:** *Consistency between views!* Be sure to check for consistency between the client-server view and your decompositions.

▲ **Attention:** *Consistency of a single decomposition!* Make sure that every interface provided or required by the decomposed component, is provided or required by a subcomponent in the decomposition.

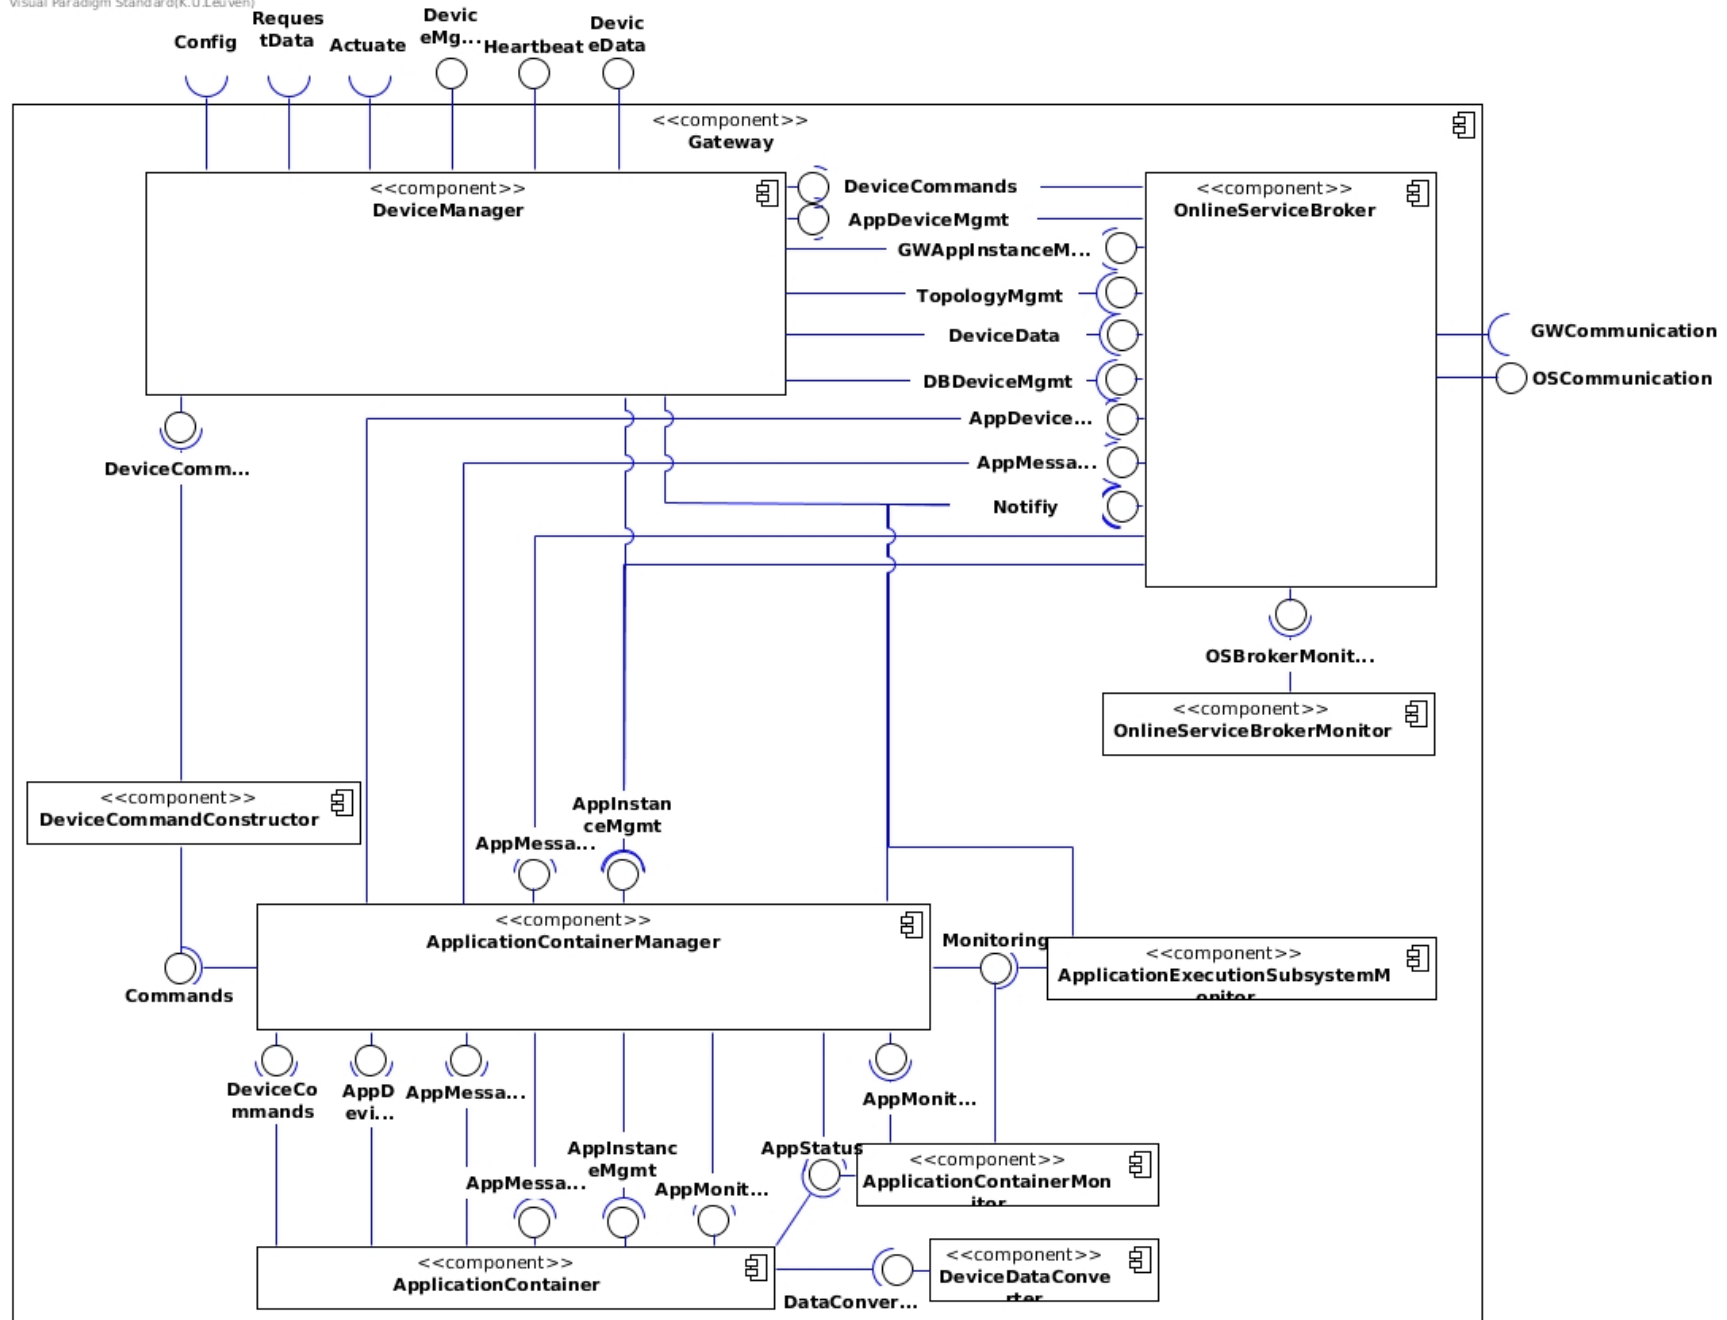


Figure 3.1: Decomposition of Gateway.

This caption contains a longer explanation over multiple lines. This additional explanation is not shown in the list of figures.

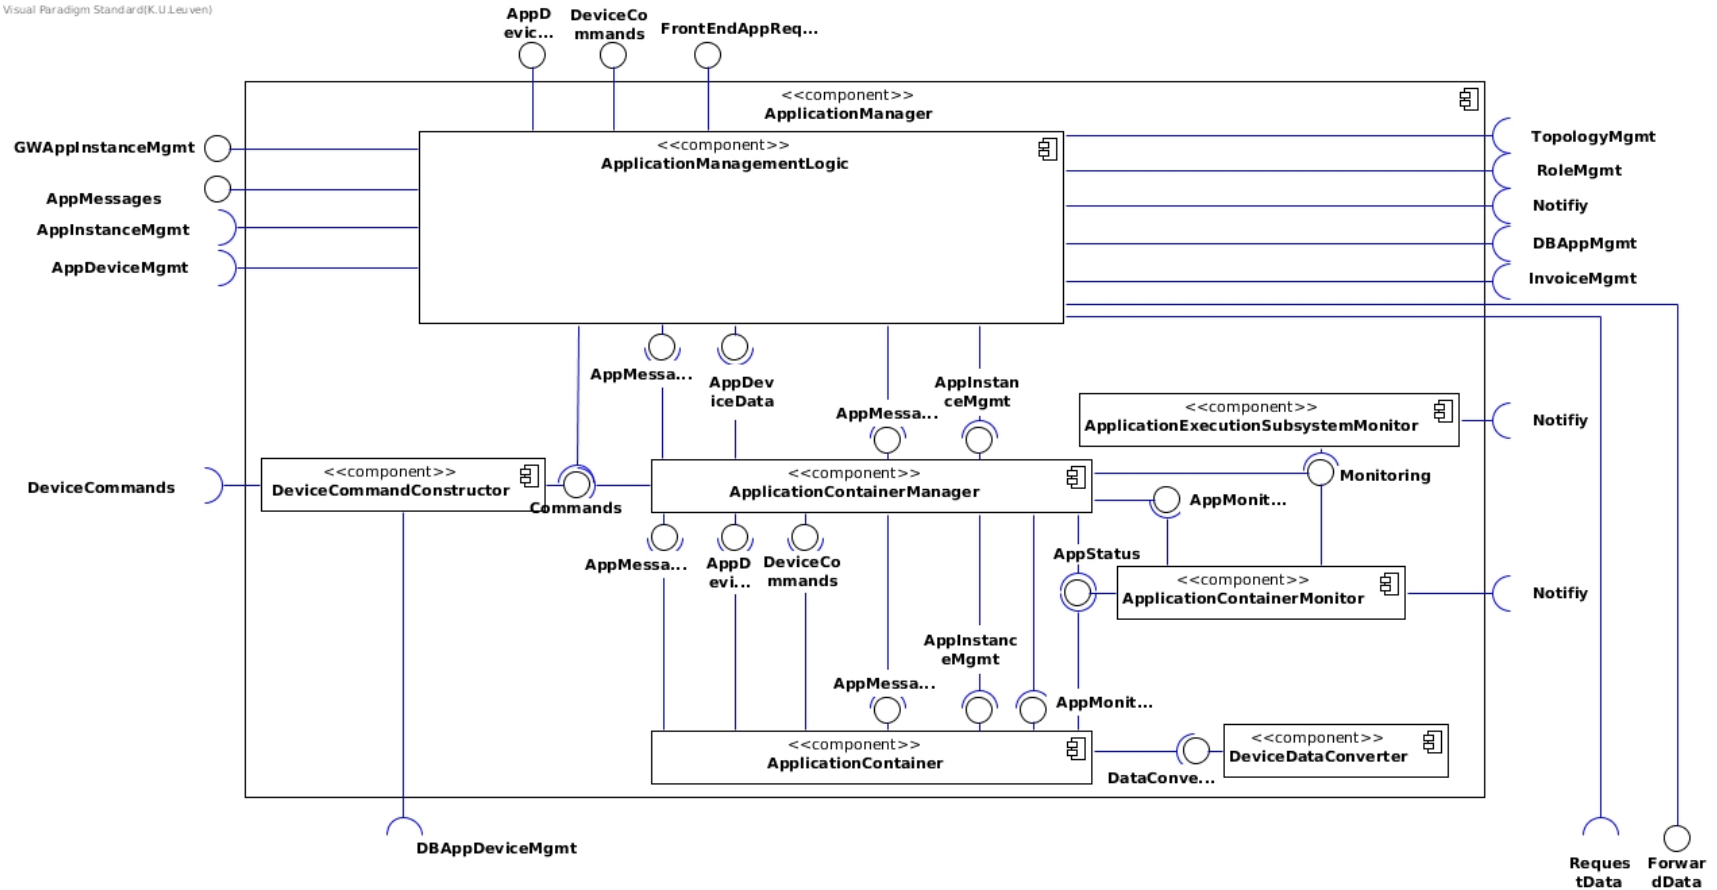


Figure 3.2: Decomposition of ApplicationManager.

This caption contains a longer explanation over multiple lines. This additional explanation is not shown in the list of figures.

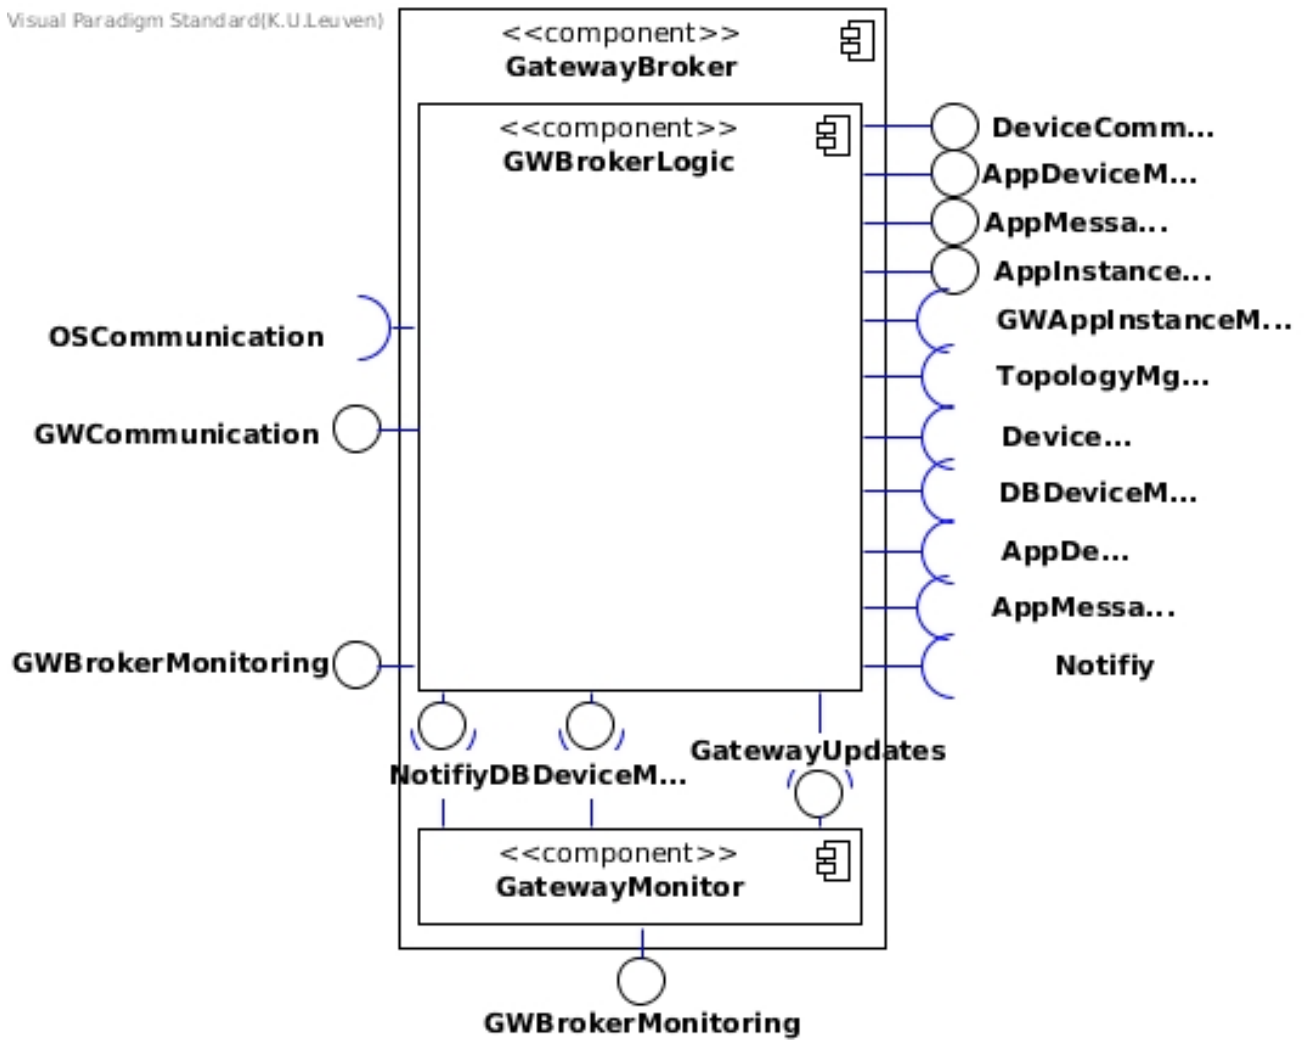


Figure 3.3: Decomposition of **GatewayBroker**.

This caption contains a longer explanation over multiple lines. This additional explanation is not shown in the list of figures.

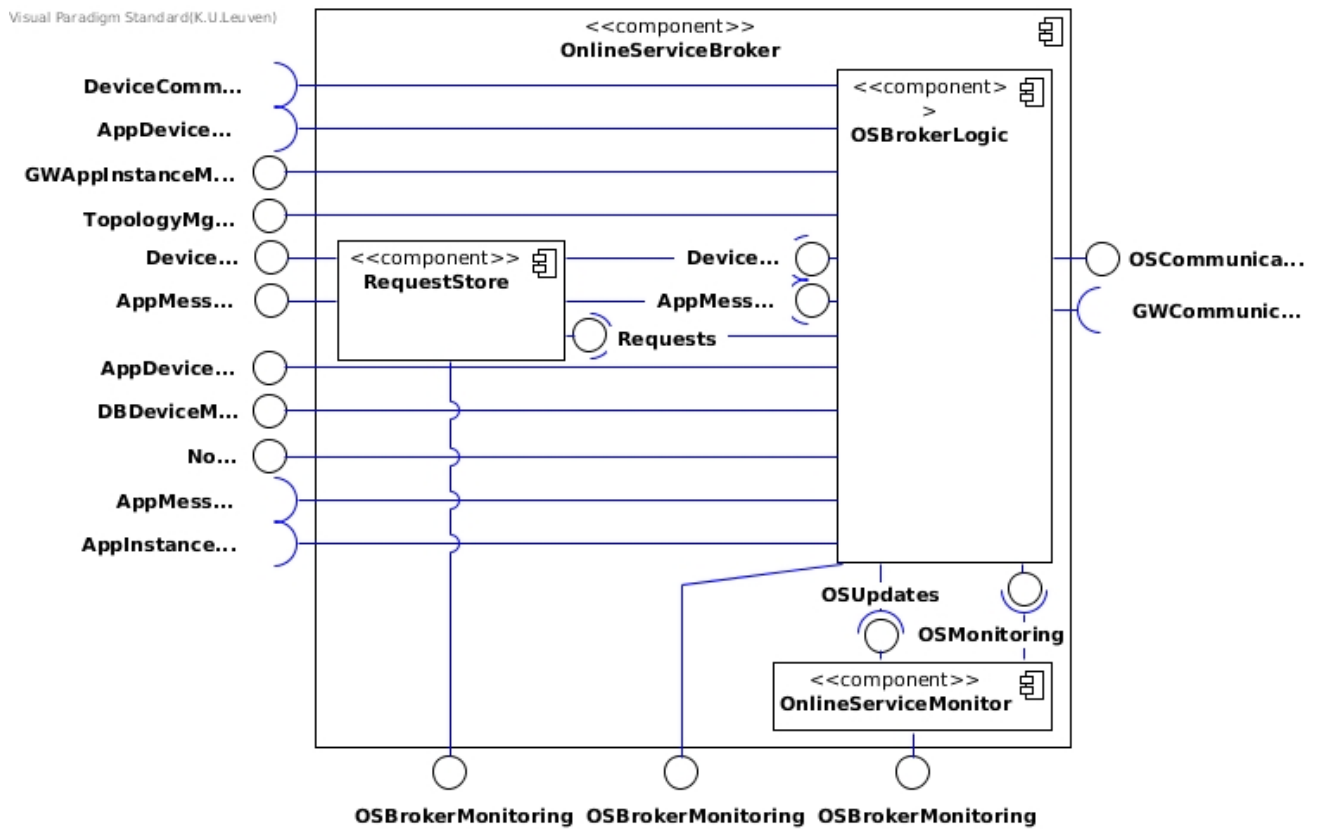


Figure 3.4: Decomposition of **OnlineServiceBroker**.
 This caption contains a longer explanation over multiple lines. This additional explanation is not shown in the list of figures.

4. Deployment view (UML Deployment diagram)

Figures

4.1	Context diagram for the deployment view.	24
4.2	Primary diagram for the deployment view.	26

✓ **Hint:** No need to just repeat what we can see on the diagram.
Don't do this: *As you can see on fig. x: components A and B are deployed on node C.*
But, please do explain if there is anything non-trivial (e.g., a custom mapping from actors to external components on the context diagram).

✓ **Hint:** Add any essential information, necessary for interpreting the figure, in the caption. Be sure to add a separate short title for inclusion in the list of figures: `\caption[shorttitle]{longtitle}`.
If your explanation becomes too long for the caption, you can create a separate subsection. Don't forget to refer to the figure and vice versa.

▲ **Attention:** Connect nodes on the deployment diagram, *not* components.

▲ **Attention:** *Consistency between views!* Be sure to check for consistency between the client-server/decomposition view and your deployment view.

4.1 Context diagram

The context diagram for the deployment view is displayed in figure 4.1.

Components X, Y, Z are deployed on multiple nodes for bla bla bla.
Components A and B communicate using the C protocol...

📄 **TODO:** Describe the context diagram for the deployment view. For example, which protocols are used for communication with external systems and why?

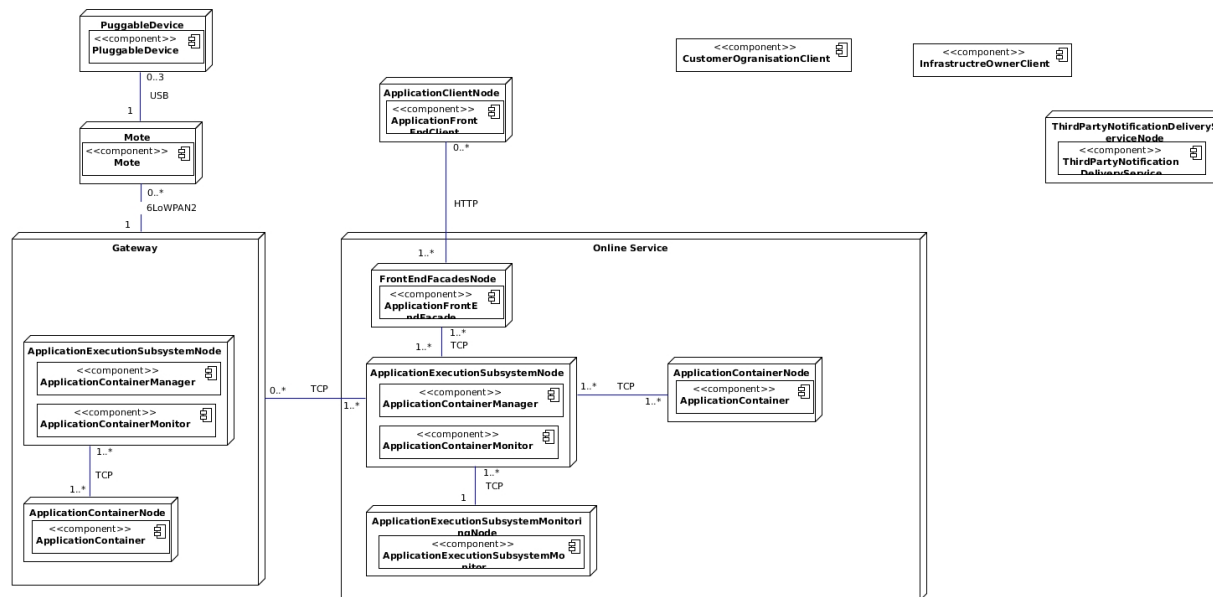



Figure 4.1: Context diagram for the deployment view.

4.2 Primary diagram

The primary diagram for the deployment view is displayed in figure 4.2.

TODO: add references to "architectural decisions" where we made some choices related to deployment of components.

 **TODO:** The primary deployment diagram itself. This discussion on the parts of the deployment diagram which are crucial for achieving certain non-functional requirements, and any alternative deployments that you considered, should be in the architectural decisions chapter.

No online service node here, because the primary diagram represents the whole online service.

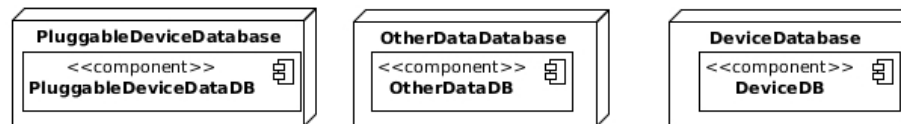
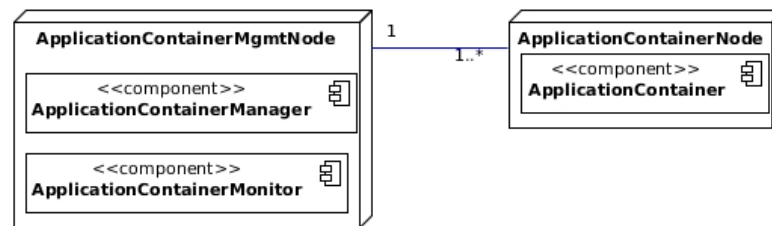


Figure 4.2: Primary diagram for the deployment view.

5. Scenarios

Figures

5.1	Sensor data being processed by the system	28
5.2	Subscribing to an application	29
5.3	Applications issuing actuation commands	30
5.4	Scenario	31
5.5	Application crash	32
5.6	Plugging in a new pluggable device (sensor or actuator)	33
5.7	Detection and handling of communication channel failure	34
5.8	Upgrading an application	35
5.9	Sending actuation commands via a mobile app	36

✓ **Hint:** No need to just repeat what we can see on the diagram.
Don't do this: *As you can see on fig. x: component A calls operation b, next component C calls operation d.*
But, please do explain if there is anything non-trivial (e.g., a custom mapping from actors to external components on the context diagram).

✓ **Hint:** Add any essential information, necessary for interpreting the figure, in the caption. Be sure to add a separate short title for inclusion in the list of figures: `\caption[shorttitle]{longtitle}`.
If your explanation becomes too long for the caption, you can create a separate subsection. Don't forget to refer to the figure and vice versa.

▲ **Attention:** Do include a list of which sequence diagrams together illustrate a which scenario from the assignment.

✓ **Hint:** Don't only model the 'happy path' in your sequence diagrams. Take into account the quality attributes. For example, what happens when a certain component fails (Av) or overloads (P)? Use the sequence diagrams to illustrate how you have achieved the qualities in your architecture.

5.1 Scenarios

📌 **TODO:** Illustrate how your architecture fulfills the most important data flows. As a rule of thumb, focus on the scenario of the assignment. Describe the scenario in terms of architectural components using UML Sequence diagrams and further explain the most important interactions in text. Illustrating the scenarios serves as a quick validation of the completeness of your architecture. If you notice at this point that for some reason, certain functionality or qualities are not addressed sufficiently in your architecture, it suffices to document this, together with a rationale of why this is the case according to you. You do not have to further refine your architecture at this point.

This section lists which sequence diagrams belong to which scenarios:

- UC11: Sensor data being processed by the system
Figure 5.1
- UC19: Subscribing to an application
Figure 5.2
- UC12: Applications issuing actuation commands
Figure 5.3
- UC14, Av3, UC18: Sensors/actuators failing
Figure 5.4
This scenario displays the data flow when sensors/actuators fail, causing

- deactivation of specific applications
- a redundant sensor/actuator to take over in the context of a single application
- Av2: Application crash
Figure 5.5
- U2, UC4: Plugging in a new pluggable device (sensor or actuator)
Figure 5.6
- Av1, UC15: Detection and handling of communication channel failure
Figure 5.7
- UC22, U1: Upgrading an application
Figure 5.8
- UC26, UC27, UC12: Sending actuation commands via a mobile app
Figure 5.9

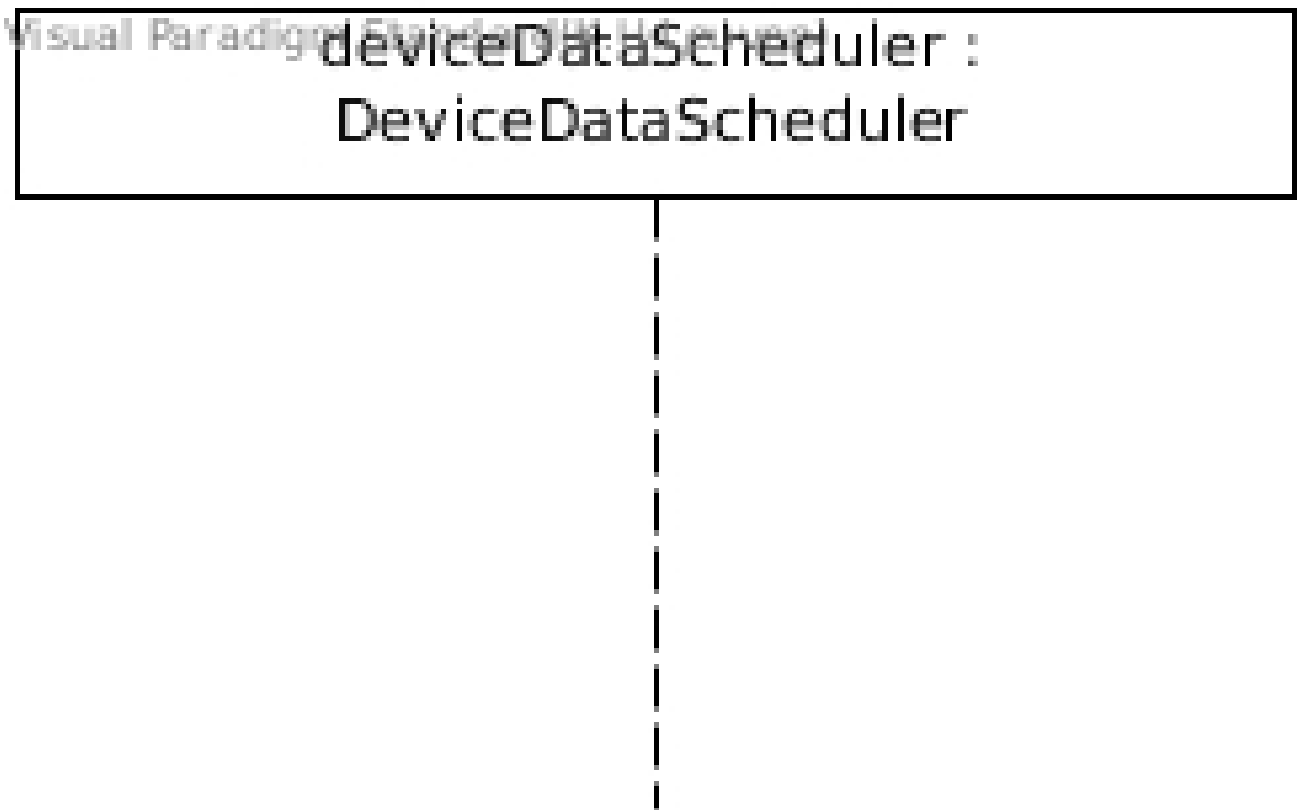


Figure 5.1: EXPLAIN WHAT HAPPENS IN THE SCENARIO.
ADD COMMENTS.
LINK TO OTHER RELEVANT SCENARIO'S.

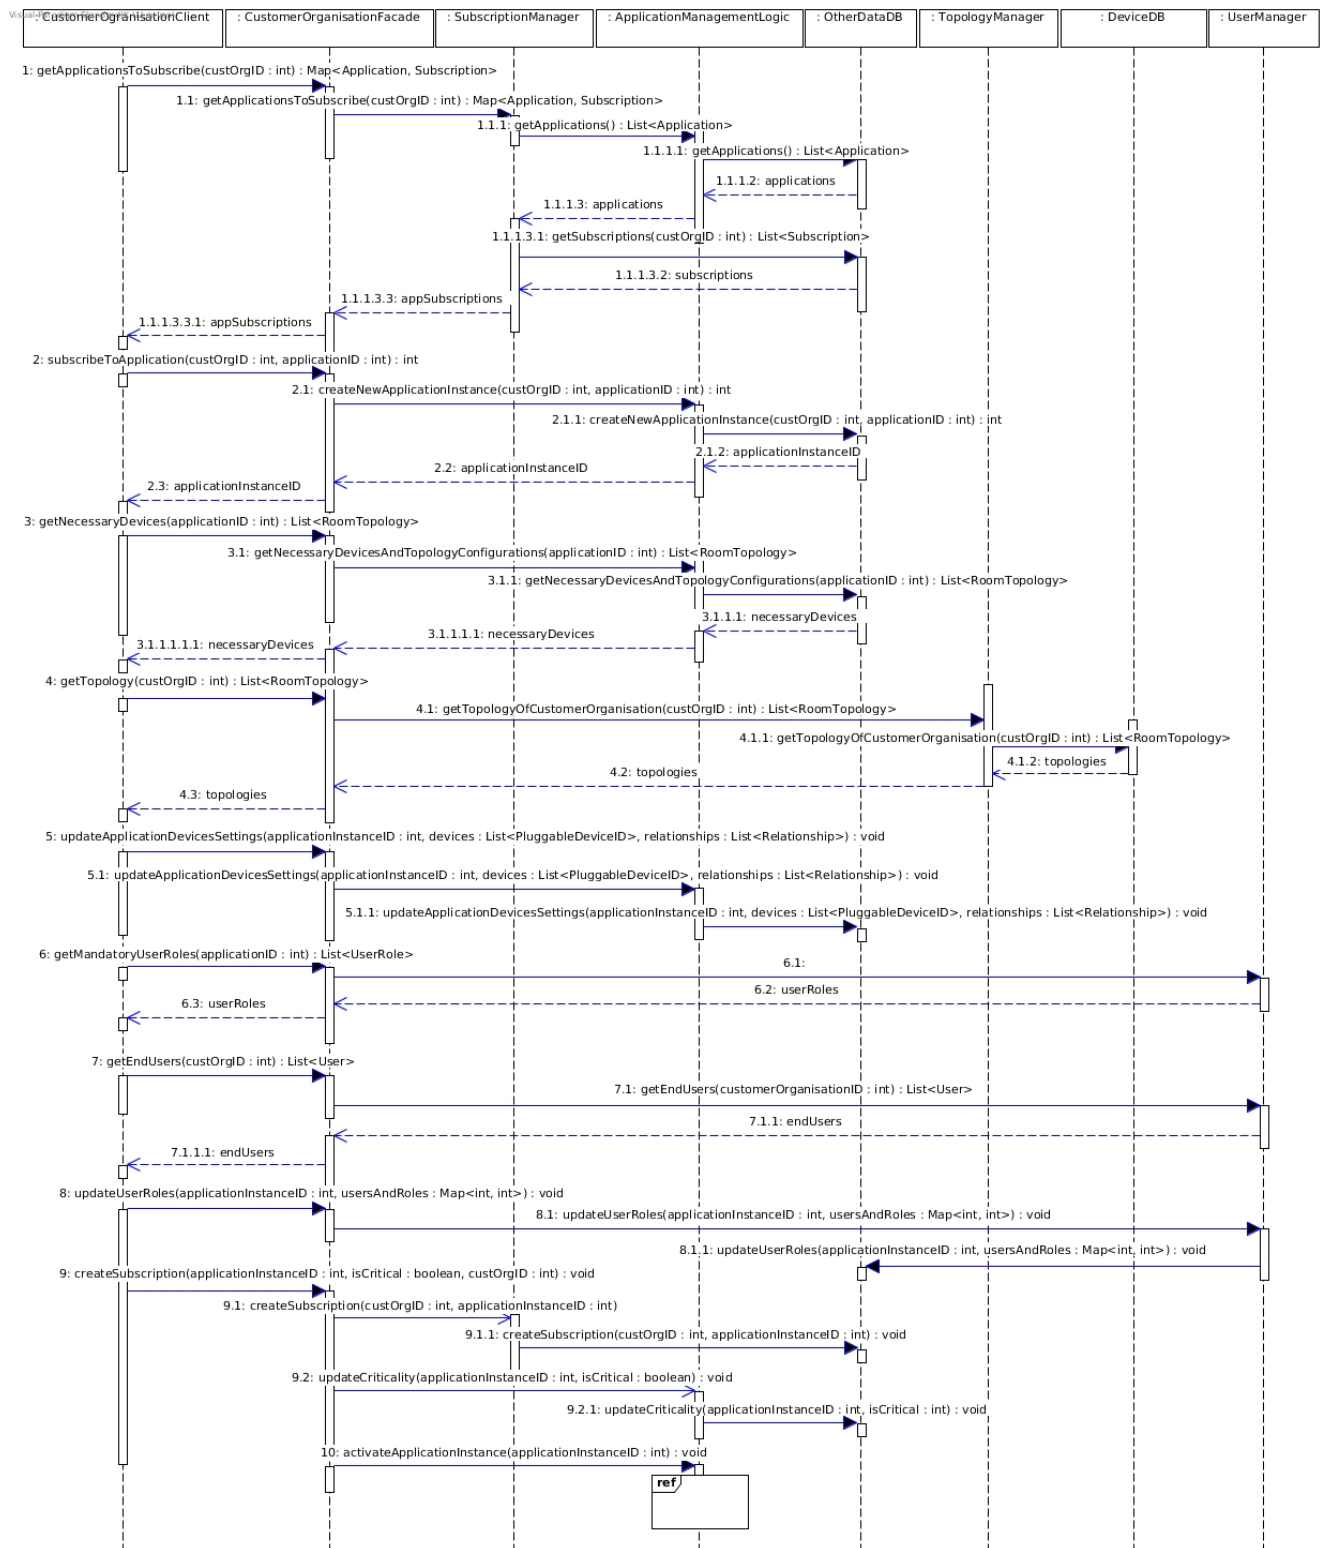


Figure 5.2: EXPLAIN WHAT HAPPENS IN THE SCENARIO.
 ADD COMMENTS.
 LINK TO OTHER RELEVANT SCENARIO'S.



Figure 5.3: EXPLAIN WHAT HAPPENS IN THE SCENARIO.
ADD COMMENTS.
LINK TO OTHER RELEVANT SCENARIO'S.

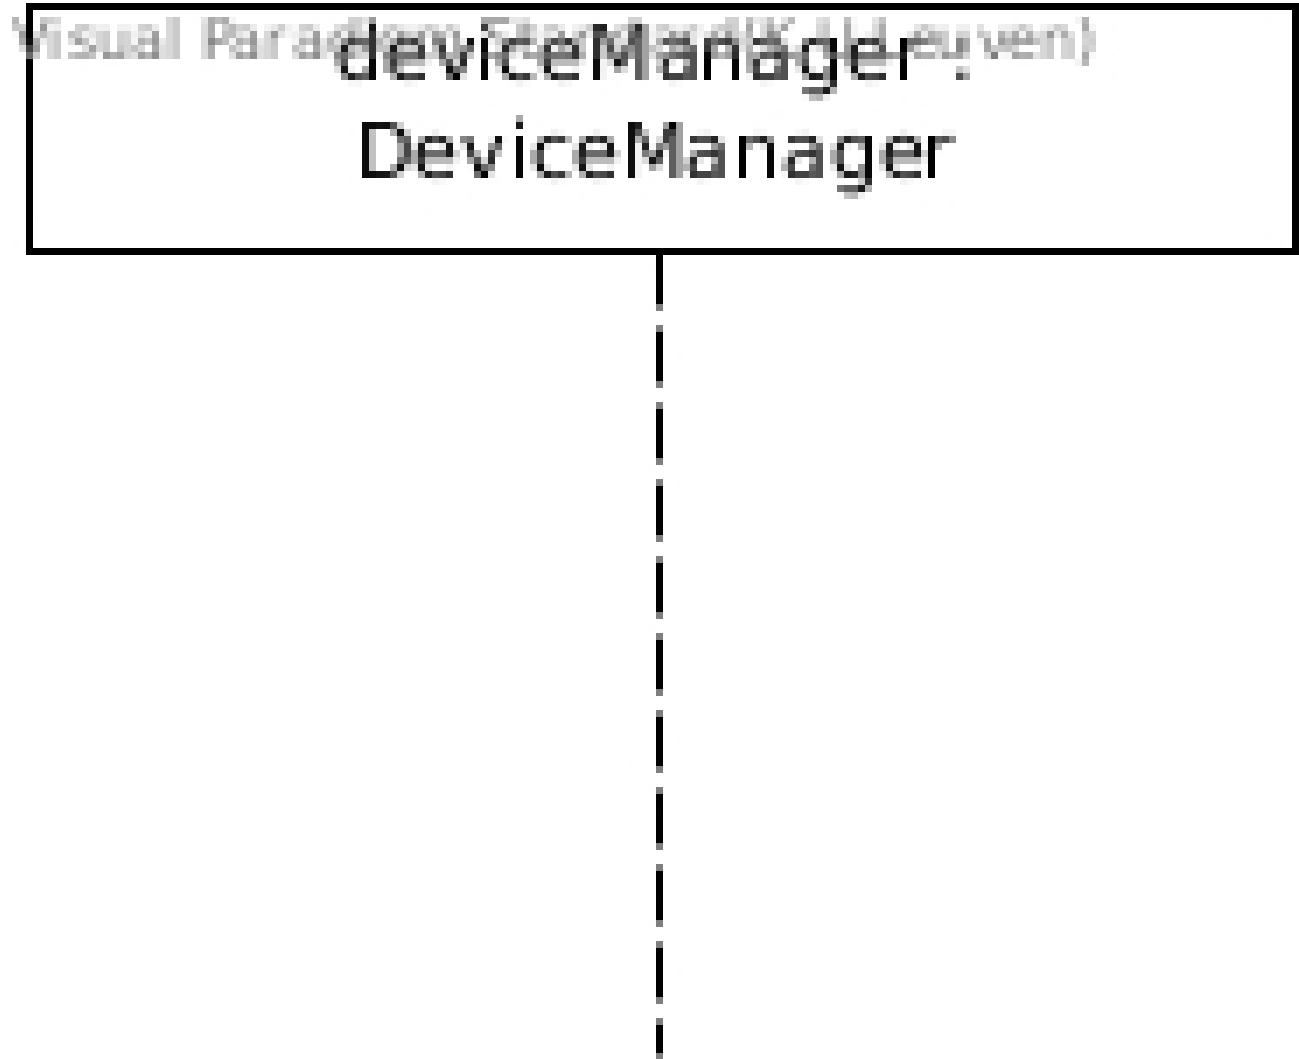


Figure 5.4: EXPLAIN WHAT HAPPENS IN THE SCENARIO.
ADD COMMENTS.
LINK TO OTHER RELEVANT SCENARIO'S.



Figure 5.5: EXPLAIN WHAT HAPPENS IN THE SCENARIO.
ADD COMMENTS.
LINK TO OTHER RELEVANT SCENARIO'S.

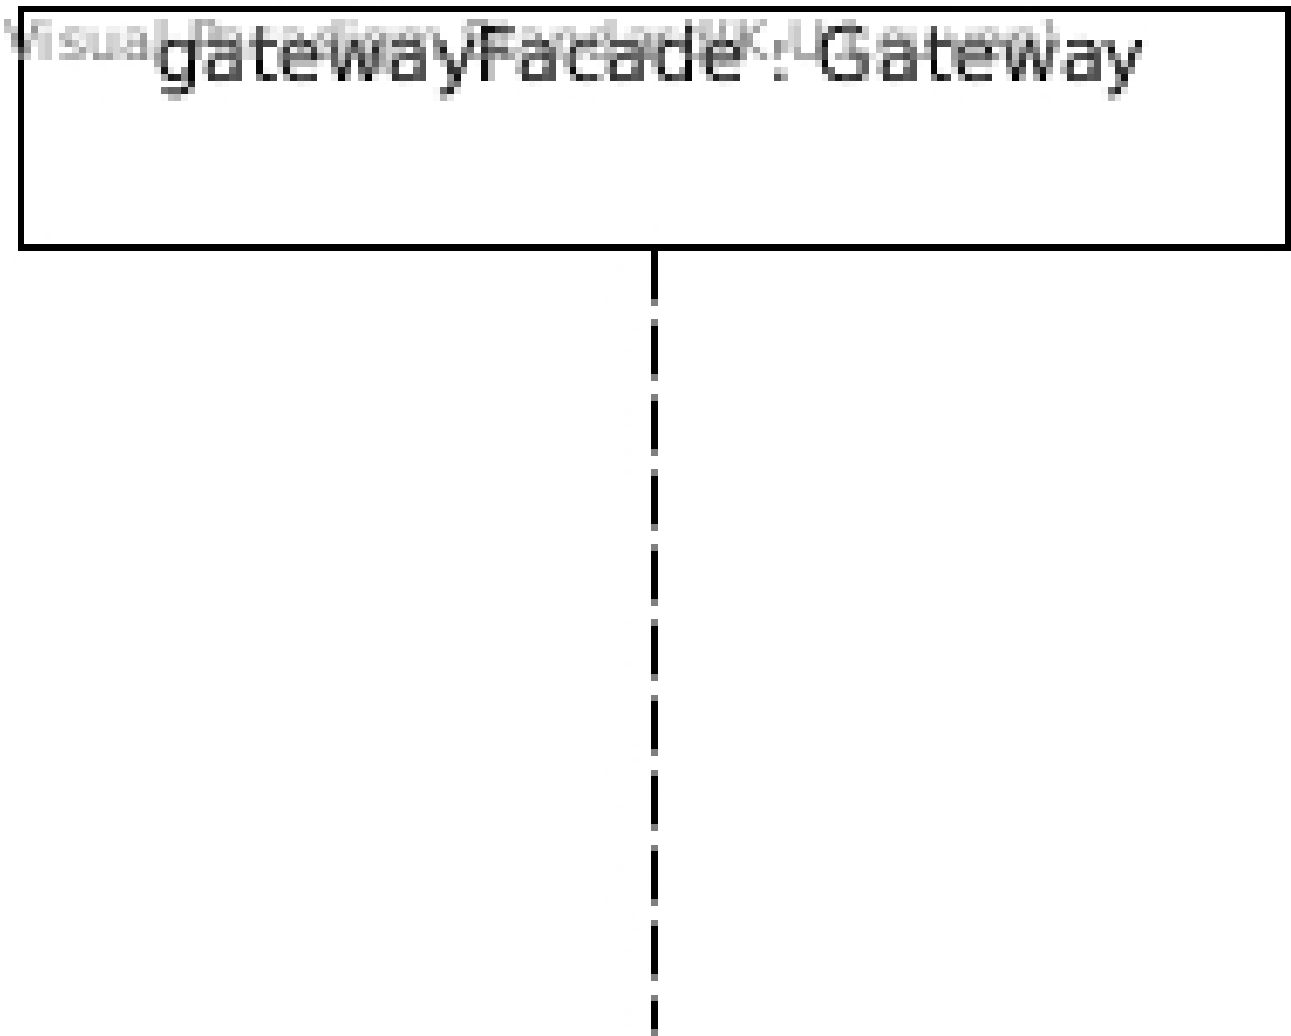


Figure 5.6: EXPLAIN WHAT HAPPENS IN THE SCENARIO.
ADD COMMENTS.
LINK TO OTHER RELEVANT SCENARIO'S.

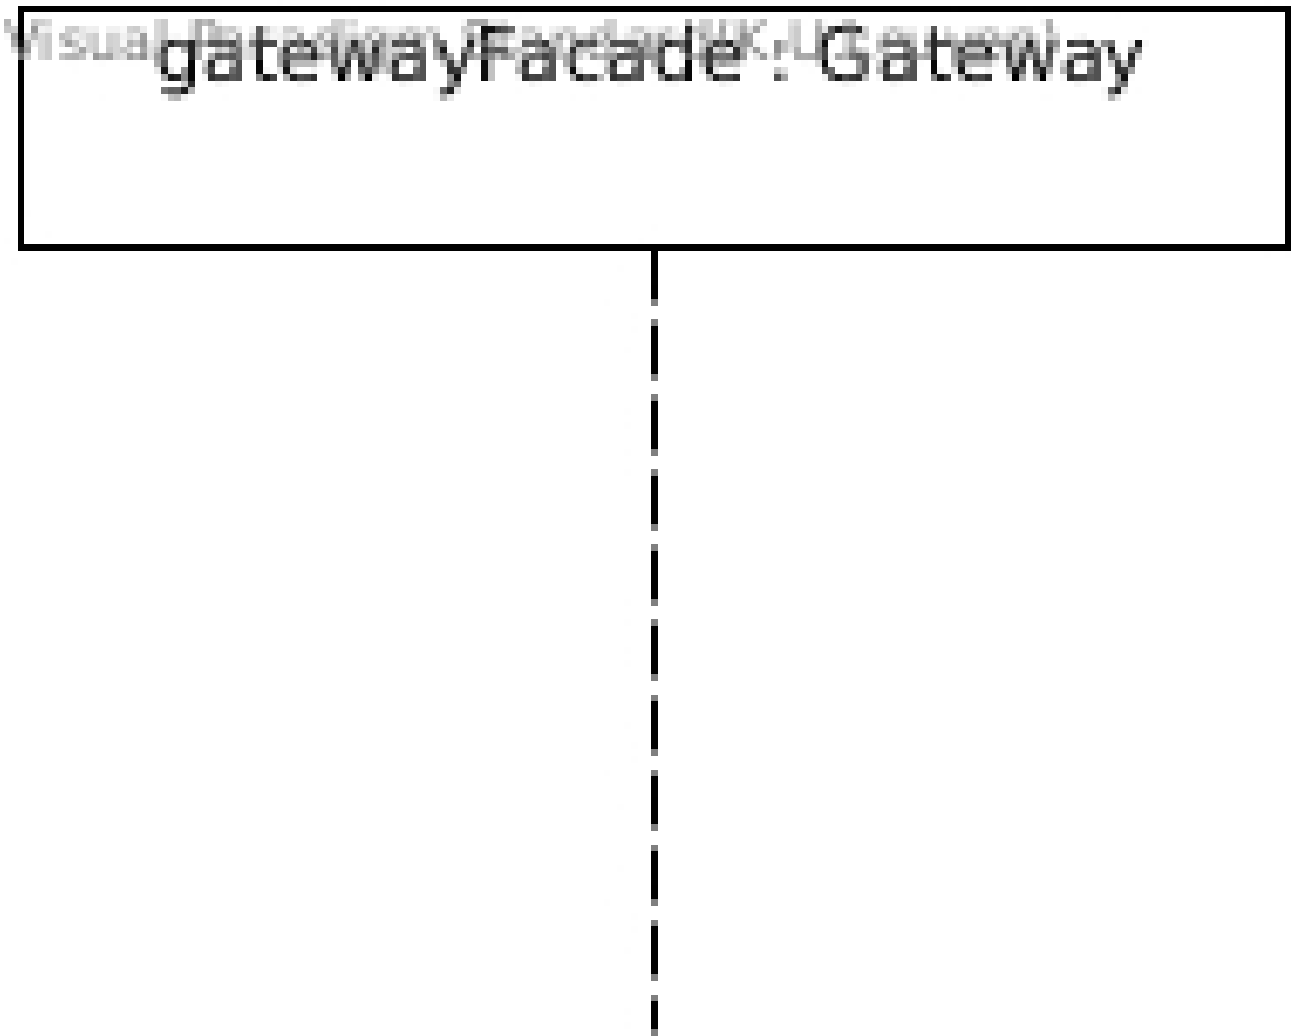


Figure 5.7: EXPLAIN WHAT HAPPENS IN THE SCENARIO.
ADD COMMENTS.
LINK TO OTHER RELEVANT SCENARIO'S.



Figure 5.8: EXPLAIN WHAT HAPPENS IN THE SCENARIO.
ADD COMMENTS.
LINK TO OTHER RELEVANT SCENARIO'S.



Figure 5.9: EXPLAIN WHAT HAPPENS IN THE SCENARIO.
ADD COMMENTS.
LINK TO OTHER RELEVANT SCENARIO'S.

6. Element Catalog and Datatypes

Each method contains a short note on why the method was added (under "Created for"). This was done to keep track of our decisions and does not mean that the methods can only be used for the Quality Attribute/Use Case referenced in the "Created for" note.

7. Catalog

7.1 Components

7.1.1 AccessRightsManager

Responsibility: Responsible for all functionality related to access rights to pluggable devices. E.g. retrieving the access rights a customer organisation has for a device, updating access rights for customer organisations, etc.

Super-components: None

Sub-components: None

Provided interfaces: \circ AccessRightsMgmt

Required interfaces: \prec DBAccessRightsMgmt

7.1.2 ApplicationContainer

Responsibility: This component contains a sandbox environment for an application instance to execute in. The container itself can detect when applications crash. In that case, the container tries to restart the application up to 3 times. If the application continues to crash, it is suspended and the ContainerMonitor is notified.

Super-components: \boxplus ApplicationManager

Sub-components: \boxplus ApplicationInstance, \boxplus ContainerLogic

Provided interfaces: \circ AppInstanceMgmt, \circ AppMessages, \circ AppMonitoring

Required interfaces: \prec AppDeviceData, \prec AppMessages, \prec AppStatus, \prec DataConversion, \prec DeviceCommands

7.1.3 ApplicationContainerManager

Responsibility: Responsible for management of ApplicationContainers. E.g. creation, suspending containers, forwarding data to containers, etc. All communication that is destined to ApplicationContainers goes through here first, since the ApplicationContainerManager knows where exactly ApplicationContainers are deployed.

Super-components: \boxplus ApplicationManager

Sub-components: None

Provided interfaces: \circ AppDeviceData, \circ AppInstanceMgmt, \circ AppMessages, \circ AppMonitoring, \circ Commands, \circ DeviceCommands, \circ Monitoring

Required interfaces: \prec AppDeviceData, \prec AppInstanceMgmt, \prec AppMessages, \prec AppMonitoring, \prec AppStatus, \prec Commands, \prec Notify

7.1.4 ApplicationContainerMonitor

Responsibility: Monitors ApplicationContainers and keeps track of their ApplicationInstances.

Super-components: \boxplus ApplicationManager

Sub-components: None

Provided interfaces: \circ AppStatus, \circ Monitoring

Required interfaces: \prec AppMonitoring, \prec Notify

7.1.5 ApplicationExecutionSubsystemMonitor

Responsibility: Monitors the application execution subsystem (ApplicationContainerManager, ApplicationContainerMonitor)

Super-components: \boxplus ApplicationManager

Sub-components: None

Provided interfaces: None

Required interfaces: < Monitoring, < Notifiy

7.1.6 ApplicationFrontEndClient

Responsibility: Represents the front end client a an application.

Super-components: None

Sub-components: None

Provided interfaces: None

Required interfaces: < AppDeviceData, < DeviceCommands

7.1.7 ApplicationFrontEndFacade

Responsibility: Acts as an access point for ApplicationClients and handles all functionality that can be done by application's external front ends.

Super-components: None

Sub-components: None

Provided interfaces: ∅ AppDeviceData, ∅ DeviceCommands

Required interfaces: < AppDeviceData, < DeviceCommands

7.1.8 ApplicationInstance

Responsibility: Represents an application instance running in the system.

Super-components: [ApplicationManager ▷ ApplicationContainer

Sub-components: None

Provided interfaces: ∅ AppMessages, ∅ AppMonitoring

Required interfaces: < AppDeviceData, < AppMessages, < DataConversion, < DeviceCommands

7.1.9 ApplicationManagementLogic

Responsibility: The entry point for ApplicationManager. Responsible for tying together all components of the ApplicationManager and handling requests related to applications.

Super-components: [ApplicationManager

Sub-components: None

Provided interfaces: ∅ AppDeviceData, ∅ AppMessages, ∅ DeviceCommands, ∅ ForwardData, ∅ FrontEndAppRequests, ∅ GWAppInstanceMgmt

Required interfaces: < AppDeviceMgmt, < AppInstanceMgmt, < AppMessages, < Commands, < DBAppMgmt, < InvoiceMgmt, < Notifiy, < RequestData, < RoleMgmt, < TopologyMgmt

7.1.10 ApplicationManager

Responsibility: Responsible for all functionality related to applications and application instances. e.g. activating/deactivating application instances, updating an ApplicationInstance's pluggable device redundancy relationships, etc.

Super-components: None

Sub-components: [DeviceCommandConstructor, [ApplicationContainerMonitor, [ApplicationContainerManager, [ApplicationManagementLogic, [ApplicationExecutionSubsystemMonitor, [DeviceDataConverter, [ApplicationContainer

Provided interfaces: ∅ AppDeviceData, ∅ AppMessages, ∅ DeviceCommands, ∅ ForwardData, ∅ FrontEndAppRequests, ∅ GWAppInstanceMgmt

Required interfaces: < AppDeviceMgmt, < AppInstanceMgmt, < AppMessages, < DBAppDeviceMgmt, < DBAppMgmt, < DeviceCommands, < InvoiceMgmt, < Notifiy, < RequestData, < RoleMgmt, < TopologyMgmt

7.1.11 ApplicationProviderClient

Responsibility: Undefined

Super-components: None

Sub-components: None

Provided interfaces: None

Required interfaces: None

7.1.12 ApplicationProviderFacade

Responsibility: Undefined

Super-components: None

Sub-components: None

Provided interfaces: ◌ Authentication, ◌ Notifications

Required interfaces: ◌ Authentication, ◌ Notifications

7.1.13 AuthenticationManager

Responsibility: Undefined

Super-components: None

Sub-components: None

Provided interfaces: ◌ Authentication

Required interfaces: ◌ Authentication, ◌ Sessions

7.1.14 ContainerLogic

Responsibility: The logic of an ApplicationContainer. Handles communication from/to ApplicationInstances and can maintain/monitor them.

Super-components: ◻ ApplicationManager ▷ ◻ ApplicationContainer

Sub-components: None

Provided interfaces: ◌ AppDeviceData, ◌ AppMessages, ◌ DataConversion, ◌ DeviceCommands

Required interfaces: ◌ AppMessages, ◌ AppMonitoring

7.1.15 CustomerOrganisationClient

Responsibility: Represents the client used by a customer organisation. This is the user's dashboard.

Super-components: None

Sub-components: None

Provided interfaces: None

Required interfaces: ◌ SubscriptionMgmt

7.1.16 CustomerOrganisationFacade

Responsibility: Acts as an access point for CustomerOrganisationClients and handles all functionality that can be done by customer organisations.

Super-components: None


Sub-components: None

Provided interfaces: ◌ Authentication, ◌ Notifications, ◌ SubscriptionMgmt, ◌ UserMgmt

Required interfaces: ◌ Authentication, ◌ FrontEndAppRequests, ◌ Notifications, ◌ RoleMgmt, ◌ SubscriptionMgmt, ◌ TopologyMgmt, ◌ UserMgmt

7.1.17 DeviceCommandConstructor

Responsibility: Is responsible for verifying, constructing, and sending commands from applications for pluggable devices. On the Online Service, It fetches data about pluggable devices from the DeviceDB. On a Gateway, it must be configured to fetch that data from the DeviceManager.

Super-components:  ApplicationManager


Sub-components: None

Provided interfaces:  Commands


Required interfaces:  DBAppDeviceMgmt,  DeviceCommands

7.1.18 DeviceDataConverter

Responsibility: The DeviceDataConverter is responsible for conversions pluggable device data for applications. There is one in the Online Service for application instances running in the Online Service and one in Gateways for application instances running on gateways.

Super-components:  ApplicationManager

Sub-components: None

Provided interfaces:  DataConversion

Required interfaces: None

7.1.19 DeviceDataScheduler

Responsibility: Responsible for scheduling incoming read and write requests for pluggable device data. Monitors throughput of requests and switches between normal and overload mode when appropriate. Avoids starvation of any type of request.

Super-components: None

Sub-components: None

Provided interfaces:  DeviceData,  RequestData






Required interfaces:  DBDeviceData,  ForwardData

7.1.20 DeviceDB

Responsibility: Contains all information related to devices in the system, but not pluggable device data such as sensor data or actuation statuses. The data includes information about pluggable devices, motes, gateways, topologies, access rights, etc.

Super-components: None

Sub-components: None


Provided interfaces:  DBAccessRightsMgmt,  DBAppDeviceMgmt,  DBDeviceMgmt,  DBIODeviceMgmt,  DBTopologyMgmt

Required interfaces: None

7.1.21 DeviceManager










Responsibility: Monitors connected/operational devices on a gateway. Sends notifications in case of hardware failure. Can send a command to disable or reactivate applications when necessary.

Keeps a local cache of data about pluggable devices from the DeviceDB, such as specific formatting syntax, possible configuration parameters, etc. This data can then be used by the DeviceCommandConstructor on the DeviceManager to convert commands from ApplicationContainers on the gateway before they are sent to pluggable devices.

Super-components:  Gateway

Sub-components: None

Provided interfaces:  AppDeviceMgmt,  DeviceCommands,  DeviceData,  DeviceMgmt,  Heartbeat

Required interfaces:  Actuate,  AppInstanceMgmt,  Config,  DBDeviceMgmt,  DeviceData,  GWAppInstanceMgmt,  Notifiy,  RequestData,  TopologyMgmt

7.1.22 Gateway

Responsibility: Represents a SIO TIP gateway.

Super-components: None

Sub-components: `DeviceManager`, `OnlineServiceBrokerMonitor`, `OnlineServiceBroker`

Provided interfaces: `DeviceData`, `DeviceMgmt`, `Heartbeat`, `OSCommunication`

Required interfaces: `Actuate`, `Config`, `GWCommunication`, `RequestData`

7.1.23 GatewayBroker

Responsibility: Isolates communication-related concerns between the Online Service Gateways and along with `OnlineServiceBroker` on Gateways. Forwards requests from one party to the other and transmits results and possible exceptions.

Sends acknowledgements for all messages sent by Gateways so that they can detect failures.

Super-components: None

Sub-components: `GWBrokerLogic`, `GatewayMonitor`

Provided interfaces: `AppDeviceMgmt`, `AppInstanceMgmt`, `AppMessages`, `DeviceCommands`, `GWBrokerMonitoring`, `GWCommunication`

Required interfaces: `AppDeviceData`, `AppMessages`, `DBDeviceMgmt`, `DeviceData`, `GWAppInstanceMgmt`, `Notify`, `OSCommunication`, `TopologyMgmt`

7.1.24 GatewayBrokerMonitor

Responsibility: Monitors the communication component on the Online Service for communication with Gateways on the Online Service. Notifies SIO TIP system administrators in case of failures.

Super-components: None

Sub-components: None

Provided interfaces: None

Required interfaces: `DBDeviceMgmt`, `GWBrokerMonitoring`, `Notify`

7.1.25 GatewayMonitor

Responsibility: Monitors the connectivity status of all gateways. Can detect that a gateway is not sending data anymore based on the expected synchronisation interval. If 3 consecutive expected synchronisations do not arrive within 1 minute of their expected arrival time, this is detected as a gateway outage.

When outages of gateways are detected, the infrastructure owners that own the gateways and a SIO TIP system administrator are notified.

When the connectivity status change of a `Gateway` is detected, this is saved in the `DeviceDB`.

Quick math to check we are not doing something very dumb here: $5000 \text{ gateways} * (32 \text{ bit gatewayID} + 4 \text{ bit countSynchronisationsMissed} + 64 \text{ bit lastSyncPeriod} + 64 \text{ bit nextSyncPeriod}) == \text{approx } 100\text{kb} \Rightarrow \text{Seems ok}$

Super-components: `GatewayBroker`

Sub-components: None

Provided interfaces: `GatewayUpdates`, `GWBrokerMonitoring`

Required interfaces: `DBDeviceMgmt`, `Notify`

7.1.26 GWBrokerLogic

Responsibility: Handles all actual functionality related to communication. When Gateways synchronise with the Online Service, this component notifies the `GatewayMonitor` so that it can keep track of Gateway's status.

Super-components: `GatewayBroker`

Sub-components: None

Provided interfaces: ⊖ AppDeviceMgmt, ⊖ AppInstanceMgmt, ⊖ AppMessages, ⊖ DBDeviceMgmt,
 ⊖ DeviceCommands, ⊖ GWBrokerMonitoring, ⊖ GWCommunication, ⊖ Notifiy
Required interfaces: ⊥ AppDeviceData, ⊥ AppMessages, ⊥ DBDeviceMgmt, ⊥ DeviceData, ⊥ GatewayUpdates,
 ⊥ GWAppInstanceMgmt, ⊥ Notifiy, ⊥ OSCommunication, ⊥ TopologyMgmt

7.1.27 InfrastructreOwnerClient

Responsibility: Represents the client used by an infrastructure owner. This is the user's dashboard.
Super-components: None
Sub-components: None
Provided interfaces: None
Required interfaces: ⊥ AccessRights

7.1.28 InfrastructureOwnerFacade

Responsibility: Acts as an access point for InfrastructureOwnerClients and handles all functionality that
 can be done by infrastructure owners.
Super-components: None
Sub-components: None
Provided interfaces: ⊖ AccessRights, ⊖ Authentication, ⊖ Notifications, ⊖ TopologyMgmt
Required interfaces: ⊥ AccessRightsMgmt, ⊥ Authentication, ⊥ FrontEndAppRequests, ⊥ IOMgmt,
 ⊥ Notifications, ⊥ TopologyMgmt

7.1.29 InfrastructureOwnerManager

Responsibility: Responsible for all functionality related to infrastructure owners. E.g. looking up the
 devices they own, retrieving a list of customer organisations that they are associated to, etc.
Super-components: None
Sub-components: None
Provided interfaces: ⊖ IOMgmt
Required interfaces: ⊥ AppDeviceMgmt, ⊥ DBIOMgmt, ⊥ DBIOMgmt

7.1.30 InvoiceManager

Responsibility: Responsible for all functionality related to access rights to invoicing. E.g. creating
 invoices.
Super-components: None
Sub-components: None
Provided interfaces: ⊖ DeliveryMgmt, ⊖ InvoiceMgmt
Required interfaces: ⊥ DBInvoiceMgmt, ⊥ InvoiceDeliveryMgmt

7.1.31 Mote

Responsibility: Represents a MicroPnP mote.
Super-components: None
Sub-components: None
Provided interfaces: ⊖ Actuate, ⊖ Config, ⊖ DeviceData, ⊖ RequestData
Required interfaces: ⊥ Actuate, ⊥ Config, ⊥ DeviceData, ⊥ DeviceMgmt, ⊥ Heartbeat, ⊥ RequestData

7.1.32 NotificationHandler

Responsibility: Responsible for generation, storage, and delivery of notifications based on users' preferred
 communication channel.
Super-components: None

Sub-components: None

Provided interfaces: ◌ DeliveryMgmt, ◌ Notifications, ◌ Notifiy

Required interfaces: ◌ DBNotificationMgmt, ◌ NotificationDeliveryMgmt

7.1.33 OnlineServiceBroker

Responsibility: Isolates communication-related concerns between Gateways and the Online Service along with GatewayBroker on the Online Service. Forwards requests from one party to the other and transmits results and possible exceptions.

Keeps track of reachability status of the Online Service.

Can store at least 3 days of pluggable data and application commands before old data has to be overwritten.

Super-components: ◻ Gateway

Sub-components: ◻ OSBrokerLogic, ◻ OnlineServiceMonitor, ◻ RequestStore

Provided interfaces: ◌ AppDeviceData, ◌ AppMessages, ◌ DBDeviceMgmt, ◌ DeviceData, ◌ GWAppInstanceMgmt, ◌ Notifiy, ◌ OSBrokerMonitoring, ◌ OSCommunication, ◌ TopologyMgmt

Required interfaces: ◌ AppDeviceMgmt, ◌ AppInstanceMgmt, ◌ AppMessages, ◌ DeviceCommands, ◌ GWCommunication

7.1.34 OnlineServiceBrokerMonitor

Responsibility: Monitors the communication component on Gateways. If the communication component fails, the monitor tries to restart it. If the failure persists, makes the gateway reboots itself entirely.

Super-components: ◻ Gateway

Sub-components: None

Provided interfaces: None

Required interfaces: ◌ OSBrokerMonitoring

7.1.35 OnlineServiceMonitor

Responsibility: Monitors the Gateway's connectivity to the Online Service.

If the Online Service or the communication channel has failed, all requests to the Online Service will be stopped and stay stored in the RequestStore. An explicit command for this is not necessary, because the requests in the RequestStore will not be deleted, since no acknowledgements are received anymore from the Online Service.

After the monitor detects that a connection to the Online Service is possible again, it makes the gateway start synchronising again.

When the Online Service is unreachable, application parts running locally on the SIIoTIP gateway continue to operate normally.

Super-components: ◻ OnlineServiceBroker ▷ ◻ Gateway

Sub-components: None

Provided interfaces: ◌ OSBrokerMonitoring, ◌ OSUpdates

Required interfaces: ◌ OSMonitoring

7.1.36 OSBrokerLogic

Responsibility: Handles all actual functionality related to communication. When a message comes in from the Online Service, lets the OnlineServiceMonitor know that a message has been received. When an acknowledgements for requests are received from the Online Service, notifies the RequestStore of this so that it can delete the request from its storage.

Super-components: ◻ OnlineServiceBroker ▷ ◻ Gateway

Sub-components: None

Provided interfaces: ⊖ AppDeviceData, ⊖ AppMessages, ⊖ DBDeviceMgmt, ⊖ DeviceData,
 ⊖ GWAppInstanceMgmt, ⊖ Notifiy, ⊖ OSBrokerMonitoring, ⊖ OSCommunication, ⊖ OSMonitoring,
 ⊖ TopologyMgmt
Required interfaces: < AppDeviceMgmt, < AppInstanceMgmt, < AppMessages, < DeviceCommands,
 < GWCommunication, < OSUpdates, < Requests

7.1.37 OtherDataDB

Responsibility: General database for data. For example, storage of data about notifications.
Super-components: None
Sub-components: None
Provided interfaces: ⊖ Authentication, ⊖ DBAppMgmt, ⊖ DBInvoiceMgmt, ⊖ DBIOMgmt, ⊖ DBNotificationMgmt,
 ⊖ DBSubscriptionMgmt, ⊖ DBUserMgmt
Required interfaces: None

7.1.38 PluggableDevice

Responsibility: Represents a pluggable device that plugs into MicroPnP motes. Can be a sensor or an actuator.
 Sensors produce measurements and send them to the a gateway via a MicroPnP mote.
 Actuators have one or more actions associated with them. For example, a switch can "turn on" and "turn off".
Super-components: None
Sub-components: None
Provided interfaces: ⊖ Actuate, ⊖ Config, ⊖ RequestData
Required interfaces: < DeviceData

7.1.39 PluggableDeviceDataDB

Responsibility: Database dedicated to pluggable device data only.
Super-components: None
Sub-components: None
Provided interfaces: ⊖ DBDeviceData
Required interfaces: None

7.1.40 RegisteredUserFacade

Responsibility: Undefined
Super-components: None
Sub-components: None
Provided interfaces: ⊖ Authentication, ⊖ Notifications
Required interfaces: < Authentication, < Notifications

7.1.41 RequestStore

Responsibility: Temporarily stores all pluggable data and issued application commands until they can be deleted (= until an acknowledgement has been received for the request by the Online Service). Passes all requests along to the BrokerLogic and includes a unique requestID in them, so that the Online Service can send an acknowledgement for those messages. Can store at least 3 days of pluggable data before old data has to be overwritten.
Super-components: ⌘ OnlineServiceBroker ▷ ⌘ Gateway
Sub-components: None
Provided interfaces: ⊖ AppMessages, ⊖ DeviceData, ⊖ OSBrokerMonitoring, ⊖ Requests
Required interfaces: < AppMessages, < DeviceData

7.1.42 SessionDB

Responsibility: Undefined
Super-components: None
Sub-components: None
Provided interfaces: ∅ Sessions
Required interfaces: None

7.1.43 SubscriptionManager

Responsibility: Responsible for all functionality related to access rights to subscriptions. E.g. retrieving the applications that a customer organisation can subscribe to, creating new subscriptions to ApplicationInstances, etc.
Super-components: None
Sub-components: None
Provided interfaces: ∅ SubscriptionMgmt
Required interfaces: < DBSubscriptionMgmt, < FrontEndAppRequests, < InvoiceMgmt

7.1.44 SystemAdministratorFacade

Responsibility: Undefined
Super-components: None
Sub-components: None
Provided interfaces: ∅ Authentication, ∅ Notifications
Required interfaces: < Authentication, < Notifications

7.1.45 ThirdPartyInvoicingService

Responsibility: Undefined
Super-components: None
Sub-components: None
Provided interfaces: None
Required interfaces: None

7.1.46 ThirdPartyNotificationDeliveryService

Responsibility: Represents a third party notification delivery service.
Super-components: None
Sub-components: None
Provided interfaces: ∅ NotificationDeliveryMgmt
Required interfaces: < DeliveryMgmt

7.1.47 TopologyManager

Responsibility: Responsible for all functionality related to topology. E.g. Adding a new mote to the topology of an infrastructure, checking whether or not all devices used by an application are active in the topology, etc.
Super-components: None
Sub-components: None
Provided interfaces: ∅ TopologyMgmt
Required interfaces: < DBTopologyMgmt

7.1.48 UnregisteredUserClient

Responsibility: Undefined

Super-components: None

Sub-components: None

Provided interfaces: None

Required interfaces: None

7.1.49 UnregisteredUserFacade

Responsibility: Undefined

Super-components: None

Sub-components: None

Provided interfaces: ◌ Registration

Required interfaces: ◌ UserMgmt

7.1.50 UserManager

Responsibility: Responsible for all functionality related to users and UserRoles. E.g. registering a new end user for a customer organisation, retrieving the user roles that are mandatory for a certain application, etc.

Super-components: None

Sub-components: None

Provided interfaces: ◌ RoleMgmt, ◌ UserMgmt

Required interfaces: ◌ DBUserMgmt

7.2 Interfaces

7.2.1 AccessRights

Provided by: ⓘ InfrastructureOwnerFacade

Required by: ⓘ InfrastructureOwnerClient

Operations:

- configureDevice(**PluggableDeviceID** plD)
 - Effect: Returns a map of AccessRights and the IDs of customer organisations that have those AccessRights.
 - Created for: UC9.3 - UC9.4
- List<**PluggableDeviceInfo**> getAccessRights(int infrastructureOwnerID)
 - Effect: Returns a list of PluggableDeviceInfo to display so an infrastructure owner can select a device to configure access rights.
 - Created for: UC9.1
- void updateAccessRights()
 - Effect: Updates the access rights on a certain pluggable device for a group of customer organisations.
 - Created for: UC9.6

7.2.2 AccessRightsMgmt

Provided by: ⓘ AccessRightsManager

Required by: ⓘ InfrastructureOwnerFacade

Operations:

- getCustomerOrganisationsRights(**PluggableDeviceID** plD, List<int> custOrgIDs)
 - Effect: Returns a map of AccessRights and the IDs of customer organisations that have those AccessRights on a certain pluggable device.
 - Created for: UC9.4

- void updateAccessRights()
 - Effect: Updates the access rights on a certain pluggable device for a group of customer organisations.
 - Created for: UC9.7

7.2.3 Actuate

Provided by: [PluggableDevice](#)

Required by: [Mote](#)

Operations:

- void sendActuationCommand(string commandName)
 - Effect: Send an actuation command to the actuator. Sending an unknown actuation command has no effect.

7.2.4 Actuate

Provided by: [Mote](#)

Required by: [DeviceManager](#), [Gateway](#)

Operations:

- void sendActuationCommand(**PluggableDeviceID** plID, string commandName)
 - Effect: Send an actuation command to an actuator. Sending an unknown actuation command has no effect.

7.2.5 AppDeviceData

Provided by: [ApplicationContainerManager](#), [ApplicationFrontEndFacade](#), [ApplicationManagementLogic](#), [ApplicationManager](#), [ContainerLogic](#), [OSBrokerLogic](#), [OnlineServiceBroker](#)

Required by: [ApplicationContainer](#), [ApplicationContainerManager](#), [ApplicationFrontEndClient](#), [ApplicationFrontEndFacade](#), [ApplicationInstance](#), [GWBrokerLogic](#), [GatewayBroker](#)

Operations:

- Map<**PluggableDeviceID**, List<**DeviceData**>> getDataForDevices(List<**PluggableDeviceID**> devices, **Date-Time** from, **DateTime** to)
 - Effect: Returns DeviceData of pluggable devices over a specified time period.
 - Created for: UC24.1
- Map<**PluggableDeviceID**, List<**DeviceData**>> getDataForRoom(**RoomTopology** room, **DateTime** from, **Date-Time** to)
 - Effect: Returns DeviceData of pluggable devices in a room over a specified time period.
 - Created for: UC24.1
- List<**RoomTopology**> getTopologyOverview(int applicationInstanceID, int customerOrganisationID)
 - Effect: Returns a list of RoomTopology containing devices that an **ApplicationInstance** has access to.
 - Created for: UC25.1

7.2.6 AppDeviceMgmt

Provided by: [DeviceManager](#), [GWBrokerLogic](#), [GatewayBroker](#)





Required by: [ApplicationManagementLogic](#), [ApplicationManager](#), [InfrastructureOwnerManager](#), [OSBrokerLogic](#), [OnlineServiceBroker](#)







Operations:

- bool areEssentialDevicesOperational(int applicationID)
 - Effect: Returns true if all essential devices for the application with id "applicationID" are operational.
 - Created for: UC18
- void initialisePluggableDevice(**PluggableDeviceID** plID)
 - Effect: Updates a pluggable device's status to 'active'.

- Created for: UC8.3
- **boolean isDeviceInitialised(**PluggableDeviceID** plID)**
 - Effect: Returns true if the device with id "plID" has been initialized.
 - Created for: UC11: pluggable device needs to be initialised, M1: pluggable device must be able to be initialised
 - TODO: need this check? is 'initialized' status stored in DB or on gateways? or both?
- **void setPluggableDevicesRequirements(int applicationInstanceId, List<**PluggableDeviceInfo**> devices, List<**Relationship**> relationships)**
 - Effect: Sets an application's requirements for pluggable devices. e.g. a device needs to be used instead of another device if that other device fails.
 - Created for: Av3: "Application providers can design their applications such that they explicitly require redundancy in the available pluggable devices."

7.2.7 AppInstanceMgmt












Provided by:  ApplicationContainer,  ApplicationContainerManager,  GWBrokerLogic,  GatewayBroker












Required by:  ApplicationContainerManager,  ApplicationManagementLogic,  ApplicationManager,  DeviceManager,  OSBrokerLogic,  OnlineServiceBroker

Operations:

- **void activateApplicationInstance(int applicationInstanceId)**
 - Effect: Activates an **ApplicationInstance** that is running on the gateway.
 - Created for: UC17.3, U2 - easy applications
- **void deactivateApplicationInstance(int applicationInstanceId)**
 - Effect: Deactivates a running instance of an application.
 - Created for: UC18, Av3: automatic suspension/reactivation of applications.
- **void destroyApplicationInstance(int applicationInstanceId)**
 - Effect: Destroys an **ApplicationInstance**
 - Created for: UC20.4ii
- **boolean isApplicationInstanceAvailable(int applicationInstanceId)**
 - Effect: Returns true if a certain **ApplicationInstance** is available.
 - Created for: UC27.2

7.2.8 AppMessages

Provided by:  ApplicationContainer,  ApplicationContainerManager,  ApplicationInstance,  ApplicationManagementLogic,  ApplicationManager,  ContainerLogic,  GWBrokerLogic,  GatewayBroker,  OSBrokerLogic,  OnlineServiceBroker,  RequestStore

Required by:  ApplicationContainer,  ApplicationContainerManager,  ApplicationInstance,  ApplicationManagementLogic,  ApplicationManager,  ContainerLogic,  GWBrokerLogic,  GatewayBroker,  OSBrokerLogic,  OnlineServiceBroker,  RequestStore

Operations:

- **void applicationInstanceFailed(int applicationInstanceId, int onOnlineService)**
 - Effect: Lets the other parts of an application know that one of their parts has become unavailable. This allowed the other parts to possibly run in a degraded mode. Is called by an **ApplicationContainer** after its **ApplicationInstance** has crashed 3 times in a row.
 - Created for: Av1
- **void sendCommandToApplicationInstance(int applicationInstanceId, string command, boolean forOnlineService) throws *AppMessageNotAllowedException***
 - Effect: Sends a command to an **ApplicationInstance** that is running on the Online Service or on a Gateway.
 - Created for: UC26.1
- **void sendMessageToExternalFrontEnd(string hostName, int port, string message) throws *AppMessageNotAllowedException***

- Effect: Sends a message from an `ApplicationInstance` to an external front end. The `ApplicationInstance` provides the hostname and port.
- Created for: UC26.1

7.2.9 AppMonitoring

Provided by: `ApplicationContainer`, `ApplicationContainerManager`, `ApplicationInstance`

Required by: `ApplicationContainerManager`, `ApplicationContainerMonitor`, `ContainerLogic`

Operations:

- **Echo** `pingApplicationInstance(int applicationInstanceId)`
 - Effect: Sends a ping request to an `ApplicationContainer`. The `ApplicationContainer` should respond with an Echo reply. The monitor uses this to check whether or not the container is still available.
 - Created for: The system is able to autonomously detect failures of its individual failing applications.

7.2.10 AppStatus

Provided by: `ApplicationContainerMonitor`

Required by: `ApplicationContainer`, `ApplicationContainerManager`

Operations:

- `boolean isApplicationInstanceAvailable(int applicationInstanceId)`
 - Effect: Returns true if a certain `ApplicationInstance` is available.
 - Created for: UC27.2
- `void updateApplicationActive(int applicationInstanceId)`
 - Effect: Updates an `ApplicationInstance`'s status to 'active'.
- `void updateApplicationInstanceSuspended(int applicationInstanceId)`
 - Effect: Updates an `ApplicationInstance`'s status to 'suspended'.
- `void updateApplicationStatusUnavailable(int applicationInstanceId)`
 - Effect: Effect: Notifies the `ApplicationContainerMonitor` that an `ApplicationInstance` has crashed.
 - Created for: Av2 - The system is able to autonomously detect failing applications

7.2.11 Authentication

Provided by: `OtherDataDB`

Required by: `AuthenticationManager`

Operations:

- `boolean verifyAuthenticationCredentials(Map<string, string> credentials)`
 - Effect: Returns true if the provided authentication credentials are correct.
 - Created for: UC28.2

7.2.12 Authentication

Provided by: `ApplicationProviderFacade`, `AuthenticationManager`, `CustomerOrganisationFacade`, `InfrastructureOwnerFacade`, `RegisteredUserFacade`, `SystemAdministratorFacade`



Required by: `ApplicationProviderFacade`, `CustomerOrganisationFacade`, `InfrastructureOwnerFacade`, `RegisteredUserFacade`, `SystemAdministratorFacade`



Operations:

- `boolean doesSessionExist(string sessionId)`
 - Effect: Returns true if a session with the given `sessionId` exists.
 - Created for: UC28, UC29
- `string login(Map<string, string> credentials)`

- Effect: Verifies the provided authentication credentials. If everything is correct, logs the user in, creates a unique session, and returns the session’s ID.
Returns an empty string if the provided credentials are incorrect.
- Created for: UC28.1-2
- boolean logout(string sessionID)
 - Effect: If a session with the given sessionID exists, logs the user out and returns true.
 - Created for: UC29.1

7.2.13 Commands


Provided by:  ApplicationContainerManager,  DeviceCommandConstructor


Required by:  ApplicationContainerManager,  ApplicationManagementLogic

Operations:

- void sendActuationCommand(List<**PluggableDeviceID**> device, string commandName) throws *UnknownCommandException*
 - Effect: Sends a command for a list of actuators to **DeviceCommandConstructor** for construction of actuation command messages according to the specific formatting syntax for the given actuators. The given command ‘commandName’ is a command that application developers use for a group of devices.
 - Created for: UC12 - commands from applications
- void verifyAndConstructConfigurationsForDevice(**PluggableDeviceID** plD, Map<string, string> config) throws *UnknownConfigurationParameterException*
 - Effect: Verifies the configuration parameters for a pluggable device. If the parameters have been successfully verified, constructs a reconfiguration command according to the specific formatting syntax for the pluggable device and sends it to the **DeviceManager** if everything is correct.
 - Created for: UC13.2-3

7.2.14 Config


Provided by:  PluggableDevice



Required by:  Mote

Operations:

- Map<String, String> getConfig()
 - Effect: Returns the current configuration of a pluggable device as a parameter-value map.
- boolean setConfig(void Map<string, string>)
 - Effect: Set the given configuration parameters of the pluggable device to the given values. Setting unknown parameters on a pluggable device (e.g., ‘noise threshold’ -> ‘3’ on a light sensor) has no effect.
 - Created for: Given constraint, UC11: pluggable device needs to be initialised, M1: pluggable device must be able to be initialised

7.2.15 Config

Provided by:  Mote

Required by:  DeviceManager,  Gateway

Operations:

- Map<String, String> getConfig(**PluggableDeviceID** plD)
 - Effect: Returns the current configuration of a pluggable device as a parameter-value map.
- boolean setConfig(**PluggableDeviceID** plD, Map<string, string> config)
 - Effect: Set the given configuration parameters of the pluggable device to the given values. Setting unknown parameters on a pluggable device (e.g., ‘noise threshold’ -> ‘3’ on a light sensor) has no effect.
 - Created for: Given constraint, UC11: pluggable device needs to be initialised, M1: pluggable device must be able to be initialised

7.2.16 DataConversion

Provided by: [ContainerLogic](#), [DeviceDataConverter](#)

Required by: [ApplicationContainer](#), [ApplicationInstance](#)

Operations:

- **DeviceData** convert(**DeviceData** data, string targetType)
 - Effect: Converts pluggable device data into other pluggable device data that contains the same information in a different measurement type.
 - Created for: M1: data processing subsystem should be extended with relevant data conversions

7.2.17 DBAccessRightsMgmt

Provided by: [DeviceDB](#)

Required by: [AccessRightsManager](#)

Operations:

- getCustomerOrganisationsRights(**PluggableDeviceID** plID, List<int> custOrgIDs)
 - Effect: Returns a map of AccessRights and the IDs of customer organisations that have those AccessRights on a certain pluggable device.
 - Created for: UC9.4
- void updateAccessRights()
 - Effect: Updates the access rights on a certain pluggable device for a group of customer organisations.
 - Created for: UC9.7

7.2.18 DBAppDeviceMgmt

Provided by: [DeviceDB](#)

Required by: [ApplicationManager](#), [DeviceCommandConstructor](#)

Operations:

- Map<[DataTypesPluggableDeviceID](#), string> getFormattingSyntaxForDevices(List<[DataTypesPluggableDeviceID](#)> devices)
 - Effect: Effect: Retrieves the specific formatting syntax for a list of pluggable devices.
 - Created for: UC12.2-3
- Map<**PluggableDeviceID**, **GatewayInfo**> getGatewaysForDevices(List<**PluggableDeviceID**> devices)
 - Effect: Returns a map of PluggableDevices with the gateways they are connected to.
 - Created for: UC12.2
- string getPossibleConfigurationParametersForDevice(**PluggableDeviceID** plID)
 - Effect: Retrieves the possible configuration parameters for a pluggable device.
 - Created for: UC13.2

7.2.19 DBAppMgmt

Provided by: [OtherDataDB](#)


Required by: [ApplicationManagementLogic](#), [ApplicationManager](#)

Operations:

- void activateApplication(int applicationInstanceID, string status)
 - Effect: Sets an [ApplicationInstance](#)'s status in the [OtherDataDB](#) to 'active'.
 - Created for: UC17.4, U2 - easy applications
- int createApplicationInstance(int custOrgID, int applicationID)
 - Effect: Creates a new [ApplicationInstance](#) for an application for a customer organisation and returns its id. The [ApplicationInstance](#) gets status 'inactive', since it will be activated after a subscription is completed.
 - Created for: UC19.4, U2 - easy applications
- **GatewayInfo** getApplicationInstanceGateway()
 - Effect: Returns information about a gateway that an application instance is running on.

- Created for: Av2 - Need to know which gateways to send messages to for e.g. application commands.
- List<**Application**> getApplications()
 - Effect: Returns a list of applications in the system.
 - Created for: UC19.2, U2 - easy applications
- List<int> getApplicationsForDevice()
 - Effect: Returns a list of applications that can use the device with id "pID".
 - Created for: UC11: the system looks up the list of applications that use the pluggable device
- List<**PluggableDeviceID**> getDevicesForApplication(int applicationInstanceID)
 - Effect: Returns a list of PluggableDeviceID of pluggable devices that an ApplicationInstance can use.
 - Created for: UC17.2, U2 - easy applications
- string getInstallationInstructions(int applicationID)
 - Effect: Returns the installation instructions of a certain application. If there are no installation instructions set, returns an empty string.
 - Created for: UC17.6, U2 - easy applications
- List<**RoomTopology**> getNecessaryDevicesAndTopologyConfigurations(int applicationID)
 - Effect: Returns a list of RoomTopology which is a minimal requirement for a certain application to run. This can be used to display the requirements to a user or to check if requirements are fulfilled.
 - Created for: UC19.5, U2 - easy applications
- void softDeleteApplicationInstance(int applicationInstanceID)
 - Effect: Updates an ApplicationInstance's status in the database to reflect that the customer organisation has unsubscribed from it.
 - Created for: UC20.4ii
- void updateApplicationDevicesSettings(int applicationInstanceID, List<**PluggableDeviceID**> devices, List<**Relationship**> relationships)
 - Effect: Updates an ApplicationInstance's device settings. This includes which devices the instance can use and which relationships exist between those devices.
 - Created for: UC19.6, U2 - easy applications
- void updateApplicationInstance(int applicationInstanceID)
 - Effect: Updates an ApplicationInstance in the database (e.g. change state to 'inactive').
 - Created for: UC18, Av3: automatic suspension/reactivation of applications.
- void updateApplicationInstanceGateway(int applicationInstanceID, int gatewayID)
 - Effect: Updates the gateway on which an application instance is running.
 - Created for: Av2 - Need to know which gateways to send messages to for e.g. application commands.
- void updateCriticality(int applicationInstanceID, int isCritical)
 - Effect: Updates the criticality of an ApplicationInstance.
 - Created for: UC19.11, U2 - easy applications
- void updateSubscription(**Subscription** subscription)
 - Effect: Updates a subscription in the database (e.g. change state to 'disabled').
 - Created for: UC18

7.2.20 DBDeviceData

Provided by:  PluggableDeviceDataDB





Required by:  DeviceDataScheduler






Operations:

- List<**DeviceData**> getData(**PluggableDeviceID** pID, **DateTime** from, **DateTime** to)
 - Effect: Returns data from a specific device in a certain time period.
 - Created for: P2: lookup queries
- getDataForDevices(List<**PluggableDeviceID**> devices, **DateTime** from, **DateTime** to)
 - Effect: Returns DeviceData of pluggable devices over a specified time period.
 - Created for: UC24.2

- void rcvData(**PluggableDeviceID** plD, **DeviceData** data)
 - Effect: Sends pluggable device data to the DB to be stored.
 - Created for: UC11, P2: storing new pluggable data

7.2.21 DBDeviceMgmt

Provided by:  DeviceDB,  GWBrokerLogic,  OSBrokerLogic,  OnlineServiceBroker

Required by:  DeviceManager,  GWBrokerLogic,  GatewayBroker,  GatewayBrokerMonitor,  GatewayMonitor

Operations:

- void addDevice(**PluggableDeviceID** plD, **PluggableDeviceType** type, Map<string, string> configurations, int motelD)
 - Effect: Adds a new pluggable device in the DeviceDB and adds a reference to a mote. The device's status is 'uninitialised' by default and it's current configurations (which are now the default configurations) are stored as well. If the device already exists, removes the data first (in case the device is plugged into a different mote or on a different network).
 - Created for: UC6.3, U2 - easy pluggable device installation
- int addMote(**MotelInfo** motel, int gatewayID, **IPAddress** motelIPAddress)
 - Effect: Adds a new mote in the DeviceDB along with an IP address and a reference to a gateway. Returns the DB id for the mote.
 - Created for: UC4.3, U2 - easy mote installation
- void deactivateMote(int motelD)
 - Effect: Changes the status of a mote to 'inactive'.
 - Created for: UC5.2a
- void deactivatePluggableDevice(**PluggableDeviceID** plD)
 - Effect: Changes the status of a pluggable device to 'inactive'.
 - Created for: UC7.3a
- void deactivatePluggableDevices(List<**PluggableDeviceID**> plDs)
 - Effect: Changes the status of a list of pluggable devices to 'inactive'.
 - Created for: UC5.2b
- Map<string, string> getConfigDB(**PluggableDeviceID** plD)
 - Effect: Gets the last set configurations of a pluggable device from the DeviceDB.
 - Created for: UC6.3 - reintroduced device
- double getPercentageOfGatewaysUnreachable()
 - Effect: Returns the percentage of deployed gateways that have status 'unreachable'.
 - Created for: Av1 - A SIO TIP system administrator should be notified of a simultaneous outage of more than 1% of the registered gateways.
- Map<string, string> getPluggableDeviceData(**PluggableDeviceID** plD)
 - Effect: Effect: Returns all data about a pluggable device in the DeviceDB, such as status, type information, specific formatting syntax (for applications), etc.
 - Created for: UC12 - construction of commands, UC13 - verification of configuration parameters
- void reactivateDevice(**PluggableDeviceID** plD)
 - Effect: Changes the status of a pluggable device to 'active'.
 - Created for: UC6.3 - reintroduced device
- void reactivateMote(int motelD)
 - Effect: Changes the status of the mote with DB id 'motelD' to 'active'.
 - Created for: U2 - Reintroducing a previously known mote should not require any configuration.
- void registerGateway(int gatewayID, **IPAddress** address)
 - Effect: Sets a gateway's status to 'active' and updates its IP address.
 - Created for: U2 - gateway installation
- void updateGatewayStatus(int gatewayID)
 - Effect: Changes a gateway's status.
 - Created for: Av1 - Connectivity of gateways

7.2.22 DBInvoiceMgmt

Provided by: [OtherDataDB](#)

Required by: [InvoiceManager](#)

Operations:

- void createInvoice(**Invoice** invoice)
 - Effect: Stores a new invoice in the database.
 - Created for: UC20.4iii
- **Invoice** getInvoicesForCustomerOrganisation(int customerOrganisationID)
 - Effect: Returns outstanding invoices for a customer organisation.
 - Created for: UC21.1
- void markActivatedApplication(int applicationInstanceID, int custOrgID, **DateTime** date)
 - Effect: Updates an **ApplicationInstance**'s billing information: marks the start of a billing period.
 - Created for: UC17.4, U2 - easy applications

7.2.23 DBIODeviceMgmt

Provided by: [DeviceDB](#)

Required by: [InfrastructureOwnerManager](#)

Operations:

- List<**PluggableDeviceInfo**> getDevices(int infrastructureOwnerID)
 - Effect: Returns a list of **PluggableDeviceInfo** of devices owned by an infrastructure owner.
 - Created for: UC9.2
- void initialisePluggableDevice(**PluggableDeviceID** plID)
 - Effect: Updates a pluggable device's status to 'active'.
 - Created for: UC8.3

7.2.24 DBIOMgmt

Provided by: [OtherDataDB](#)

Required by: [InfrastructureOwnerManager](#)

Operations:

- List<int> getCustomerOrganisations(int infrastructureOwnerID)
 - Effect: Returns a list of IDs of all customer organisations associated with an infrastructure owner.
 - Created for: UC9.4

7.2.25 DBNotificationMgmt

Provided by: [OtherDataDB](#)


Required by: [NotificationHandler](#)


Operations:

- int createNotification(**Notification** notification)
 - Effect: Stores a new notification entry in the database. Returns the id of the new notification.
 - Created for: UC15, Av3: notifications
- **Notification** getDetailedNotification(int userID, int notificationID)
 - Effect: Returns detailed information about a notification for a certain registered user.
 - Created for: UC16.4
- List<**Notification**> getNotifications(int userID)
 - Effect: Returns a list of **Notification** for a certain registered user. Not all details in the **Notification** objects are filled in.
 - Created for: UC16.2
- int lookupNotificationChannelForUser(int userID)
 - Effect: Returns the id of the type of communication channel a user prefers.
 - Created for: UC15
- void setNotificationRead(int notificationID)

- Effect: Marks a notification as 'read'.
- Created for: UC16.5
- **int updateNotification(Notification notification)**
 - Effect: Updates an existing notification (e.g. change status to "sent").
 - Created for: UC15

7.2.26 DBSubscriptionMgmt


Provided by:  OtherDataDB


Required by:  SubscriptionManager

Operations:

- **void createSubscription(int custOrgID, int applicationInstanceID)**
 - Effect: Creates a subscription for a customer organisation to an **ApplicationInstance**. If the customer organisation is already subscribed to an older version of the the application, then the organisation is unsubscribed from that earlier version.
 - Created for: UC19.12-13, U2 - easy applications
- **List<Subscription> getSubscriptions(int custOrgID)**
 - Effect: Returns a list of subscriptions a customer organisation has.
 - Created for: UC19.2, U2 - easy applications
- **List<Subscription> getSubscriptions(int customerOrganisationID)**
 - Effect: Returns a list of the subscriptions of a customer organisation.
 - Created for: UC20.2
- **void softDeleteSubscription(int subscriptionID)**
 - Effect: Ends a subscription.
 - Created for: UC20.4i

7.2.27 DBTopologyMgmt

Provided by:  DeviceDB


Required by:  TopologyManager


Operations:

- **void addDevice(PluggableDeviceID pID, int motelID)**
 - Effect: Adds a new pluggable device to the topology of the infrastructure owner and links it to a mote. The device gets the mote's location by default. If the device is already linked to another mote, overwrites that link.
 - Created for: UC6.3, U2 - easy pluggable device installation
- **void addMote(int motelID, int infrastructureOwnerID, int gatewayID)**
 - Effect: Adds a new mote to a topology of an infrastructure owner. The mote is linked to a gateway and gets status 'unplaced' by default.
 - Created for: UC4.3, U2 - easy mote installation
- **boolean arePluggableDevicesPlaced(List<PluggableDeviceID> devices)**
 - Effect: Returns true if all pluggable devices in the given list have status 'placed' in the topology.
 - Created for: UC17.2, U2 - easy applications
- **void deactivateMote(int motelID)**
 - Effect: Changes the status of a mote in the topology to 'inactive'.
 - Created for: UC5.2a
- **void deactivatePluggableDevice(PluggableDeviceID pID)**
 - Effect: Changes the status of a pluggable device in the topology to 'inactive'.
 - Created for: UC7.3b
- **void deactivatePluggableDevices(List<PluggableDeviceID> pIDs)**
 - Effect: Changes the status of a list of pluggable devices in the topology to 'inactive'.
 - Created for: UC5.2b
- **List<DeviceStatus> getStatusDetailsForGateway(int gatewayID)**

- Effect: Returns details about the status of a certain gateway. e.g. indicating that the device was unavailable between 2 and 3 a.m.
- Created for: UC10.3a
- List<**DeviceStatus**> getStatusDetailsForMote(int motelID)
 - Effect: Returns details about the status of a certain mote. e.g. indicating that the device was unavailable between 2 and 3 a.m.
 - Created for: UC10.3a
- List<**DeviceStatus**> getStatusDetailsForPluggableDevice(**PluggableDeviceID** pID)
 - Effect: Returns details about the status of a certain pluggable device. e.g. indicating that the device was unavailable between 2 and 3 a.m.
 - Created for: UC10.3a
- List<**RoomTopology**> getTopologyOfCustomerOrganisation(int custOrgID)
 - Effect: Returns a list of RoomTopology associated to a customer organisation.
 - Created for: UC19.5, U2 - easy applications
- List<**RoomTopology**> getTopologyOfInfrastructureOwner(int infrastructureOwnerID)
 - Effect: Returns the topology owned by an infrastructure owner.
 - Created for: UC10.2
- List<**MoteInfo**> getUnplacedMotes(int infrastructureOwnerID)
 - Effect: Returns info about unplaced motes that are owned by an infrastructure owner
 - Created for: UC10.2
- List<**PluggableDeviceInfo**> getUnplacedPluggableDevices(int infrastructureOwnerID)
 - Effect: Returns info about unplaced motes that are owned by an infrastructure owner
 - Created for: UC10.2
- void reactivateDevice(**PluggableDeviceID** id)
 - Effect: Changes the status of a pluggable device in the topology to 'placed'.
 - Created for: UC6.3 - reintroduced device
- void reactivateMote(int motelID)
 - Effect: Changes the status of the mote in the topology to 'placed'. The location of the mote is unchanged, it has already been set.
 - Created for: U2 - Reintroducing a previously known mote should not require any con-
guration.
- void updateTopology(int infrastructureOwnerID, List<**RoomTopology**> updatedTopology)
 - Effect: Updates the topology of an infrastructure owner. The 'updatedTopology' is the new one submitted by the infrastructure owner.
 - Created for: UC10.5a

7.2.28 DBUserMgmt

Provided by:  OtherDataDB


Required by:  UserManager


Operations:

- boolean areMandatoryUserRolesAssigned(int applicationInstanceID)
 - Effect: Returns true if all mandatory UserRoles for the application have been assigned to users. Finds the relevant customer organisations through the **ApplicationInstance**.
 - Created for: UC17.1, U2 - easy applications
- boolean canCustomerOrganisationRegister(int infrastructureOwnerID, string hash)
 - Effect: Returns true if the combination of infrastructure owner and hash exists in the system. This means that the infrastructure owner has allowed for a certain customer organistaion to register.
 - Created for: UC1.1
- boolean confirmEmail(string emailAddress, string randomString)
 - Effect: Return true if the given e-mail and randomString match in the database. Returns false if user did not click the link in the received e-mail within 30 minutes.
 - Created for: UC1.5

- `int createCustomerOrganisation(Map<string, string> data)` throws *AddressInvalidException*, *UserNameAlreadyExistsException*, *PaymentInformationInvalidException*
 - Effect: Creates a customer organisation and returns its id. Links the customer organisation to an infrastructure owner by using the information stored in 'createEmailAddressForRegistration'.
 - Created for: UC1.8
- `boolean createEmailAddressForRegistration(string emailAddress, int infrastructureOwnerID)` throws *EmailAddressInvalidException*, *EmailAddressAlreadyExistsException*
 - Effect: If the given e-mail address is valid and not yet in the database, saves the e-mail address in the database, links it to the infrastructure owner and a unique random string for the confirmation e-mail, and the current timestamp. Afterwards, returns true. Otherwise, returns false.
 - Created for: UC1.4
- `boolean createEndUser(int customerOrganisationID, Map<string, string> data)` throws *EmailAddressAlreadyExistsException*, *EmailAddressInvalidException*, *EndUserAlreadyExistsException*, *PhoneNumberInvalidException*
 - Effect: Verifies provided data for a new end-user, checks that the end-user does not exist in the system already, and then stores the end-user information and associates it with the customer organisation. Returns true if everything succeeded.
 - Created for: UC2.3-4
- `List<User> getEndUsers(int custOrgID)`
 - Effect: Returns a list of Users which are associated to a customer organisation.
 - Created for: UC19.8, U2 - easy applications
- `List<UserRole> getMandatoryUserRoles(int applicationID)`
 - Effect: Returns a list of UserRoles that which need to be assigned in order for an *ApplicationInstance* to run.
 - Created for: UC19.7, U2 - easy applications
- `List<UserRole> getOptionalUserRoles(int applicationID)`
 - Effect: Returns a list of UserRoles which can optionally be assigned for an *ApplicationInstance*.
 - Created for: UC19.7, U2 - easy applications
- `List<User> getUsersWithRoles(int applicationInstanceID)`
 - Effect: Returns a list of Users associated to an *ApplicationInstance* that were assigned UserRoles.
 - Created for: UC17.6, U2 - easy applications
- `void softDeleteEndUser(int customerOrganisationID, int userID)`
 - Effect: Marks the profile of an end-user as 'inactive'.
 - Created for UC3.4
- `void updateUserRoles(int applicationInstanceID, Map<int, int> usersAndRoles)`
 - Effect: Updates the UserRoles assigned to Users for a certain *ApplicationInstance*. 'usersAndRoles' maps User IDs to UserRole IDs.
 - Created for: UC19.9, U2 - easy applications

7.2.29 DeliveryMgmt


Provided by:  NotificationHandler

Required by:  ThirdPartyNotificationDeliveryService

Operations:

- `void acknowledgement(int notificationID)`
 - Effect: Sends an acknowledgement to the system for a certain notification to denote that a notification has been received.
 - Created for: UC15

7.2.30 DeliveryMgmt

Provided by:  InvoiceManager

Required by: None

Operations:

- void acknowledgement(int invoiceID)
 - Effect: Sends an acknowledgement to the system for a certain invoice to denote that the invoice has been received.

7.2.31 DeviceCommands

Provided by: `DeviceManager`, `GWBrokerLogic`, `GatewayBroker`

Required by: `ApplicationManager`, `DeviceCommandConstructor`, `OSBrokerLogic`, `OnlineServiceBroker`

Operations:

- Map<**PluggableDeviceID**, string> getFormattingSyntaxForDevices(List<**PluggableDeviceID**> devices)
 - Effect: Retrieves the specific formatting syntax for a list of pluggable devices from the `DeviceManager`. Used by the `DeviceCommandConstructor` on Gateways.
 - Created for: UC12 - commands from applications on gateways
- string getPossibleConfigurationParametersForDevice(**PluggableDeviceID** plD)
 - Effect: Retrieves the possible configuration parameters for a pluggable device. Used by the `DeviceCommandConstructor` on Gateways.
 - Created for: UC13 - configuration commands from applications on gateways
- void sendActuationCommand(Map<**PluggableDeviceID**, string> commandsForDevices)
 - Effect: Sends correctly constructed actuation commands for a group of actuators to the `DeviceManager` on a Gateway.
 - Created for: UC12 - send command message to the intended actuators
- void setConfiguration(**PluggableDeviceID** plD, Map<string, string> config)
 - Effect: Sets configuration parameters of a pluggable device. The `DeviceManager` first determines whether the pluggable device needs to be reconfigured. To do this, it checks the data it has about configurations set by other applications on the pluggable device. If the device can be reconfigured, then the configuration command is propagated to the pluggable device.
 - Created for: UC13.3

7.2.32 DeviceCommands

Provided by: `ApplicationContainerManager`, `ApplicationFrontEndFacade`, `ApplicationManagementLogic`, `ApplicationManager`, `ContainerLogic`

Required by: `ApplicationContainer`, `ApplicationFrontEndClient`, `ApplicationFrontEndFacade`, `ApplicationInstance`

Operations:

- void sendActuationCommand(List<**PluggableDeviceID**> devices, string command)
 - Effect: Sends a command for a list of actuators for construction of the actuation command messages.
 - Created for: UC12.1
- void setConfiguration(**PluggableDeviceID** plD, Map<string, string> config)
 - Effect: Sends a configuration command for a pluggable device for construction of the actual command messages.
 - Created for: UC13.1

7.2.33 DeviceData

Provided by: `DeviceDataScheduler`, `OSBrokerLogic`, `OnlineServiceBroker`, `RequestStore`

Required by: `DeviceManager`, `GWBrokerLogic`, `GatewayBroker`, `RequestStore`

Operations:

- void rcvData(**PluggableDeviceID** plD, **DeviceData** data)
 - Effect: Sends pluggable device data to the scheduler to be processed.
 - Created for: UC11, P2: storing new pluggable data

7.2.34 DeviceData

Provided by: `DeviceManager`, `Gateway`, `Mote`

Required by: `Mote`, `PluggableDevice`

Operations:

- `void rcvData(PluggableDeviceID pID, DeviceData data)`
 - Effect: Provides pluggable device data to the gateway (Initiated by the device).
- `void rcvDataCallback(PluggableDeviceID pID, DeviceData data, int requestID)`
 - Effect: Provides device data to the gateway (Callback of `getDataAsync`).

7.2.35 DeviceMgmt

Provided by: `DeviceManager`, `Gateway`

Required by: `Mote`

Operations:

- `void pluggableDevicePluggedIn(MoteInfo mInfo, PluggableDeviceID pID, PluggableDeviceType type)`
 - Effect: Notify the gateway that a new `PluggableDevice` of the given type is connected to the mote.
- `void pluggableDeviceRemoved(PluggableDeviceID pID)`
 - Effect: Notify the gateway that a `PluggableDevice` is removed.

7.2.36 ForwardData

Provided by: `ApplicationManagementLogic`, `ApplicationManager`

Required by: `DeviceDataScheduler`

Operations:

- `List<int> getApplicationsForDevice(PluggableDeviceID pID)`
 - Effect: Returns a list of application instances that can use the device with id "pID".
 - Created for: UC11: the system looks up the list of applications that use the pluggable device
- `void rcvData(PluggableDeviceID pID, DeviceData data)`
 - Effect: Sends pluggable device data to an application that wants to use it.
 - Created for: UC11: system relays data to applications

7.2.37 FrontEndAppRequests

Provided by: `ApplicationManagementLogic`, `ApplicationManager`

Required by: `CustomerOrganisationFacade`, `InfrastructureOwnerFacade`, `SubscriptionManager`

Operations:

- `void activateApplication(int applicationInstanceID)`
 - Effect: Checks and activates an `ApplicationInstance` (UC17).
 - Created for: UC19.14, U2 - easy applications
- `void checkApplicationsForActivationForCustomerOrganisations(List<int> custOrgIDs)`
 - Effect: Checks and activates 'inactive' `ApplicationInstances` which can now execute again for a list of customer organisations.
 - Created for: UC9.7
- `void checkApplicationsForActivationForInfrastructureOwner(int infrastructureOwnerID)`
 - Effect: Checks and activates `ApplicationInstances` which can now execute (again). The applications checked are those that are subscribed to by customers organisations associated to the given infrastructure owner.
 - Created for: UC10.5b
- `void checkApplicationsForDeactivationForCustomerOrganisations(List<int> custOrgIDs)`
 - Effect: Checks for `ApplicationInstances` that require deactivation for a list of customer organisations.
 - Created for: UC9.7
- `void checkApplicationsForDeactivationForInfrastructureOwner(int infrastructureOwnerID)`

- Effect: Checks and deactivates `ApplicationInstances` which require deactivation. The applications checked are those that are subscribed to by customers organisations associated to the given infrastructure owner.
- Created for: UC10.5c
- `int createApplicationInstance(int custOrgID, int applicationID)`
 - Effect: Creates a new `ApplicationInstance` for an application for a customer organisation and returns its id. The `ApplicationInstance` gets status 'inactive', since it will be activated after a subscription is completed.
 - Created for: UC19.4, U2 - easy applications
- `void destroyApplicationInstance(int applicationInstanceID)`
 - Effect: Destroys an `ApplicationInstance`
 - Created for: UC20.4ii
- `List<Application> getApplications()`
 - Effect: Returns a list of applications in the system.
 - Created for: UC19.2, U2 - easy applications
- `List<RoomTopology> getNecessaryDevicesAndTopologyConfigurations(int applicationID)`
 - Effect: Returns a list of `RoomTopology` which is a minimal requirement for a certain application to run. This can be used to display the requirements to a user or to check if requirements are fulfilled.
 - Created for: UC19.5, U2 - easy applications
- `void softDeleteApplicationInstance(int applicationInstanceID)`
 - Effect: Updates an `ApplicationInstance`'s status in the database to reflect that the customer organisation has unsubscribed from it.
 - Created for: UC20.4ii
- `void updateApplicationDevicesSettings(int applicationInstanceID, List<PluggableDeviceID> devices, List<Relationship> relationships)`
 - Effect: Updates an `ApplicationInstance`'s device settings. This includes which devices the instance can use and which relationships exist between those devices.
 - Created for: UC19.6, U2 - easy applications
- `void updateCriticality(int applicationInstanceID, boolean isCritical)`
 - Effect: Updates the criticality of an `ApplicationInstance`.
 - Created for: UC19.11, U2 - easy applications

7.2.38 GatewayUpdates

Provided by: [§ GatewayMonitor](#)

Required by: [§ GWBrokerLogic](#)

Operations:

- `void gatewayUpdate(int gatewayID, DateTime time)`
 - Effect: Lets the `GatewayMonitor` know that data has been received from a certain `Gateway`. Is called after a synchronisation of the gateway. When 3 consecutive expected synchronisations that do not arrive within 1 minute of their expected arrival time, a gateway outage is detected by the monitor.
 - Created for: Av1 - The Online Service is able to detect that a SIoTIP gateway is not sending data anymore based on the expected synchronisation interval.

7.2.39 GWAppInstanceMgmt

Provided by: [§ ApplicationManagementLogic](#), [§ ApplicationManager](#), [§ OSBrokerLogic](#), [§ OnlineServiceBroker](#)



Required by: [§ DeviceManager](#), [§ GWBrokerLogic](#), [§ GatewayBroker](#)


Operations:

- `void activateApplicationInstance(int applicationInstanceID)`
 - Effect: Activates a new instance of an application.
 - Created for: UC18, Av3: automatic suspension/reactivation of applications.
- `void checkApplicationsForActivationForInfrastructureOwner(int infrastructureOwnerID)`

- Effect: Checks and activates ApplicationInstances which can now execute (again). The applications checked are those that are subscribed to by customers organisations associated to the given infrastructure owner.
- Created for: UC17, UC6.3 - reintroduced device
- void checkApplicationsForDeactivationForPluggableDevice(**PluggableDeviceID** pID)
 - Effect: Checks and possibly deactivates ApplicationInstances which are affected by the unavailability of a pluggable device (Include: UC18: Check and deactivate applications).
 - Created for: UC7.3c
- void checkApplicationsForDeactivationForPluggableDevices(List<**PluggableDeviceID**> pIDs)
 - Effect: Checks and possibly deactivates ApplicationInstances which are affected by the unavailability of a list of pluggable devices (Include: UC18: Check and deactivate applications).
 - Created for: UC5.2c
- void deactivateApplicationInstance(int applicationInstanceID)
 - Effect: Deactivates a running instance of an application.
 - Created for: UC18, Av3: automatic suspension/reactivation of applications.

7.2.40 GWBrokerMonitoring



Provided by:  GWBrokerLogic,  GatewayBroker,  GatewayMonitor




Required by:  GatewayBrokerMonitor

Operations:

- **Echo ping()**
 - Effect: Sends a ping request to a component. The component should respond with an Echo reply. The monitor uses this to check whether or not the component is still available.
 - Created for: Av1 - The Online Service is able to autonomously detect failures of its individual internal communication components.

7.2.41 GWCommunication



Provided by:  GWBrokerLogic,  GatewayBroker


Required by:  Gateway,  OSBrokerLogic,  OnlineServiceBroker

Operations:

- void receive(void ...)
- Effect: Undefined
- void send(void ...)
- Effect: Undefined

7.2.42 Heartbeat

Provided by:  DeviceManager,  Gateway


Required by:  Mote

Operations:

- void heartbeat(Map<string, string> motelInfo, List<Tuple<**PluggableDeviceID**, **PluggableDeviceType**>> pds)
 - Effect: Sends a heartbeat from a mote to a gateway, including a list of the pluggable devices and their device types (i.e. those currently plugged into the mote)
 - Created for: Given constraint, UC14, Av3: failure detection

7.2.43 InvoiceDeliveryMgmt

Provided by: None

Required by:  InvoiceManager

Operations:

- void sendInvoice(Map<string, string> invoiceData)
 - Effect: Sends an invoice using a third party invoicing service.

- Created for: UC21.2

7.2.44 InvoiceMgmt

Provided by: [InvoiceManager](#)

Required by: [ApplicationManagementLogic](#), [ApplicationManager](#), [SubscriptionManager](#)

Operations:

- void constructInvoiceForApplicationInstance(int applicationInstanceId, int customerOrganisationID)
 - Effect: Constructs an invoice for outstanding payments for an ApplicationInstance
 - Created for: UC20.4iii
- void markActivatedApplication(int applicationInstanceId, int custOrgID, **DateTime** date)
 - Effect: Updates an **ApplicationInstance**'s billing information: marks the start of a billing period.
 - Created for: UC17.4, U2 - easy applications

7.2.45 IOMgmt

Provided by: [InfrastructureOwnerManager](#)

Required by: [InfrastructureOwnerFacade](#)

Operations:

- List<int> getCustomerOrganisations(int infrastructureOwnerID)
 - Effect: Returns a list of IDs of all customer organisations associated with an infrastructure owner.
 - Created for: UC9.4
- List<**PluggableDeviceInfo**> getDevices(int infrastructureOwnerID)
 - Effect: Returns a list of PluggableDeviceInfo of devices owned by an infrastructure owner.
 - Created for: UC9.2
- void initialisePluggableDevice(**PluggableDeviceID** plID, int gatewayID)
 - Effect: Updates a pluggable device's status to 'active'.
 - Created for: UC8.3

7.2.46 Monitoring

Provided by: [ApplicationContainerManager](#), [ApplicationContainerMonitor](#)

Required by: [ApplicationExecutionSubsystemMonitor](#)

Operations:

- **Echo** ping()
 - Effect: Sends a ping request to a component. The component should respond with an Echo reply. The monitor uses this to check whether or not the component is still available.
 - Created for: The system is able to autonomously detect failures of its individual application execution components

7.2.47 NotificationDeliveryMgmt

Provided by: [ThirdPartyNotificationDeliveryService](#)

Required by: [NotificationHandler](#)

Operations:

- void notify(Map<string, string> data)
 - Effect: Delivers a notification to an end user using a third party notification delivery service.
 - Created for: UC15

7.2.48 Notifications

Provided by: [NotificationHandler](#)

Required by: [RegisteredUserFacade](#)

Operations:

- **Notification** getDetailedNotification(int userID, int notificationID)
 - Effect: Returns detailed information about a notification for a certain registered user.
 - Created for: UC16.4
- List<**Notification**> getNotifications(int userID)
 - Effect: Returns a list of Notification for a certain registered user. Not all details in the Notification objects are filled in.
 - Created for: UC16.2

7.2.49 Notifications

Provided by: [ApplicationProviderFacade](#), [CustomerOrganisationFacade](#), [InfrastructureOwnerFacade](#), [RegisteredUserFacade](#), [SystemAdministratorFacade](#)

Required by: [ApplicationProviderFacade](#), [CustomerOrganisationFacade](#), [InfrastructureOwnerFacade](#), [SystemAdministratorFacade](#)

Operations:

- **Notification** consultNotification(int userID, int notificationID)
 - Effect: Returns detailed information about a notification for a certain registered user.
 - Created for: UC16.3
- List<**Notification**> consultNotifications(int userID)
 - Effect: Returns a list of Notification for a certain registered user.
 - Created for: UC16.1

7.2.50 Notify

Provided by: [GWBrokerLogic](#), [NotificationHandler](#), [OSBrokerLogic](#), [OnlineServiceBroker](#)

Required by: [ApplicationContainerManager](#), [ApplicationContainerMonitor](#), [ApplicationExecutionSubsystemMonitor](#), [ApplicationManagementLogic](#), [ApplicationManager](#), [DeviceManager](#), [GWBrokerLogic](#), [GatewayBroker](#), [GatewayBrokerMonitor](#), [GatewayMonitor](#)

Operations:

- void notify(int userID, string message)
 - Effect: Stores a new notification in the system and causes it to be sent to a user.
 - Created for: UC14, Av3: notifications
- void notifySystemAdministrator(string message)
 - Effect: Stores a new notification in the system and causes it to be sent to a SIoTIP system administrator.

7.2.51 OSBrokerMonitoring

Provided by: [OSBrokerLogic](#), [OnlineServiceBroker](#), [OnlineServiceMonitor](#), [RequestStore](#)

Required by: [OnlineServiceBrokerMonitor](#)

Operations:

- **Echo** ping()
 - Effect: Sends a ping request to a component. The component should respond with an Echo reply. The monitor uses this to check whether or not the component is still available.
 - Created for: Av1 - The SIoTIP gateway is able to autonomously detect failures of its individual internal communication components.
- void restart()
 - Effect: Restarts the Gateways' communication component.
 - Created for: Av1 - If an internal SIoTIP gateway component fails, the gateway first tries to restart the affected component.

7.2.52 OSCommunication

Provided by: [Gateway](#), [OSBrokerLogic](#), [OnlineServiceBroker](#)

Required by: `GWBrokerLogic`, `GatewayBroker`

Operations:

- `void acknowledgement(int requestID)`
 - Effect: Sends an acknowledgement for a request sent by the SIoTIP gateway.
 - Created for: Av1 - The Online Service should acknowledge each message sent by the SIoTIP gateway so that the gateway can detect failures.
- `void receive(void ...)`
 - Effect: `Undefined`
- `void send(void ...)`
 - Effect: `Undefined`

7.2.53 OSMonitoring

Provided by: `OSBrokerLogic`

Required by: `OnlineServiceMonitor`

Operations:

- `Echo pingOnlineService()`
 - Effect: Makes the BrokerLogic send a ping to the Online Service. The Online Service should respond with an Echo reply. The monitor uses this to check whether or not the component is still available.
 - Created for: The SIoTIP gateway will start synchronising with the Online service within 1 minute after the communication channel becomes available.
- `void synchroniseWithOnlineService()`
 - Effect: Makes the BrokerLogic fetch all pluggable data and application commands as new requests to start sending to the Online Service again.
 - Created for: Av1 - The SIoTIP gateway will start synchronising with the Online service within 1 minute after the communication channel becomes available.

7.2.54 OSUpdates

Provided by: `OnlineServiceMonitor`

Required by: `OSBrokerLogic`

Operations:

- `void onlineServiceUpdate()`
 - Effect: Lets the `OnlineServiceMonitor` know that a message has been received from the Online Service
 - Created for: Av1 - The Online Service should acknowledge each message sent by the SIoTIP gateway so that the gateway can detect failures.

7.2.55 Registration

Provided by: `UnregisteredUserFacade`


Required by: None


Operations:

- `boolean canCustomerOrganisationRegister(int infrastructureOwnerID, string hash)`
 - Effect: Returns true if the combination of infrastructure owner and hash exists in the system. This means that the infrastructure owner has allowed for a certain customer organistaion to register.
 - Created for: UC1.1
- `boolean confirmEmail(string emailAddress, string randomString)`
 - Effect: Return true if the given e-mail and randomString match in the database. Returns false if user did not click the link in the received e-mail within 30 minutes.
 - Created for: UC1.5
- `int createCustomerOrganisation(Map<string, string> data)` throws *AddressInvalidException*, *UserNameAlreadyExistsException*, *PaymentInformationInvalidException*

- Effect: Creates a customer organisation and returns its id. Links the customer organisation to an infrastructure owner by using the information stored in 'createEmailAddressForRegistration'.
- Created for: UC1.7
- boolean createEmailAddressForRegistration(string emailAddress, int infrastructureOwnerID) throws *EmailAddressAlreadyExistsException*, *EmailAddressInvalidException*
 - Effect: If the given e-mail address is valid and not yet in the database, saves the e-mail address in the database, links it to the infrastructure owner and a unique random string for the confirmation e-mail, and the current timestamp. Afterwards, returns true. Otherwise, returns false.
 - Created for: UC1.3-4

7.2.56 RequestData


Provided by:  PluggableDevice



Required by:  Mote

Operations:

- **DeviceData** getData()
 - Effect: Synchronously retrieve the device data of a device.
- void getDataAsync(int requestID)
 - Effect: Asynchronously retrieve the device data of a device (by calling rcvDataCallback).

7.2.57 RequestData

Provided by:  Mote



Required by:  DeviceManager,  Gateway

Operations:

- **DeviceData** getData(**PluggableDeviceID** plID)
 - Effect: Synchronously retrieve the device data of a pluggable device.
- void getDataAsync(**PluggableDeviceID** plID, int requestID)
 - Effect: Asynchronously retrieve the device data of a pluggable device (by calling rcvDataCallback).

7.2.58 RequestData


Provided by:  DeviceDataScheduler


Required by:  ApplicationManagementLogic,  ApplicationManager

Operations:

- List<**DeviceData**> getData(**PluggableDeviceID** plID, **DateTime** from, **DateTime** to)
 - Effect: Requests data from a specific device in a certain time period.
 - Created for: P2: requests from applications
- Map<**PluggableDeviceID**, List<**DeviceData**>> getDataForDevices(List<**PluggableDeviceID**> devices, **DateTime** from, **DateTime** to)
 - Effect: Returns DeviceData of pluggable devices over a specified time period.
 - Created for: UC24.2

7.2.59 Requests

Provided by:  RequestStore

Required by:  OSBrokerLogic

Operations:

- void acknowledgement(int requestID)
 - Effect: Sends an acknowledgement for a request sent by the SIoTIP gateway. Deletes a request that is stored in the RequestStore.

- Created for: Av1 - the SIO TIP gateway will temporarily store all incoming pluggable data and any issued application commands internally
- `List<List<byte>> getNewRequestsForSynchronisation()`
 - Effect: Returns pluggable data and application commands as new requests to start sending to the Online Service again.
 - Created for: Av1 - The SIO TIP gateway will start synchronising with the Online service within 1 minute after the communication channel becomes available.

7.2.60 RoleMgmt

Provided by: `userManager`

Required by: `applicationManagementLogic`, `applicationManager`, `customerOrganisationFacade`

Operations:

- `boolean areMandatoryUserRolesAssigned(int applicationInstanceId)`
 - Effect: Returns true if all mandatory UserRoles for the application have been assigned to users. Finds the relevant customer organisations through the `ApplicationInstance`.
 - Created for: UC17.1, U2 - easy applications
- `List<UserRole> getMandatoryUserRoles(int applicationID)`
 - Effect: Returns a list of UserRoles that which need to be assigned in order for an `ApplicationInstance` to run.
 - Created for: UC19.7, U2 - easy applications
- `List<UserRole> getOptionalUserRoles(int applicationID)`
 - Effect: Returns a list of UserRoles which can optionally be assigned for an `ApplicationInstance`.
 - Created for: UC19.7, U2 - easy applications
- `List<User> getUsersWithRoles(int applicationInstanceId)`
 - Effect: Returns a list of Users associated to an `ApplicationInstance` that were assigned UserRoles.
 - Created for: UC17.6, U2 - easy applications
- `void updateUserRoles(int applicationInstanceId, Map<int, int> usersAndRoles)`
 - Effect: Updates the UserRoles assigned to Users for a certain `ApplicationInstance`. 'usersAndRoles' maps User IDs to UserRole IDs.
 - Created for: UC19.9, U2 - easy applications

7.2.61 Sessions

Provided by: `sessionDB`

Required by: `authenticationManager`

Operations:

- `string createNewSession(int userID)`
 - Effect: Returns the ID of a new login session for a certain user.
 - Created for: UC28.2
- `boolean deleteSession(string sessionId)`
 - Effect: If a session with the given sessionId exists, deletes the session and returns true.
 - Created for: UC29.1
- `boolean doesSessionExist(string sessionId)`
 - Effect: Returns true if a session with the given sessionId exists.
 - Created for: UC28, UC29

7.2.62 SubscriptionMgmt

Provided by: `customerOrganisationFacade`


Required by: `customerOrganisationClient`


Operations:

- `Map<Application, Subscription> getApplicationsToSubscribe(int custOrgID)`

- Effect: Returns a map of Applications and Subscriptions a given customer organisation has to those applications
- Created for: UC19.1, U2 - easy applications
- **List<User> getEndUsers(int custOrgID)**
 - Effect: Undefined
- **List<UserRole> getMandatoryUserRoles(int applicationID)**
 - Effect: Undefined
- **List<RoomTopology> getNecessaryDevicesAndTopologyConfigurations(int applicationID)**
 - Effect: Returns a list of RoomTopology which is a minimal requirement for a certain application to run. This can be used to display the requirements to a user or to check if requirements are fulfilled.
 - Created for: UC19.5, U2 - easy applications
- **List<Subscription> getSubscriptions(int customerOrganisationID)**
 - Effect: Returns a list of the subscriptions of a customer organisation.
 - Created for: UC20.1
- **List<RoomTopology> getTopologyOfCustomerOrganisation(int custOrgID)**
 - Effect: Returns a list of RoomTopology associated to a customer organisation.
 - Created for: UC19.5, U2 - easy applications
- **void registerSubscriptionAndUpdateCriticality(int applicationInstanceId, boolean isCritical, int custOrgID)**
 - Effect: Registers a new subscription and updates the criticality of an ApplicationInstance.
 - Created for: UC19.11-12, U2 - easy applications
- **int subscribeToApplication(int custOrgID, int applicationID)**
 - Effect: Creates a new ApplicationInstance for an application for a customer organisation and returns its id.
 - Created for: UC19.4, U2 - easy applications
- **void unsubscribeFromApplication(int customerOrganisationID, int subscriptionID, int applicationInstanceId)**
 - Effect: Unsubscribes a customer organisation from an application.
 - Created for: UC20.3
- **void updateApplicationDevicesSettings(int applicationInstanceId, List<PluggableDeviceID> devices, List<Relationship> relationships)**
 - Effect: Updates an ApplicationInstance's device settings. This includes which devices the instance can use and which relationships exist between those devices.
 - Created for: UC19.6, U2 - easy applications
- **void updateUserRoles(int applicationInstanceId, Map<int, int> usersAndRoles)**
 - Effect: Updates the UserRoles assigned to Users for a certain ApplicationInstance. 'usersAndRoles' maps User IDs to UserRole IDs.
 - Created for: UC19.9, U2 - easy applications

7.2.63 SubscriptionMgmt

Provided by:  SubscriptionManager


Required by:  CustomerOrganisationFacade

Operations:

- **void createSubscription(int custOrgID, int applicationInstanceId)**
 - Effect: Creates a subscription for a customer organisation to an ApplicationInstance. If the customer organisation is already subscribed to an older version of the application, then the organisation is unsubscribed from that earlier version.
 - Created for: UC19.12-13, U2 - easy applications
- **Map<Application, Subscription> getApplicationsToSubscribe(int custOrgID)**
 - Effect: Returns a map of Applications and Subscriptions a given customer organisation has to those applications
 - Created for: UC19.2, U2 - easy applications
- **Map<Application, Subscription> getApplicationsToSubscribe(int custOrgID)**
 - Effect: Undefined

- List<**Subscription**> getSubscriptions(int customerOrganisationID)
 - Effect: Returns a list of the subscriptions of a customer organisation.
 - Created for: UC20.2
- void softDeleteSubscription(int subscriptionID)
 - Effect: Ends a subscription.
 - Created for: UC20.4i

7.2.64 TopologyMgmt




Provided by:  InfrastructureOwnerFacade








Required by: None

Operations:

- List<**DeviceStatus**> getStatusDetailsForGateway(int gatewayID)
 - Effect: Returns details about the status of a certain gateway. e.g. indicating that the device was unavailable between 2 and 3 a.m.
 - Created for: UC10.3a
- List<**DeviceStatus**> getStatusDetailsForMote(int motelID)
 - Effect: Returns details about the status of a certain mote. e.g. indicating that the device was unavailable between 2 and 3 a.m.
 - Created for: UC10.3a
- List<**DeviceStatus**> getStatusDetailsForPluggableDevice(**PluggableDeviceID** pID)
 - Effect: Returns details about the status of a certain pluggable device. e.g. indicating that the device was unavailable between 2 and 3 a.m.
 - Created for: UC10.3a
- List<**RoomTopology**> getTopology(int infrastructureOwnerID)
 - Effect: Returns the topology owned by an infrastructure owner.
 - Created for: UC10.1
- void updateTopology(int infrastructureOwnerID, List<**RoomTopology**> updatedTopology)
 - Effect: Updates the topology of an infrastructure owner. The 'updatedTopology' is the new one submitted by the infrastructure owner.
 - Created for: UC10.4

7.2.65 TopologyMgmt

Provided by:  OSBrokerLogic,  OnlineServiceBroker,  TopologyManager


Required by:  ApplicationManagementLogic,  ApplicationManager,  CustomerOrganisationFacade,  DeviceManager,  GWBrokerLogic,  GatewayBroker,  InfrastructureOwnerFacade



Operations:

- void addDevice(**PluggableDeviceID** id, int motelID)
 - Effect: Adds a new pluggable device to the topology of the infrastructure owner and links it to a mote. The device gets the mote's location by default. If the device is already linked to another mote, overwrites that link.
 - Created for: UC6.3, U2 - easy pluggable device installation
- void addMote(int motelID, int gatewayID, int infrastructureOwnerID)
 - Effect: Adds a new mote to a topology of an infrastructure owner. The mote is linked to a gateway and gets status 'unplaced' by default.
 - Created for: UC4.3, U2 - easy mote installation
- boolean arePluggableDevicesPlaced(List<**PluggableDeviceID**> devices)
 - Effect: Returns true if all pluggable devices in the given list have status 'placed' in the topology.
 - Created for: UC17.2, U2 - easy applications
- void deactivateMote(int motelID)
 - Effect: Changes the status of a mote in the topology to 'inactive'.
 - Created for: UC5.2a
- void deactivatePluggableDevice(**PluggableDeviceID** pID)

- Effect: Changes the status of a pluggable device in the topology to 'inactive'.
- Created for: UC7.3b
- void deactivatePluggableDevices(List<**PluggableDeviceID**> pIDs)
 - Effect: Changes the status of a list of pluggable devices in the topology to 'inactive'.
 - Created for: UC5.2b
- List<**DeviceStatus**> getStatusDetailsForGateway(int gatewayID)
 - Effect: Returns details about the status of a certain gateway. e.g. indicating that the device was unavailable between 2 and 3 a.m.
 - Created for: UC10.3a
- List<**DeviceStatus**> getStatusDetailsForMote(int motelID)
 - Effect: Returns details about the status of a certain mote. e.g. indicating that the device was unavailable between 2 and 3 a.m.
 - Created for: UC10.3a
- List<**DeviceStatus**> getStatusDetailsForPluggableDevice(**PluggableDeviceID** pID)
 - Effect: Returns details about the status of a certain pluggable device. e.g. indicating that the device was unavailable between 2 and 3 a.m.
 - Created for: UC10.3a
- List<**RoomTopology**> getTopologyOfCustomerOrganisation(int custOrgID)
 - Effect: Returns a list of RoomTopology associated to a customer organisation.
 - Created for: UC19.5, U2 - easy applications
- List<**RoomTopology**> getTopologyOfInfrastructureOwner(int infrastructureOwnerID)
 - Effect: Returns the topology owned by an infrastructure owner.
 - Created for: UC10.2
- List<**MoteInfo**> getUnplacedMotes(int infrastructureOwnerID)
 - Effect: Returns info about unplaced motes that are owned by an infrastructure owner
 - Created for: UC10.2
- List<**PluggableDeviceInfo**> getUnplacedPluggableDevices(int infrastructureOwnerID)
 - Effect: Returns info about unplaced motes that are owned by an infrastructure owner
 - Created for: UC10.2
- void reactivateDevice(**PluggableDeviceID** id)
 - Effect: Changes the status of a pluggable device in the topology to 'placed'.
 - Created for: UC6.3 - reintroduced device
- void reactivateMote(int motelID)
 - Effect: Changes the status of the mote in the topology to 'placed'. The location of the mote is unchanged, it has already been set.
 - Created for: U2 - Reintroducing a previously known mote should not require any con-
guration.
- void updateTopology(int infrastructureOwnerID, List<**RoomTopology**> updatedTopology)
 - Effect: Updates the topology of an infrastructure owner. The 'updatedTopology' is the new one submitted by the infrastructure owner.
 - Created for: UC10.5a

7.2.66 UserMgmt

Provided by:  UserManager


Required by:  CustomerOrganisationFacade,  UnregisteredUserFacade

Operations:

- boolean canCustomerOrganisationRegister(int infrastructureOwnerID, string hash)
 - Effect: Returns true if the combination of infrastructure owner and hash exists in the system. This means that the infrastructure owner has allowed for a certain customer organistaion to register.
 - Created for: UC1.1
- boolean confirmEmail(string emailAddress, string randomString)
 - Effect: Return true if the given e-mail and randomString match in the database. Returns false if user did not click the link in the received e-mail within 30 minutes.

- Created for: UC1.5
- `int createCustomerOrganisation(Map<string, string> data)` throws *AddressInvalidException*, *UserNameAlreadyExistsException*, *PaymentInformationInvalidException*
 - Effect: Creates a customer organisation and returns its id. Links the customer organisation to an infrastructure owner by using the information stored in 'createEmailAddressForRegistration'.
 - Created for: UC1.8
- `boolean createEmailAddressForRegistration(string emailAddress, int infrastructureOwnerID)` throws *EmailAddressAlreadyExistsException*, *EmailAddressInvalidException*
 - Effect: If the given e-mail address is valid and not yet in the database, saves the e-mail address in the database, links it to the infrastructure owner and a unique random string for the confirmation e-mail, and the current timestamp. Afterwards, returns true. Otherwise, returns false.
 - Created for: UC1.3-4
- `boolean createEndUser(int customerOrganisationID, Map<string, string> data)` throws *EmailAddressAlreadyExistsException*, *EmailAddressInvalidException*, *EndUserAlreadyExistsException*, *PhoneNumberInvalidException*
 - Effect: Verifies provided data for a new end-user, checks that the end-user does not exist in the system already, and then stores the end-user information and associates it with the customer organisation. Returns true if everything succeeded.
 - Created for: UC2.3-4
- `List<User> getEndUsers(int customerOrganisationID)`
 - Effect: Returns a list of Users which are associated to a customer organisation.
 - Created for: UC19.8, U2 - easy applications
- `void softDeleteEndUser(int customerOrganisationID, int userID)`
 - Effect: Marks the profile of an end-user as 'inactive'.
 - Created for: UC3.4

7.2.67 UserMgmt

Provided by:  CustomerOrganisationFacade

Required by: None

Operations:

- `List<User> getEndUsers(int customerOrganisationID)`
 - Effect: Returns a list of all end-users associated with a customer organisation.
 - Created for: UC3.1
- `boolean registerEndUser(int customerOrganisationID, Map<string, string> data)` throws *EmailAddressAlreadyExistsException*, *EmailAddressInvalidException*, *PhoneNumberInvalidException*, *EndUserAlreadyExistsException*
 - Effect: Verifies provided data for a new end-user, checks that the end-user does not exist in the system already, and then stores the end-user information and associates it with the customer organisation. Returns true if everything succeeded.
 - Created for: UC2.3-4
- `void unregisterEndUser(int customerOrganisationID, int userID)`
 - Effect: Unregisters an end-user.
 - Created for: UC3.3

7.3 Exceptions

- *AddressInvalidException* Thrown if a given address is invalid. e.g. does not exist.
- *AppMessageNotAllowedException* Thrown if one part of an application is not allowed to send a certain message or command to another part of the application. Contains the reason why the message is not allowed.
- *EmailAddressAlreadyExistsException* Thrown if a new given email address already exists in the system.
- *EmailAddressInvalidException* Thrown if a given email address is invalid. e.g. badly formatted
- *EndUserAlreadyExistsException* Thrown if an entered end user already exists in the system.

- *PaymentInformationInvalidException* Thrown if given payment information is invalid.
- *PhoneNumberInvalidException* Thrown if a given phone number is invalid. e.g. invalid country code
- *UnknownCommandException* Thrown if a command is sent by an application that is not recognised.
- *UnknownConfigurationParameterException* Thrown if an application tries to set a configuration parameter on a device that is not recognised.
- *UserNameAlreadyExistsException* Thrown if a given username already exists in the system.

7.4 Data types

- **Application:**
Contains information about an application uploaded to the SIoTIP system.
- **ApplicationInstance:**
Attributes: int id, int status, int customerOrganisationID, boolean isGatewayVersion
Contains information on an application instance. When an ApplicationInstance is running on the Online Service and on a Gateway, the ApplicationInstances in the ApplicationContainers share the same id.
- **DateTime:**
Represents an instant in time, expressed as a date and time of day.
- **DeviceData:**
Data from a pluggable device. For sensors, this contains sensor values. For actuators, this contains the state of the actuator. The data is encapsulated within a JSON message, and should be converted into something meaningful based on the device type of the pluggable device that sent the data.
- **DeviceStatus:**
Attributes: **PluggableDeviceID** pID, int moteID, int gatewayID, **DateTime** from, **DateTime** to, string status, string details
Contains status details for a specific gateway/mote/pluggable device.
- **Echo:**
Is a reply to an echo request (ping). Contains an Identifier and Sequence Number that matches the request that caused the Echo reply.
- **GatewayInfo:**
Attributes: int gatewayID, **IPAddress** IPAddress, int infrastructureOwnerID
An object containing information on a Gateway.
- **Invoice:**
Contains information about an invoice, such as true provided service or product, the amount to be paid, the date the payment is due, the contact details of the receiver of the bill, etc.
- **IPAddress:**
Represents an Internet Protocol address.
- **MoteInfo:**
Attributes: int moteID, int manufacturerID, int productID, int batteryLevel
An object containing information on a Mote. This is a list of key-value pairs. The values depend on the type of mote. For example, only a battery-powered mote would include the batterylevel info.
- **Notification:**
Attributes: int id, int recipientUserID, string message, int communicationChannelID, int notificationTypeID, **DateTime** dateTime, int triggerID, int status
Contains information about a notification. The communicationChannelID represents the communication channel that will be used to send the notification to the user. The notificationTypeID denotes the type of the notification (normal / alarm / ...).
- **PluggableDeviceID:**
A unique identifier of a pluggable device.
- **PluggableDeviceInfo:**
Attributes: **PluggableDeviceID** id, **PluggableDeviceType** type, Map<string, string> config

Contains information on a pluggable device.

- **PluggableDeviceType:**

Attributes: int manufacturerID, int productID, int type, int measurementUnits

Denotes the type of a pluggable device. It specifies the manufacturer, a model identifier (if any) of the pluggable (e.g. heat-o sensor 5000), the type of pluggable device (e.g. temperature sensor or power socket actuator) and the used measurement units (e.g. degrees Celsius, degrees Fahrenheit or decibel). Within MicroPnP this information is also used to retrieve and install the correct drivers (this is outside the scope of the system),

This description is taken from the Discussion Board on Toledo.

- **Relationship:**

Attributes: **PluggableDeviceID** pID1, **PluggableDeviceID** pID2, string relationship

Represents a relationship between two devices. e.g. device2 can be used for the purpose that device1 fulfills, device2 is preferred over device1 for a responsibility, etc.

- **RoomTopology:**

Attributes: int roomID, List<**PluggableDeviceInfo**> pluggableDevices, **Relationship** relationships, int buildingID, List<**MotelInfo**> motes, List<**GatewayInfo**> gateways

Represents a room in a topology. Contains the room's devices and the relationships between those devices. Depending on whether this data type is used for customer organisation requests or infrastructure owner requests, the motes and gateways field will be left blank.

- **Subscription:**

Attributes: int id, int status, int customerOrganisationID, int applicationInstanceID, int applicationID

Contains data about a subscription by a customer organisation for an application instance. Data about period/length of the subscription is stored in invoices.

- **User:**

Represents a user in the SIoTIP system.

- **UserRole:**

Attributes: int userID, int roleID, int applicationInstanceID, int customerOrganisationID

Contains information on the role that a User fulfills for a certain ApplicationInstance.

A. Attribute-driven design documentation

A.1 Introduction

This chapter contains our ADD log. First, we list the changes we made the ADD process so it fits our workflow better. The remaining part of this chapter is the ADD log. Decompositions 1 and 2 have been changed relative to phase 2a of this project, because we forgot about the given interfaces for gateways and pluggable devices and made up our own (but similar) interfaces instead. The decompositions have been updated to use the given interfaces.

A.2 Adapted ADD process

We left off step a ("Pick an element that needs to be decomposed") since we never really chose a single Element to decompose. Instead, we chose the drivers for each decomposition first and then looked at which elements/subsystems would require changes or which new elements we would need to satisfy those drivers. For component, interfaces, datatypes: we list the new ones, but refer to the plugin exported catalog for descriptions

Decomposition X: DRIVERS (Elements/Subsystem to decompose/expand)

We changed these titles to reflect the architectural drivers we chose first and then denote which elements/subsystems needed changes to satisfy the drivers.

New data types and Interfaces for child modules

For each decomposition, we have listed all new interfaces and data types that we added during the decomposition, but all details have been left out. We used the Visual Paradigm plugin provided by the SA team to generate the element catalog of chapter 6. All details can be found in there.

Also, since an ADD log was no longer a requirement for phase 2b, we have left out intermediary "OtherFunctionality" components and figures of diagrams. This was done to save time.

Verify and refine

We have skipped the verify and refine step because we chose to handle all chosen architectural drivers completely in every decomposition. We did not find this step to be useful after decompositions 1 and 2.

A.3 Decomposition 1: Av3, UC14, UC15, UC18 (SIoTIP System)

Selected architectural drivers

The non-functional drivers for this decomposition are:

- *Av3*: Pluggable device or mote failure

The related functional drivers are:

- *UC14*: Send heartbeat (*Av3*)
This use case checks whether or not motes and pluggable devices are still operational.
- *UC15*: Send notification (*Av3*)
This use case sends a notification to a registered user.
- *UC18*: Check and deactivate applications (*Av3*)
This use case deactivates any application that requires deactivation, because of unavailability of essential pluggable devices or unassigned mandatory roles.

Rationale *Av3* was chosen first since it has high priority and it is more relevant to the core of the system than the other quality requirements with high priority (*M1* and *U2*). We believe that handling pluggable device failure/connectivity is more important to the whole of the system than *M1* and *U2*, and that handling this first would give a stronger starting point for later ADD iterations than *M1* or *U2*.

Architectural design

This section describes what needs to be done to satisfy the requirements for this decomposition and how involved problems/obstacles are solved.

Av3: Failure detection Gateway need to be able to autonomously detect failure of one of its connected motes and pluggable devices. This is achieved by making motes send heartbeats to their connected gateways. The gateways can then monitor their connected devices. The heartbeats contain a list of devices that are connected/operational at the moment the mote sends the heartbeat. Each gateway makes use of a **DeviceManager** component to monitor the devices. This component uses timers to keep track of how long it has been since a device has sent a heartbeat or occurred in a list of connected devices. Once a timer expires, this is treated as a failure.

A mote has failed when 3 consecutive heartbeats do not arrive within 1 second of their expected arrival time. A pluggable device has failed when it does not occur in a heartbeat of the mote in which it is expected to be in. This is detected within 2 seconds after the arrival of the heartbeat.

Av3: Automatic application deactivation and redundancy settings Applications should be automatically suspended when they can no longer operate due to failure of a pluggable device or mote and reactivated once the failure is resolved. Application providers can design their applications such that they explicitly require redundancy in the available pluggable devices.

This problem is tackled by the **DeviceManager**. It stores the requirements for pluggable devices set by applications for all applications that use the gateway that the **DeviceManager** runs on. When it detects that an application can no longer operate due to failures, it will send a command to the **ApplicationManager** (via the **GatewayFacade**) to suspend that application. When the required devices are operational again, the **DeviceManager** detects this and sends a command to reactivate the application.

Applications are suspended within 1 minute after detecting the failure of an essential pluggable device. Application are reactivated within 1 minute after the failure is resolved.

Av3: Notifications The infrastructure owner should be notified of any persistent pluggable device or mote failures. Customer organisations should be notified if one or more of their applications is suspended or reactivated. Applications using a failed pluggable device or any device on a failed mote should be notified. The `NotificationHandler` was put in place to deal with notifications. Other components can use it to generate notifications for certain users in the system. The `NotificationHandler` will then insert information relevant to the notification in the database (message, status, date and time, source, ...), and use an external delivery service to deliver the notification to users. The used delivery medium is based on the user's preferences. Since they are stored in the database, users can always view their notifications via their dashboard. However, this functionality is not expanded on in this decomposition yet.

Infrastructure owners are notified within 1 minute after detecting a mote outage lasting at least 10 seconds.
Infrastructure owners are notified within 1 minute after the detection of the unavailability of a pluggable device for 30 seconds.
Applications are notified of the failure of relevant pluggable devices within 10 seconds.

Alternatives considered

Av3: Failure detection An alternative would have been to move the `DeviceManager` component from gateways to the Online Service. This solution would make the gateways do less work, but would be very unscalable. The reason is that as the customer base (and thus the amount of devices) increases, the Online Service would need to keep track of huge amounts of devices. This would also flood the network to the Online Service with heartbeats.

Av3: Failure detection Another alternative for failure detection could have been the use of a Ping/Echo mechanism instead of Heartbeats. Pings could then be used to check if a device is currently operational. However, as a device could not be operational for a moment because of e.g. interference, timers would still be necessary to keep track of operational devices. We opted to use heartbeats, as this would reduce the amount of data sent over the network used by the motes, and as motes would have to do slightly more work to process each Ping request in order to generate a reply.

Av3: Notifications Reliable and quick delivery of notifications is crucial to the system in order to solve problems should things go wrong. Currently, the solution is to use a third party service for delivery of notifications. In the case that no external services are found satisfactory, or if this dependency on an external service is unwanted, it is possible to build an internal solution for this. For example, a `NotificationSender` component could make use of the **Factory pattern** for different message channels for different delivery methods (each with their own `sendNotification` method). This solution allows us to easily add new message channels in the future with little effort. The disadvantage of this is that an internal solution takes a lot more time to implement.

Instantiation and allocation of functionality

This section lists the new components which instantiate our solutions described in the section above. For each component we note the quality attribute or use case that prompted us to create it. Descriptions about the components can be found under chapter 6.

- `ApplicationManager`: Av3
- `Database`: /
- `DeviceManager`: Av3
- `GatewayFacade`: /
- `Mote`: UC14
- `NotificationHandler`: UC15

Decomposition Figure A.1 shows the components resulting from the decomposition in this run.

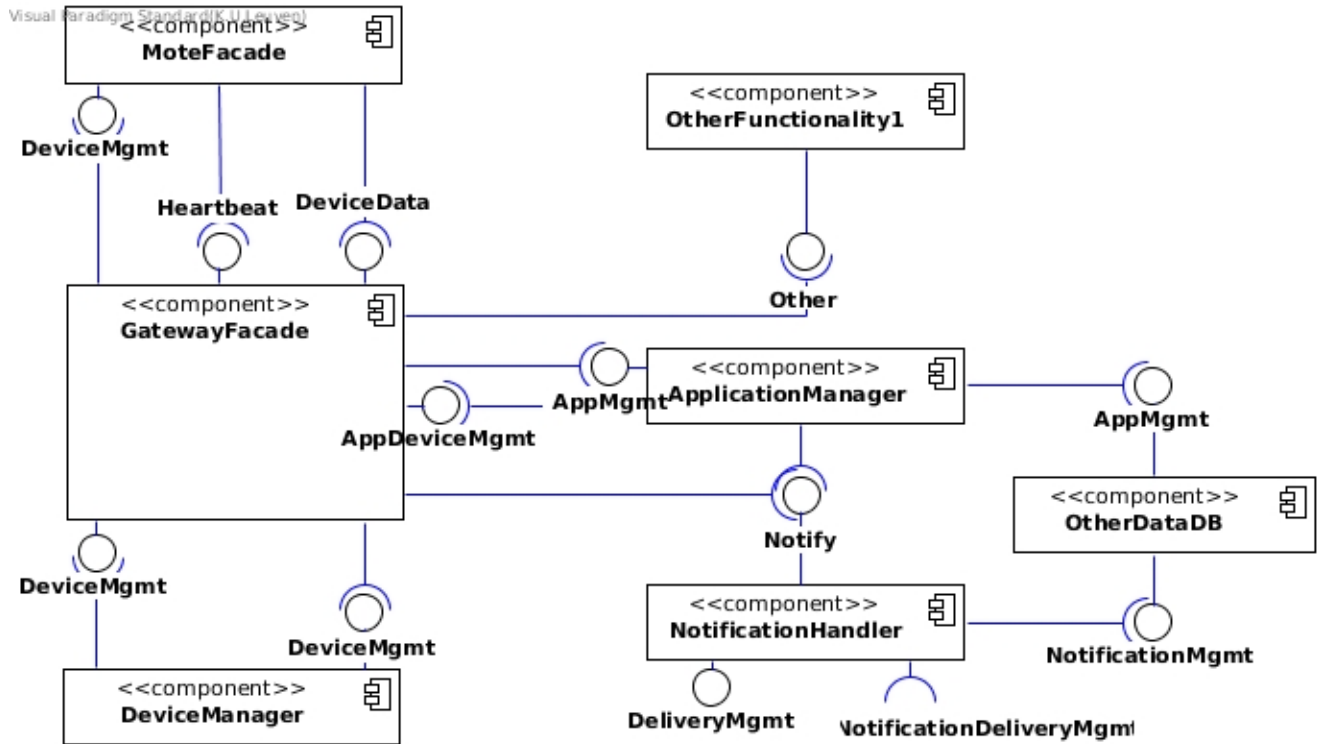


Figure A.1: Component-and-connector diagram of this decomposition.

Deployment Figure A.2 shows the allocation of components to physical nodes.

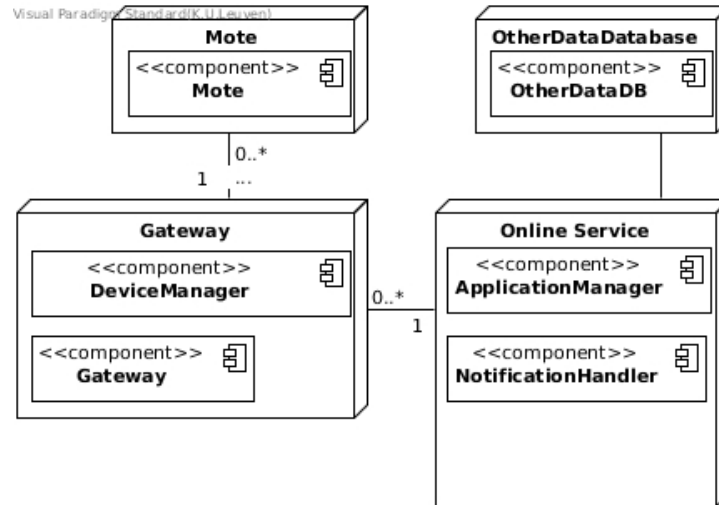


Figure A.2: Deployment diagram of this decomposition.

Interfaces for child modules

This section lists new interfaces assigned to the components defined in the section above. Detailed information about each interface and its methods can be found under chapter 6.

ApplicationManager

- GWAppInstanceMgmt

Database

- NotificationMgmt
- AppMgmt

GatewayFacade

- Heartbeat
- DeviceData
- DeviceMgmt
- AppDeviceMgmt

Mote

- DeviceMgmt

NotificationHandler

- Notify
- DeliveryMgmt

External notification delivery service

- NotificationDeliveryMgmt

DeviceManager

- DeviceMgmt

New data types

This section lists the data types introduced in this decomposition.

- PluggableDeviceInfo
- Notification
- ApplicationInstance
- Subscription
- PluggableDeviceID
- PluggableDeviceType
- DeviceData
- Map<String,String>

Verify and refine

The selected architectural drivers have been handled completely in this decomposition. This section describes per component which (parts of) the remaining requirements it is responsible for. If requirements are split in multiple parts, this is indicated by the addition of a letter (or number, depending on the structure of the requirement) after their title.

ApplicationManager

- *Av2*: Application failure
Prevention: a, b
Detection: a, b, c
Resolution: a, b, c
- *P1*: Large number of users: c
- *M1*: Integrate new sensor or actuator manufacturer: 1.c, 2.a
- *M2*: Big data analytics on pluggable data and/or application usage data: d, e
- *U1*: Application updates: a, b, c, d
- *U2*: Easy Installation: e
- *UC12*: Perform actuation command
- *UC17*: Activate an application: 3, 4

Database

- None

GatewayFacade

- *Av1*: Communication between SIoTIP gateway and Online Service
Resolution: b, c, d
- *M1*: Integrate new sensor or actuator manufacturer: 1.a, 2.b
- *U2*: Easy Installation: a, c, d
- *UC11*: Send pluggable device data: 1

Mote

- *M1*: Integrate new sensor or actuator manufacturer: 1.a, 2.b
- *U2*: Easy Installation: b, c, d
- *UC04*: Install mote: 1, 2
- *UC05*: Uninstall mote: 1
- *UC06*: Insert a pluggable device into a mote: 2
- *UC07*: Remove a pluggable device from its mote: 2
- *UC11*: Send pluggable device data: 1

NotificationHandler

- *UC16*: Consult notification message: 5
- *UC17*: Activate an application: 5, 6

OtherFunctionality1

- *Av1*: Communication between SIoTIP gateway and Online Service
Detection: a, b, c, d Resolution: a
- *P1*: Large number of users: a
- *P2*: Requests to the pluggable data database
- *M1*: Integrate new sensor or actuator manufacturer: 1.d
- *M2*: Big data analytics on pluggable data and/or application usage data: a
- *U2*: Easy Installation: e
- *UC01*: Register a customer organisation
- *UC02*: Register an end-user
- *UC03*: Unregister an end user
- *UC04*: Install mote: 3
- *UC05*: Uninstall mote: 2.b

- *UC06*: Insert a pluggable device into a mote: 3: topology part; alternative 3a.1.b
- *UC07*: Remove a pluggable device from its mote: 3.b
- *UC08*: Initialise a pluggable device: 1, 2, 4
- *UC09*: Configure pluggable device access rights
- *UC10*: Consult and configure the topology
- *UC11*: Send pluggable device data: 3
- *UC13*: Configure pluggable device
- *UC16*: Consult notification message: 1, 2, 3, 4
- *UC17*: Activate an application: 1, 2
- *UC19*: Subscribe to application
- *UC20*: Unsubscribe from application
- *UC21*: Send invoice
- *UC22*: Upload an application
- *UC23*: Consult application statistics
- *UC24*: Consult historical data
- *UC25*: Access topology and available devices
- *UC26*: Send application command or message to external front-end
- *UC27*: Receive application command or message to external front-end
- *UC28*: Log in
- *UC29*: Log out

DeviceManager

- *U2*: Easy Installation: c, d
- *UC04*: Install mote: 4
- *UC05*: Uninstall mote: 2
- *UC06*: Insert a pluggable device into a mote: 3: uninitialised part; alternative 3a.1 3a.2 3a.4; 4
- *UC07*: Remove a pluggable device from its mote: 3.a, 3.c
- *UC08*: Initialise a pluggable device: 3
- *UC11*: Send pluggable device data: 2, 3a

A.4 Decomposition 2: M1, P2, UC11 (OtherFunctionality1)

Selected architectural drivers

The non-functional drivers for this decomposition are:

- *M1*: Integrate new sensor or actuator manufacturer
- *P2*: Requests to the pluggable data database

The related functional drivers are:

- *UC11*: Send pluggable device data (P2)
This use case stores pluggable device data in the pluggable device data storage. This could be a sensor reading or an actuator status.

Rationale We chose M1 as it was one of the remaining quality attributes with high priority. M1's focus on easily introducing new types of devices to the system is very important because of the fast growing market for IoT and development of applications for IoT. Thus, we want to handle this quality attribute before U2 (the other remaining attribute with high priority), as we presume that customer organisations are more interested in using new devices than the effort it takes for infrastructure owners to install the devices.

We also chose P2 because it is strongly related to M1; the whole data flow from devices to storage/applications needs to exist before modifications can even be made. This combination of M1 and P2 would force us to handle processing and storage of data while making the involved components as simple as possible to modify.

Architectural design

This section describes what needs to be done to satisfy the requirements for this decomposition and how involved problems/obstacles are solved.

M1: Data conversion With new types of devices, the pluggable data processing subsystem should be extended with relevant data conversions, e.g. converting temperature in degrees Fahrenheit to degrees Celsius.

The `DeviceDataConverter` is put in place to handle the task of converting pluggable device data to data of a different type in the system. This component can easily be modified for new types of data simply by adding a new conversion method for the new.

M1: Usage of new data by applications The available applications in the system can be updated to use any new pluggable devices.

This is made possible by the `RequestData` interface provided by `DeviceDataScheduler`. Data of the new type of device can be requested in the same way as for older devices: by using the device's unique id. The application manager can get pluggable device data from the `PluggableDeviceDataDB` and return this data to applications in the `DeviceData` datatype. This datatype can easily be updated for new types of pluggable devices.

P2: Scheduling The pluggable data processing subsystem needs to be able to run in normal or overload mode, depending on whether or not the system can process requests within the deadlines given in the quality requirement. Also, a mechanism should be in place to avoid starvation of any type of request.

The `DeviceDataScheduler` is used to deal with this problem. It is responsible for scheduling requests that wish to interact with the `PluggableDeviceDataDB`. In normal mode, the system processes incoming requests in a FIFO order. In overload mode, the requests are given a priority based on what the request is for and what the source of the request is. The requests are then not simply processed in an order based on their priorities, but an aging technique is to be used such that starvation will be avoided. Thus, in overload mode, requests are processed in an order based on a combination of the priorities of the requests and the age of the requests.

P2: Pluggable data separation The processing of (large amounts of) requests concerning pluggable data has no impact on requests concerning other data, e.g. available applications.

In order to satisfy this constraint, all data directly related to pluggable data has been separated into the `PluggableDeviceDataDB`. All requests concerning pluggable data will be handled by this new component. `PluggableDeviceDataDB` will run on a node different from the node that the `Database` component runs on. This way requests concerning pluggable will have no impact on requests concerning other data.

M1: Handling new types of pluggable devices The new types of sensor or actuator data should be transmitted, processed and stored, and should be made available to applications. The infrastructure managers must be able to initialize the new type of pluggable device, configure access rights for these devices, and view detailed information about the new type of pluggable device.

The components created thus far have been created with high cohesion in mind so that updating them for new devices would be relatively straightforward. In order for this constraint to be satisfied, changes have to be made to the following elements:

- *PluggableDevice*: This component needs to be updated so that the new type of device can be initialised and configured, and thus so that the device's data can be sent to the system.
- *DeviceData*: Depending on how this data type is implemented, it might need an update in order for it to represent possible new data types (for example Temperature Filipcikova) and for the new data types to be serialized.
- *PluggableDeviceDataDB*: The database needs to be updated so that information can be retrieved about the new types of sensors and the new types of data. Data related to the displaying of sensor data will also need to be updated.
- *PluggableDeviceConverter*: see above.

Instantiation and allocation of functionality

This section lists the new components which instantiate our solutions described in the section above. For each component we note the quality attribute or use case that prompted us to create it. Descriptions about the components can be found under chapter 6.

- `DeviceDataConverter`: M1
- `DeviceDataScheduler`: P2
- `PluggableDeviceDataDB`: P2
- `PluggableDevice`: UC11

Decomposition Figure A.3 shows the components resulting from the decomposition in this run.

Deployment Figure A.4 shows the allocation of components to physical nodes.

Interfaces for child modules

This section lists new interfaces assigned to the components defined in the section above. Detailed information about each interface and its methods can be found under chapter 6.

ApplicationManager

- `ForwardData`

Mote

- `DeviceData`

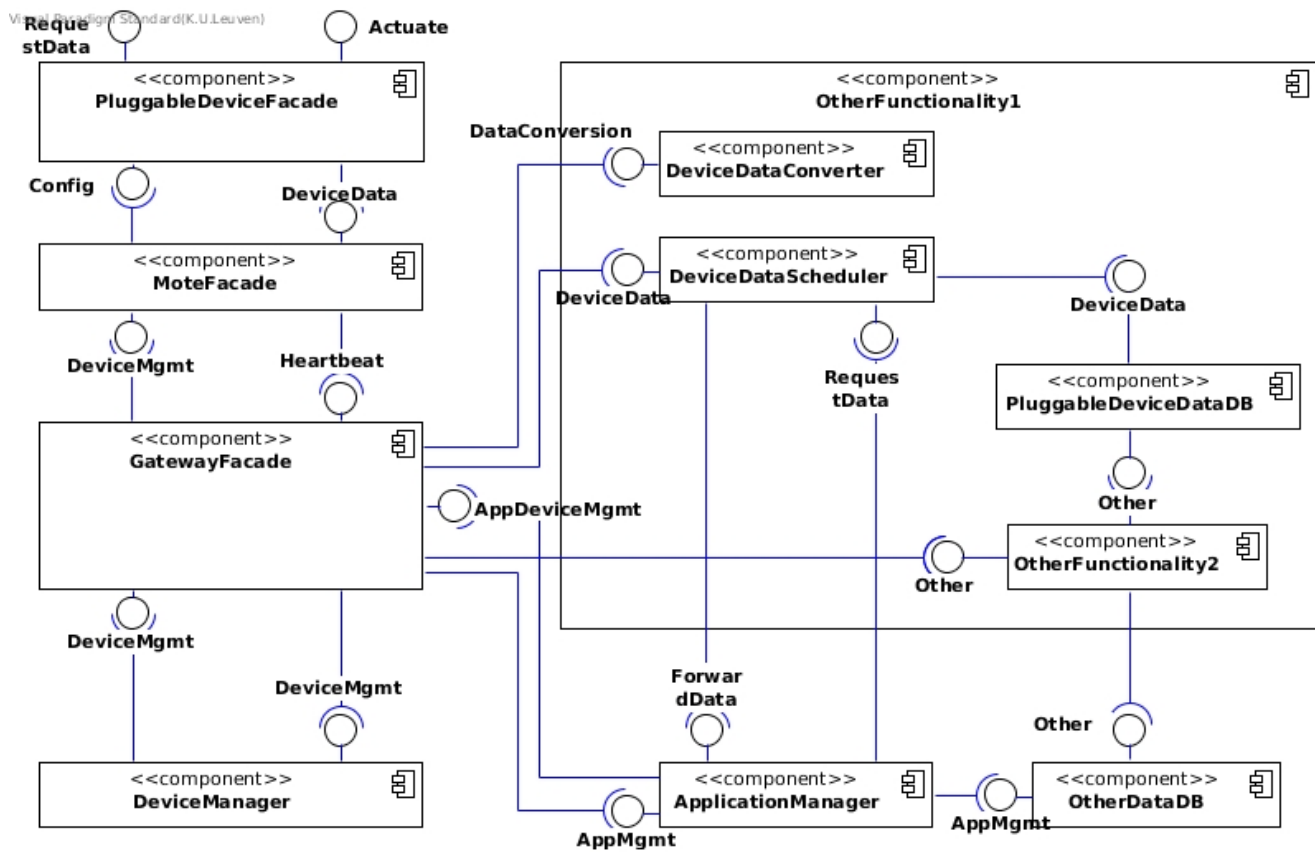


Figure A.3: Component-and-connector diagram of this decomposition.

PluggableDevice

- Actuate
- Config
- RequestData

DeviceDataConverter

- DataConversion

DeviceDataScheduler

- RequestData
- DeviceData

PluggableDeviceDataDB

- DeviceData

New data types

This section lists the new data types introduced during this decomposition.

- DateTime

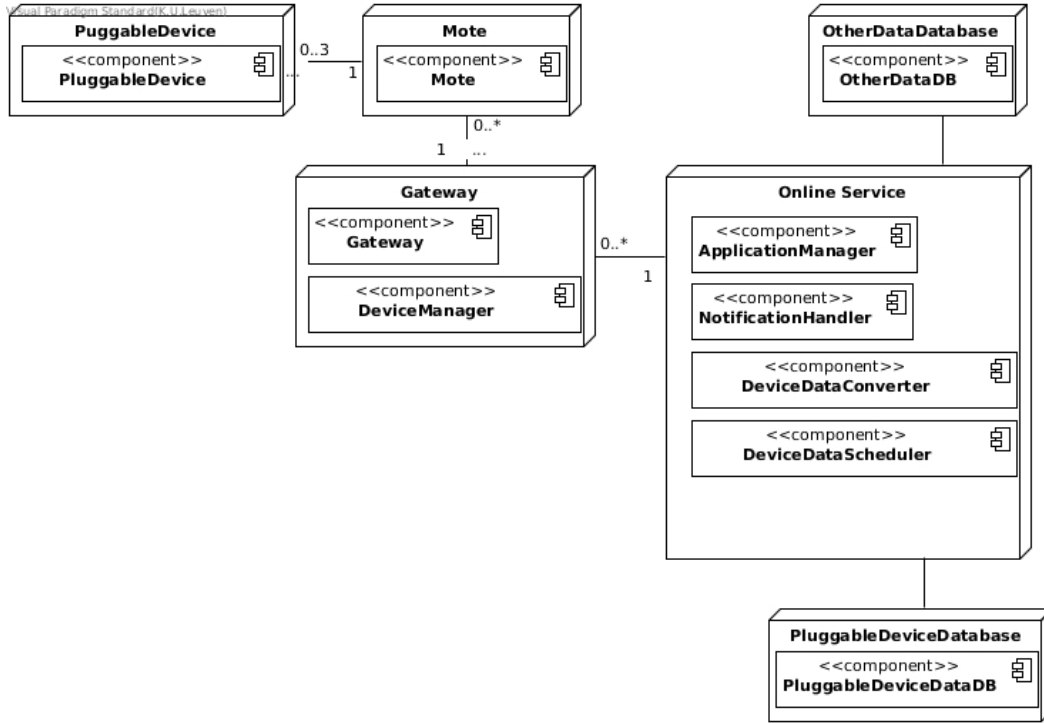


Figure A.4: Deployment diagram of this decomposition.

Verify and refine

The selected architectural drivers have been handled completely in this decomposition. This section describes per component which (parts of) the remaining requirements it is responsible for. If requirements are split in multiple parts, this is indicated by the addition of a letter (or number, depending on the structure of the requirement) after their title.

ApplicationManager

- *Av2*: Application failure
Prevention: a, b
Detection: a, b, c
Resolution: a, b, c
- *P1*: Large number of users: c
- *M2*: Big data analytics on pluggable data and/or application usage data: d, e
- *U1*: Application updates: a, b, c, d
- *U2*: Easy Installation: e
- *UC12*: Perform actuation command
- *UC17*: Activate an application: 3, 4

OtherDataDB

- None

GatewayFacade

- *Av1*: Communication between SIIoTIP gateway and Online Service
Resolution: b, c, d
- *U2*: Easy Installation: a, c, d

Mote

- *U2*: Easy Installation: b, c, d
- *UC04*: Install mote: 1, 2
- *UC05*: Uninstall mote: 1
- *UC06*: Insert a pluggable device into a mote: 2
- *UC07*: Remove a pluggable device from its mote: 2

NotificationHandler

- *UC16*: Consult notification message: 5
- *UC17*: Activate an application: 5, 6

OtherFunctionality2

- *Av1*: Communication between SIIoTIP gateway and Online Service
Detection: a, b, c, d Resolution: a
- *P1*: Large number of users: a
- *M2*: Big data analytics on pluggable data and/or application usage data: a
- *U2*: Easy Installation: e
- *UC01*: Register a customer organisation
- *UC02*: Register an end-user
- *UC03*: Unregister an end user
- *UC04*: Install mote: 3
- *UC05*: Uninstall mote: 2.b
- *UC06*: Insert a pluggable device into a mote: 3: topology part; alternative 3a.1.b
- *UC07*: Remove a pluggable device from its mote: 3.b
- *UC08*: Initialise a pluggable device: 1, 2, 4
- *UC09*: Configure pluggable device access rights
- *UC10*: Consult and configure the topology
- *UC13*: Configure pluggable device
- *UC16*: Consult notification message: 1, 2, 3, 4
- *UC17*: Activate an application: 1, 2
- *UC19*: Subscribe to application
- *UC20*: Unsubscribe from application
- *UC21*: Send invoice
- *UC22*: Upload an application
- *UC23*: Consult application statistics
- *UC24*: Consult historical data
- *UC25*: Access topology and available devices
- *UC26*: Send application command or message to external front-end
- *UC27*: Receive application command or message to external front-end
- *UC28*: Log in
- *UC29*: Log out

PluggableDeviceDataDB

- *M2*: Big data analytics on pluggable data and/or application usage data: b

PluggableDevice

- *U2*: Easy Installation: d

DeviceManager

- *U2*: Easy Installation: c, d
- *UC04*: Install mote: 4
- *UC05*: Uninstall mote: 2
- *UC06*: Insert a pluggable device into a mote: 3: uninitialised part; alternative 3a.1 3a.2 3a.4; 4
- *UC07*: Remove a pluggable device from its mote: 3.a, 3.c
- *UC08*: Initialise a pluggable device: 3,

DeviceDataScheduler

- *P1*: Large number of users: b
- *M2*: Big data analytics on pluggable data and/or application usage data: b, c

A.5 Decomposition 4: Av2, UC12, UC25, UC26, UC27 (application execution subsystem)

Selected architectural drivers

The non-functional drivers for this decomposition are:

- *Av2*: Application failure

The related functional drivers are:

- *UC12*: Perform actuation command
- *UC13*: Configure pluggable device
- *UC25*: Access topology and available devices
- *UC24*: Consult historical data
- *UC26*: Send application command or message to external front-end
- *UC27*: Receive application command or message from external front-end

Rationale At this point the remaining drivers were Av1, Av2, and P1, which all had medium priority. We chose decompositions 4, 5, and 6 based on the priorities of the use cases that are related to the quality attributes.

The related use cases from now on are the ones that would use components that are going to be changed in the decomposition.

Architectural design

This section describes what needs to be done to satisfy the requirements for this decomposition and how involved problems/obstacles are solved.

If you read this, you are cool!

RATIONALE: ApplicationContainerManager and DeviceCommandConstructor need to be reconfigured ivm some used interfaces

Av2: Detection of failures The system is able to autonomously detect failures of its individual application execution components, failing applications, and failing application containers.

Upon detection, a SIoTIP system administrator is notified.

The failure of an internal application execution component is detected within 30 seconds. Detection of failed hardware or crashed software happens within 5 seconds. SIoTIP system administrators are notified within 1 minute.

To detect failures, we made use of the **Container** pattern. The application execution subsystem is composed of:

- ApplicationContainer
- ApplicationContainerMonitor
- ApplicationContainerManager
- ApplicationExecutionSubsystemMonitor

The ApplicationContainers are deployed in groups on different nodes.

ApplicationContainer: is a container/sandbox that has 1 running application instance

ApplicationContainerMonitor: monitors the ApplicationContainer instances

To detect failing applications, ApplicationContainer and ApplicationContainerMonitor ApplicationContainer -> ApplicationContainerMonitor: void applicationCrashed(id applicationInstanceID)

To detect failing application containers, ApplicationContainerMonitor ApplicationContainerMonitor -> ApplicationContainer: Echo ping() -> we say container has crashed/failed when the following has no response:

To detect failures of individual application execution components, This means that one of ApplicationContainer, ApplicationContainerMonitor, ApplicationContainerManager crashed. If the ApplicationContainer failed, then the ApplicationContainerMonitor would detect this. If one of the other two components failed, the ApplicationExecutionSubsystemMonitor is put in place to detect this. These components will be deployed on the Online Service and on gateways. Since gateways are weaker machines than the ones on the Online Service, the ApplicationContainer can be configured differently for gateways. The ApplicationContainers will then have stricter limits on resources used of the node they are working on. DeviceCommandConstructor and ApplicationContainerManager interfaces need to begin re-routed depending on whether they are in a Gateway or on the Online Service.

Av2: Resolution of application failures and application execution component failures In case of application crash, the system autonomously restarts failed applications. If part of an application fails, the remaining parts remain operational, possibly in a degraded mode (graceful degradation). After 3 failed restarts the application is suspended, and the application developer and customer organisation are notified within 5 minutes.

In case of failure of application execution components or an application container, a system administrator is notified.

SIoTIP system administrators are notified within 1 minute.

When an application instance fails, the ApplicationContainerMonitor detects this and sends a command to the ApplicationContainerManager to restart the application instance. The ApplicationContainerMonitor keeps track of how many times the application instance has been restarted after a failure. After 3 failed restarts, the monitor send a command to the ApplicationContainerManager to suspend the application instance and send a notification to the application developers of the application and to the affected customer organisation. Also, to achieve graceful degradation, the ApplicationContainerManager notifies other parts of the application instance of its suspension.

If one of the components of the application execution subsystem fails, a SIoTIP system administrator is notified.

Av2: Failures do not impact other applications or other functionality of the system This does not affect other applications that are executing on the Online service or SIoTIP gateway. This does not affect the availability of other functionality of the system, such as the dashboards.

Applications fail independently: they are executed within their own container to avoid application crashes to affect other applications.

Each ApplicationContainer contains one application instance. If an application fails, then this will be handled by the application execution subsystem so this does not affect any other application or other functionality of the system. The ApplicationContainers are constructed such that failures of applications do not affect the containers. The ApplicationContainers are to be deployed on different nodes alone or grouped with other containers. Write something here.

Instantiation and allocation of functionality

This section lists the new components which instantiate our solutions described in the section above. For each component we note the quality attribute or use case that prompted us to create it. Descriptions about the components can be found under chapter 6.

- ApplicationClient, Av2, UC12, UC13, UC24, UC25, UC26
- ApplicationContainer, Av2, UC12, UC13, UC24, UC25, UC26, UC27
- ApplicationContainerManager, Av2, UC12, UC13, UC24, UC25, UC26, UC27
- ApplicationContainerMonitor, Av2, UC27
- ApplicationExecutionSubsystemMonitor, Av2

- ApplicationFacade, Av2, UC12, UC13, UC24, UC25, UC26
- ApplicationManagementLogic, Av2, UC12, UC13, UC24, UC25, UC26
- DeviceCommandConstructor, Av2, UC12, UC13

Interfaces for child modules

This section lists new interfaces assigned to the components defined in the section above. Detailed information about each interface and its methods can be found under chapter 6.

ApplicationContainer

- AppMessages
- AppInstanceMgmt
- AppMonitoring

ApplicationContainerManager

- AppMessages
- AppInstanceMgmt
- DeviceCommands
- DeviceData

ApplicationContainerMonitor

- Monitoring
- AppStatus

ApplicationFacade

- DeviceData
- DeviceCommands

ApplicationManagementLogic

- DeviceData
- DeviceCommands
- FrontEndAppRequests
- GWAppInstanceMgmt
- AppMessages

DeviceCommandConstructor

- Commands

DeviceManager

- DeviceCommands

DeviceDB

- AppDeviceMgmt

New data types

This section lists the new data types introduced during this decomposition.

- Echo the response to a ping message

A.6 Decomposition 5: Av1 (Gateway - Online Service communication subsystem)

Selected architectural drivers

The non-functional drivers for this decomposition are:

- *Av1*: Communication between SIoTIP gateway and Online Service

Architectural design

This section describes what needs to be done to satisfy the requirements for this decomposition and how involved problems/obstacles are solved.

Av1: New Gateway responsibilities The SIoTIP gateway is able to autonomously detect failures of its individual internal communication components.

The Online Service should acknowledge each message sent by the SIoTIP gateway so that the gateway can detect failures.

If an internal SIoTIP gateway component fails, the gateway first tries to restart the affected component. If the failure persists, the SIoTIP gateway reboots itself entirely. Note that the SIoTIP gateway, due to the occurred failure, cannot contact a system administrator itself.

If (an internal communication component of) the Online Service or the communication channel has failed, the SIoTIP gateway will temporarily store all incoming pluggable data and any issued application commands internally.

If the Online Service becomes unreachable, application parts running locally on the SIoTIP gateway continue to operate normally.

The SIoTIP gateway will start synchronising with the Online service within 1 minute after the communication channel becomes available.

The SIoTIP gateway can store at least 3 days of pluggable data before old data has to be overwritten.

OnlineServiceBroker: Isolates communication-related concerns between Gateways and the Online Service along with GatewayBroker on the Online Service. Forwards requests from one party to the other and transmits results and possible exceptions.

OnlineServiceBrokerMonitor: Monitors the communication component on Gateways. If the communication component fails, the monitor tries to restart it. If the failure persists, the gateway reboots itself entirely.

In OnlineServiceBroker: BrokerLogic: Handles all functionality related to communication. **RequestStore:** Temporarily stores all pluggable data and issued application commands until they can be deleted (= until an acknowledgement has been received for the request by the Online Service). Can store at least 3 days of pluggable data before old data has to be overwritten. **OnlineServiceMonitor:** Monitors the Gateway's connectivity to the Online Service. If the Online Service or the communication channel has failed, all requests to the Online Service will be stopped and stored in the RequestStore. An explicit command for this is not necessary, because the requests in the RequestStore will not be deleted, since no acknowledgements are received anymore from the Online Service. After the monitor detects that a connection to the Online Service is possible again, it makes the gateway start synchronising again. When the Online Service is unreachable, application parts running locally on the SIoTIP gateway continue to operate normally.

INTERFACES: **OnlineServiceBroker:** HAS ALL INTERFACES PROVIDED BY COMPONENTS INSIDE OF IT

interface CommunicationComponentMonitoring used by **OnlineServiceBrokerMonitor:** `boolean check()` `void restart()`

BrokerLogic: **interface OSCommunication** used by **Online Service:** `void acknowledgement(int requestID)` `void send(...)` `void receive(...)`

interface OSMonitoring used by **OnlineServiceMonitor:** `Echo pingOnlineService()` `void synchroniseWithOnlineService()`

RequestStore: All interfaces that are going to the online service now go to the broker All requests come in here and are stored The requests are then forwarded to BrokerLogic containing a unique requestID
Interface Communication used by BrokerLogic: void deleteRequest(int requestID) List<Object> getNewRequestsForSynchronisation()
OnlineServiceMonitor: Online service keeps track of connection to Online Service. If the Online Service becomes unreachable (= does not send ACKs anymore), then start pingging the Online Service
Interface OSUpdates used by BrokerLogic: void onlineServiceUpdate()

Av1: New Online Service responsibilities The Online Service is able to autonomously detect failures of its individual internal communication components.

The Online Service is able to detect that a SIO TIP gateway is not sending data anymore based on the expected synchronisation interval.

The Online Service notifies the infrastructure manager and a SIO TIP system administrator when the outage of a SIO TIP gateway is detected.

The failure of an internal SIO TIP Online Service component is detected within 30 seconds.

The detection time for a failed SIO TIP gateway or channel depends on the transmission rate of the gateway.

An outage is de

ned as 3 consecutive expected synchronisations that do not arrive within 1 minute of their expected arrival time.

The infrastructure owner is noti

ed within 5 minutes after the detection of an outage of their gateway.

A SIO TIP system administrator should be noti

ed within 1 minute after the detection of a simultaneous outage of more than 1% of the registered gateways.

GatewayBroker: Isolates communication-related concerns between the Online Service Gateways and along with OnlineServiceBroker on Gateways. Forwards requests from one party to the other and transmits results and possible exceptions.

Sends acknowledgements for all messages sent by Gateways so that they can detect failures.

GatewayBrokerMonitor: Monitor the communication component for communication with gateways on the Online Service.

In GatewayBroker: BrokerLogic: Handles all functionality related to communication. GatewayMonitor: Monitors the connectivity status all gateways. Can detect that a gateway is not sending data anymore based on the expected synchronisation interval. If 3 consecutive expected synchronisations do not arrive within 1 minute of their expected arrival time, this is detected as a gateway outage. When outages of gateways are detected, the infrastructure owners that own the gateways and a SIO TIP system administrator are notified. When the connectivity status change of a Gateway is detected, this is saved in the DeviceDB.

INTERFACES: GatewayBroker: HAS ALL INTERFACES PROVIDED BY COMPONENTS INSIDE OF IT interface CommunicationComponentMonitoring used by GatewayBrokerMonitor: boolean check()

BrokerLogic: ALL INTERFACES FROM OS TO GATEWAY ARE NOW TO THIS COMPONENT

interface GWCommunication used by Gateway/BrokerLogic:

GatewayMonitor:

interface GatewayUpdates used by BrokerLogic: void gatewayUpdate(int gatewayID, DateTime time)

NotificationHandler: Interface Notify used by GatewayMonitor

DeviceDB: Interface DeviceMgmt used by GatewayMonitor: void setGatewayUnreachable() void getPercentageOfUnreachableGateways()

In BROKER, many clients can make remote method invocations on specific remote component objects hosted by a server. Clients thus communicate with the server objects in a many-to-one fashion, and their functional interfaces are often statically typed. The remote method invocation style of communication provided by BROKER is best suited for systems that try to hide the presence of the network.

MESSAGING relaxes this coupling and typing: clients send dynamically typed messages to specific remote services that reside at communication endpoints, not (necessarily) to specific methods. MESSAGING thus enables many-to-one communication without statically pre-defining the interface dependencies of clients to services.Distribution Infrastructure

PUBLISHER-SUBSCRIBER decouples an application's components even more: they can exchange events in a one-to-many manner without knowing one another's identity explicitly, and without having to make a request each time new events are available. PUBLISHER - SUBSCRIBER middleware is therefore responsible for tracking which subscribers receive specific events sent asynchronously by publishers. Subscribers react when receiving an event by performing some action, but publishers do not directly initiate the execution of a specific method on the subscribers.

BROKER makes invocations on remote component objects look and act as much as possible like invocations on component objects in the same address space as their clients. MESSAGING and PUBLISHER-SUBSCRIBER are most appropriate for integration scenarios in which multiple, independently developed and self-contained services or applications must collaborate and form a coherent software system.

A message channel does not come without cost, however, since it needs memory, networking resources, and persistent storage to support GUARANTEED DELIVERY [HoWo03]. Developers must therefore plan and configure the number and types of message channels explicitly and thoughtfully to ensure the desired quality of service in a given system deployment. A well-designed set of message channels forms a MESSAGE BUS [HoWo03] that acts like a messaging API for the clients and services in the distributed system.

Employed tactics and patterns: broker, heartbeat, ping/echo

DEPLOYMENT RATIONALE: OnlineServiceBroker OnlineServiceBrokerMonitor

GatewayBroker GatewayBrokerMonitor

For both the Online Service and Gateways, the components used for communication (`OnlineServiceBroker`, `GatewayBroker`) are to be deployed on different nodes than their monitoring components (`OnlineServiceBrokerMonitor`, `GatewayBrokerMonitor`). Otherwise, if the node of a communication component fails, its monitoring component would also fail and thus nothing would be detected.

Alternative for monitoring of gateways: Gateway updated come to GatewayMonitor We could make GatewayMonitor ping all the gateways However, this would increase traffic on the network

Alternative for communication: Messaging, Publisher Subscriber

Instantiation and allocation of functionality

This section lists the new components which instantiate our solutions described in the section above. For each component we note the quality attribute or use case that prompted us to create it. Descriptions about the components can be found under chapter 6.

- BrokerLogic: Av1
- OnlineServiceBroker: Av1
- OnlineServiceBrokerMonitor: Av1
- GatewayBroker: Av1
- GatewayBrokerMonitor: Av1
- RequestStore: Av1
- GatewayMonitor: Av1
- OnlineServiceMonitor: Av1

Interfaces for child modules

This section lists new interfaces assigned to the components defined in the section above. Detailed information about each interface and its methods can be found under chapter 6.

BrokerLogic

- Communication
- OSCommunication
- GWCommunication
- OSMonitoring

OnlineServiceBroker

- CommunicationComponentMonitoring

GatewayBroker

- CommunicationComponentMonitoring

RequestStore

- Communication

GatewayMonitor

- GatewayUpdates

OnlineServiceMonitor

- OSMonitoring

A.7 Decomposition 6: P1, UC1, UC2, UC3, UC5, UC7, UC8, UC16, UC20 (Elements/Subsystem to decompose/expand)

Selected architectural drivers

The non-functional drivers for this decomposition are:

- *P1*: Large number of users

The related functional drivers are:

- *UC1*: Register a customer organisation
- *UC2*: Register an end-user
- *UC3*: Unregister an end-user
- *UC5*: Uninstall mote
- *UC7*: Remove a pluggable device from its mote
- *UC8*: Initialise a pluggable device
- *UC10*: Consult and configure the topology
- *UC16*: Consult notification message
- *UC20*: Unsubscribe from application

Architectural design

This section describes what needs to be done to satisfy the requirements for this decomposition and how involved problems/obstacles are solved.

<https://www.alertra.com/blog/2010/improve-availability-performance-using-database-replication> <https://serverfault.com/questions/1111111/are-the-performance-implications-for-using-sql-server-replication>

" Ik dacht aan misschien de meeste van de componenten gewoon duplicaten maar dan is de DB wel u bottleneck en dan moet ge zo'n systeem van distributed systems gebruiken om ook de databases juist te kunnen replicaten. Maar daarnaast echt geen idee ivm performance. Ge kunt wel bullshit van de "tactics" in u rationale zetten zoals the developers have to "increase computation efficiency" and "reduce computational overhead". Manage event rate en scheduling policy kunt ge misschien wel gebruiken om er voor te zorgen dat bepaalde taken gebeuren op een moment dat de load op de online service wat lager is maar ik weet Ni echt welke taken "

*) Most components can be duplicated for load balancing *) Related DB's should use a DBMS that can be scaled horizontally. *) DB calls caused by IO vs CO have been mostly split up in DeviceDB and OtherDataDB, so those 2 groups of users don't influence each other too much

P1: Problem title The SIoTIP Online Service replies to the service requests of the infrastructure owner and customer organisations.

P1: Problem title The Online Service processes the data received from the gateways.

P1: Problem title The application execution subsystem should be able to execute an increasing number of active applications.

P1: Problem title The initial deployment of SIoTIP should be able to deal with at least 5000 gateways in total, and should be provisioned to service at least 3000 registered users simultaneously connected to SIoTIP. -> 5000 gateways * 4 motes per gateway * 3 devices per mote = 60000 devices -> Keep communication with gateways at a minimum e.g. gateway messages are of type "send data", "new device connected", ... -> LOAD BALANCING

P1: Problem title Scaling up to service an increasing amount of infrastructure owners, customers organisations and applications should (in worst case) be linear ; i.e. it should not require proportionally more resources (machines, etc.) than the initial amount of resources provisioned per customer organisation/infrastructure owner and per gateway.

Instantiation and allocation of functionality

This section lists the new components which instantiate our solutions described in the section above. For each component we note the quality attribute or use case that prompted us to create it. Descriptions about the components can be found under chapter 6.

- ApplicationProviderClient: UC16
- ApplicationProviderFacade: UC16
- RegisteredUserFacade: UC16
- SystemAdministratorFacade: UC16
- UnregisteredUserClient: UC1
- UnregisteredUserFacade: UC1

Interfaces for child modules

This section lists new interfaces assigned to the components defined in the section above. Detailed information about each interface and its methods can be found under chapter 6.

ApplicationProviderFacade

- Notifications

CustomerOrganisationFacade

- Notifications
- UserMgmt

InfrastructureOwnerFacade

- Notifications
- TopologyMgmt

NotificationHandler

- Notifications

RegisteredUserFacade

- Notifications

SystemAdministratorFacade

- Notifications

UnregisteredUserFacade

- Registration

UserManager

- UserMgmt

New data types

This section lists the new data types introduced during this decomposition.

- Invoice
- EmailAddressAlreadyExistsException
- EmailAddressInvalidException
- EndUserAlreadyExistsException
- PaymentInformationInvalidException
- PhoneNumberInvalidException
- UserNameAlreadyExistsException

A.8 Decomposition 7: UC28, UC29 (Elements/Subsystem to decompose/expand)

At this point, all quality attributes have been handled. The remaining decompositions handle all of the use cases that are left. The order is based on the priority of the use cases.

Selected architectural drivers

The functional drivers are:

- *UC28*: Log in
- *UC29*: Log out

Sessions are used to check whether or not a user is currently logged in.

On successful login, a new session is created and stored in the SessionDB with a unique sessionID which is returned to the front end. The client then sends this sessionID in future requests to represent that the user is logged in.

A database is used for checking the sessions, so that replication can be done on components that handle front end requests. If the session was stored in files, this would add extra overhead to keep all replica's that store session files consistent. It is easier to do this using a database. Also, a separate database is used to not add a lot of extra requests for sessions to another database.

Instantiation and allocation of functionality

This section lists the new components which instantiate our solutions described in the section above. For each component we note the quality attribute or use case that prompted us to create it. Descriptions about the components can be found under chapter 6.

- SessionDB: UC28, UC29
- AuthenticationManager: UC28, UC29

Interfaces for child modules

This section lists new interfaces assigned to the components defined in the section above. Detailed information about each interface and its methods can be found under chapter 6.

ApplicationProviderFacade

- Authentication

AuthenticationManager

- Authentication

CustomerOrganisationFacade

- Authentication

InfrastructureOwnerFacade

- Authentication

NotificationHandler

- Authentication

OtherDataDB

- Authentication

RegisteredUserFacade

- Authentication

SessionDB

- Sessions

SystemAdministratorFacade

- Authentication

A.9 Decomposition 9: UC21 (Elements/Subsystem to decompose/expand)

Selected architectural drivers

The functional drivers are:

- *UC21*: Send invoice

Instantiation and allocation of functionality

This section lists the new components which instantiate our solutions described in the section above. For each component we note the quality attribute or use case that prompted us to create it. Descriptions about the components can be found under chapter 6.

- ThirdPartyInvoicingService: UC21

Interfaces for child modules

This section lists new interfaces assigned to the components defined in the section above. Detailed information about each interface and its methods can be found under chapter 6.

ThirdPartyInvoicingService

- InvoiceDeliveryMgmt

InvoiceManager

- DeliveryMgmt