


Component Style Guide

Core building blocks for the OIT (Operator Interface Terminal) frontend


Buttons



CLICK TO TOGGLE



DISABLED



Form controls

Text input

Select

Option A ▼

☒ Checkbox option

☐ Disabled checkbox

☒ Radio option 1

☐ Radio option 2

☒ Toggle switch

Status badges

Info

Warning

Critical

Success

Neutral

Status lights



Info



Warning



Critical



Online



Neutral

NO LABEL



SMALL



Info



Warning



Critical



Online



Neutral

Gauges



PRESSURE



TEMPERATURE



FLOW RATE

Metric tiles

RPM

1,842

▲ 12

VIBRATION

0.34 mm/s

▼ 0.02

BEARING TEMP

86 °C

▲ 3

UPTIME

99.2 %

— 0

Trend sparklines

LINE PRESSURE



MOTOR TEMP



FAULT COUNT



Alarm panel



Relay node 7 link loss
04:12:33 UTC

ACK



Sensor array 3 latency above threshold
04:10:02 UTC

ACK



Firmware update available for node 2
03:58:47 UTC

ACK


Emergency stop



E-STOP

READY

Square buttons



START




STOP



PAUSE



RESET



DISABLED

Typography

Heading 1

Heading 2

Body text used for standard content and descriptions.

Muted text used for secondary/help content.

Tabs


Overview

Details

Settings

Overview panel content.

Map — LineLayer (deck.gl)

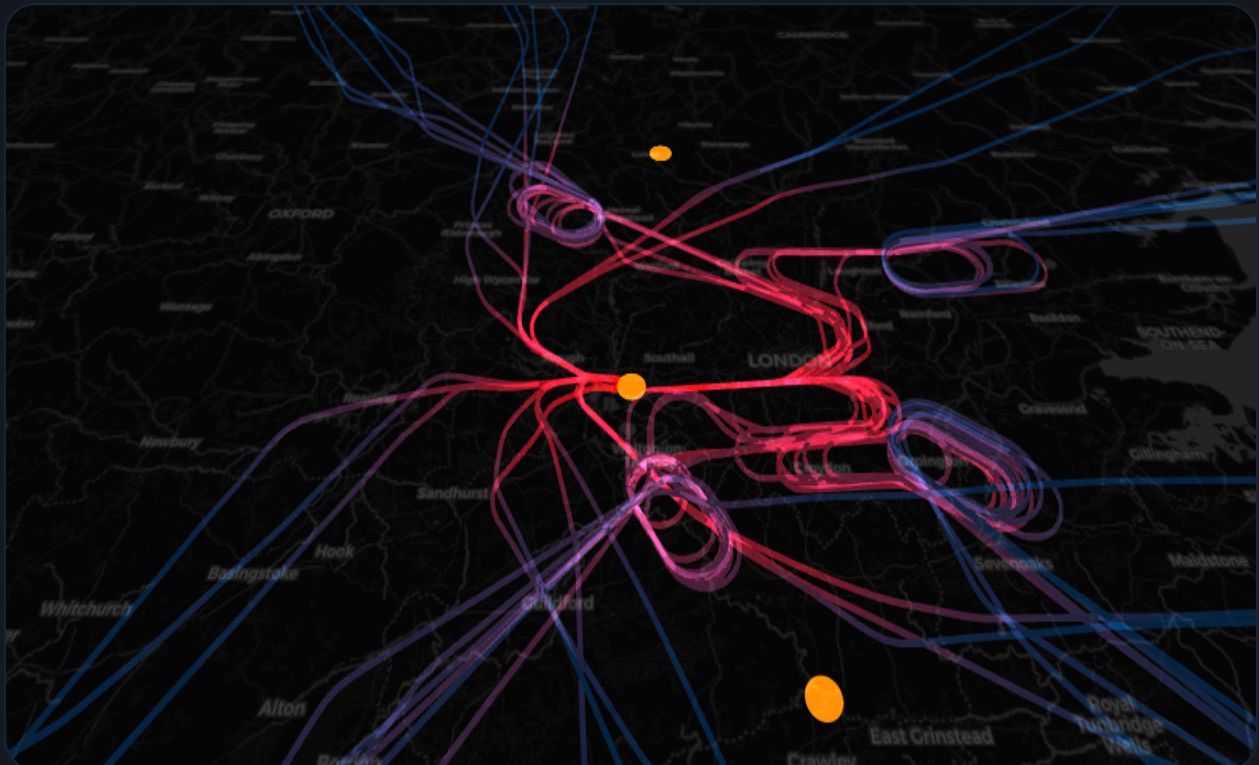

Alerts

Info



System nominal, all subsystems reporting.

Warning



Sensor array 3 latency above threshold.

Critical



Link loss on relay node 7.

Success



Calibration completed successfully.

Modal

Open modal

Open info modal

Open danger modal

Tooltip

Hover me

Progress & loading

Sync progress

62%






Slider

Threshold

40



Accordion

Diagnostics



Maintenance



Security



Table

ID	Node	Status
001	Relay A	Online
002	Relay B	Online
003	Relay C	Degraded

Breadcrumb & pagination

Home / Operations / Relay nodes

