

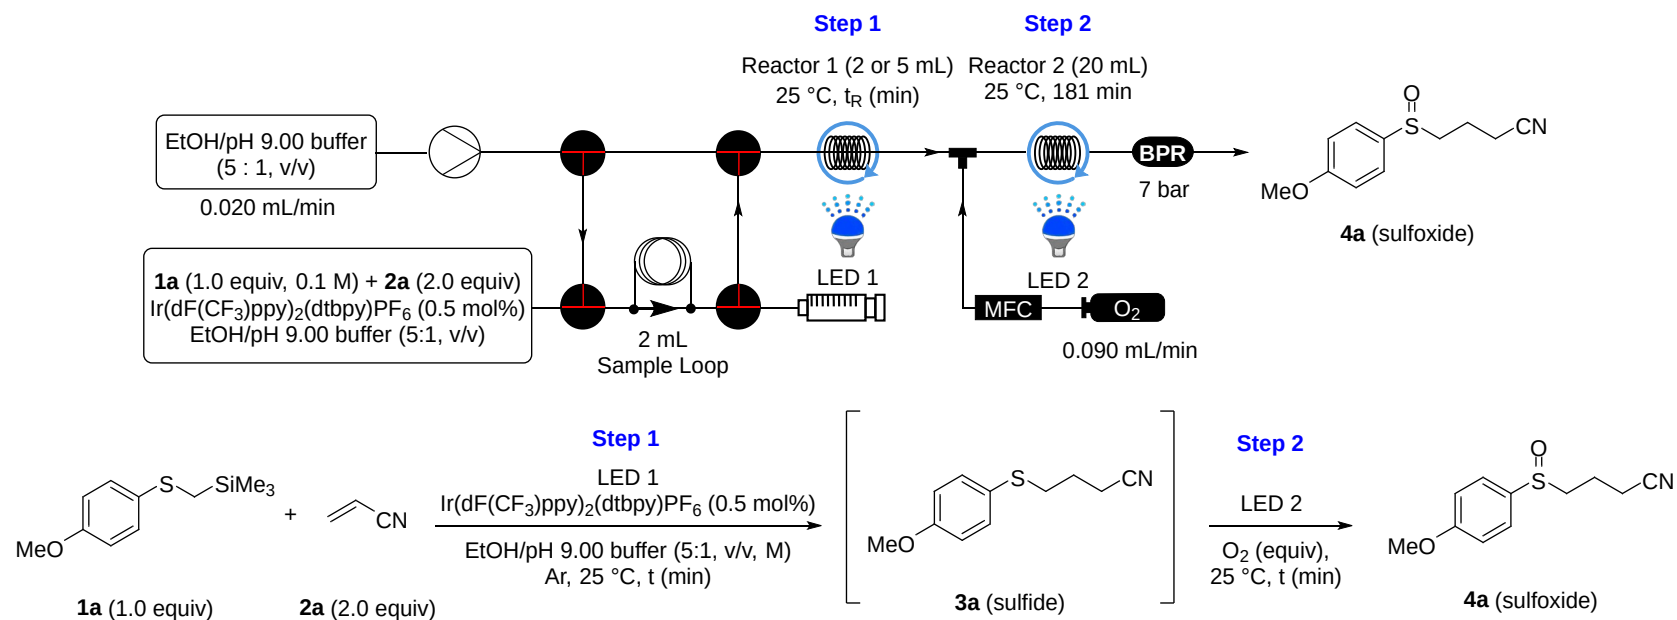


	Specification
Power	5 W
Voltage	12 V
Wavelength	452.4 nm

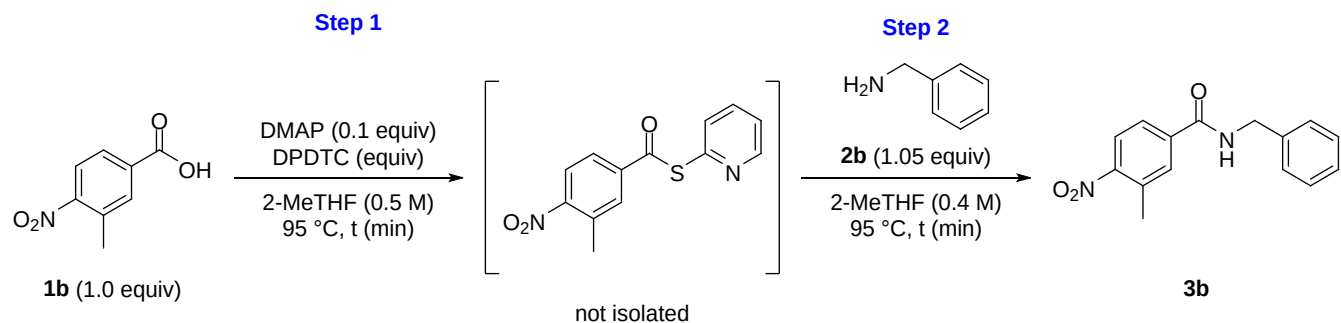

Entry	Step 1 (min)	Step 2 (min)	c (M)	Tubing ID (mm)	Tubing ID (inch)	LED 1	LED 2	1a/2a (mL/min)	O ₂ (mL/min)	O ₂ (equiv)	BPR (bar)	System pressure (bar)	4a (NMR yield %)	Note
1	180	360	0.10	-	-	452 nm	452 nm	-	-	-	-	-	95 ^a	<i>Green Chem.</i> 2025 , Batch
2	40	15	0.05	1.00	0.04	Vapourtec 450 nm	Vapourtec 450 nm	0.125	1.700	12.4	1.4	2.1	90 (88) ^a	<i>Green Chem.</i> 2025 , Flow
3	100	181	0.10	1.00	0.04	Vapourtec 450 nm	Blue strip	0.020	0.090	2.0	7.0	5.1 - 5.4	97 (94) ^a	Flow pilot set 1, 3
4	250	181	0.10	1.00	0.04	Vapourtec 450 nm	Blue strip	0.020	0.090	2.0	7.0	5.2 - 5.6	98	Flow pilot set 2

NMR yield unless otherwise noted; ^a Isolated yield

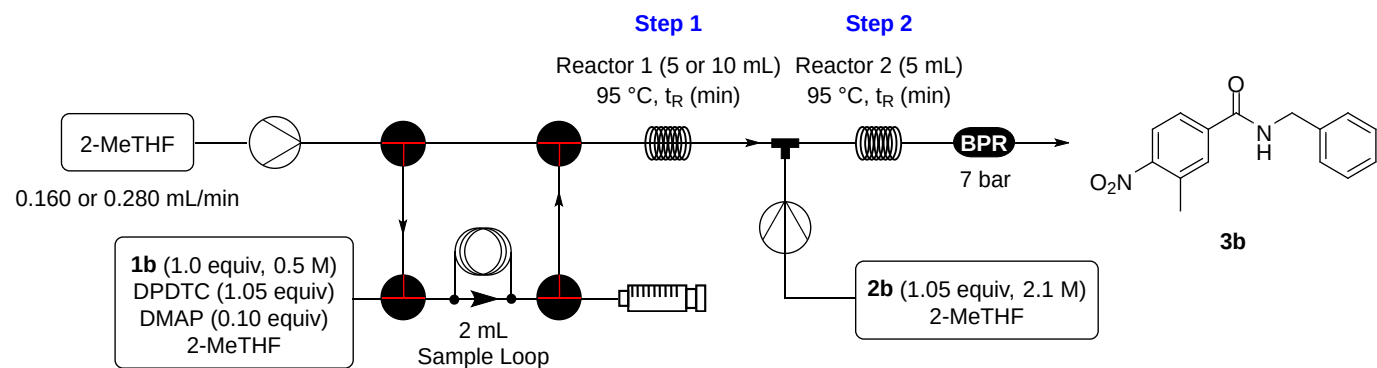

Entry	DPDTC (equiv)	Step 1 (min)	Step 2 (min)	Tubing ID (mm)	Tubing ID (inch)	1b (mL/min)	2b (mL/min)	BPR (bar)	System pressure (bar)	3b (NMR yield %)	Note
1	1.10	30	30	-	-	-	-	-	-	98 (quant) ^a	ACS sustainable Chem. Eng. 2025 , Batch
2	1.05	30	30	0.75	0.03	0.043	0.020	4.0	-	97 ^a	ACS sustainable Chem. Eng. 2025 , Flow
3	1.05	31.3	25	2.40	0.093	0.160	0.040	7.0	5.2 - 5.3	86 (84) ^a	Flow pilot set 1
4	1.05	35.7	14.3	2.40	0.093	0.280	0.070	7.0	5.5 - 5.8	68	Flow pilot set 2, 3

NMR yield unless otherwise noted; ^a Isolated yield

