



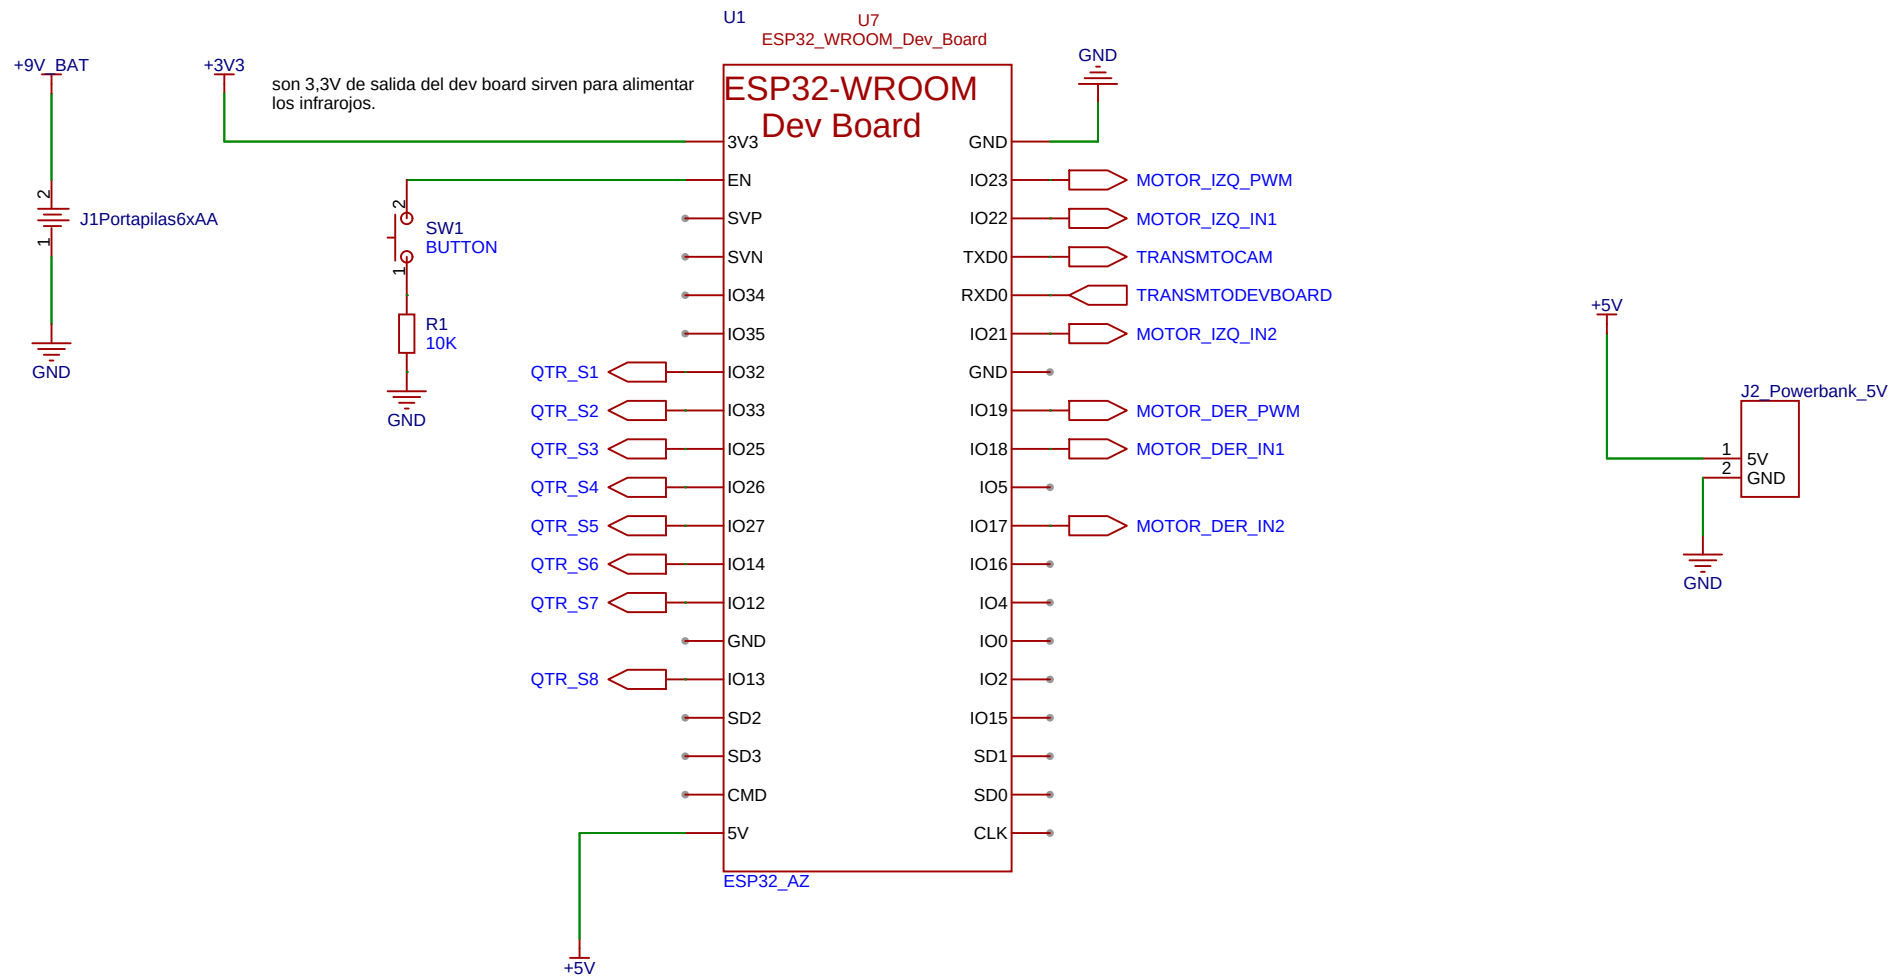

La asignación de pines se ha elegido priorizando el orden físico del cableado y la facilidad de montaje. El pin IO12 se utiliza como entrada/salida para el sensor QTR-8RC, evitando conexiones externas que fuercen su estado durante el arranque.

El portapilas de 9 V alimenta la etapa de potencia de motores.
La powerbank de 5 V alimenta la electrónica de control.
No unir +9V_BAT con +5V.
Todas las masas GND estan todas conectadas internamente con una es suficiente


Schematic	Schematic1			Create at	2026-05-07
Board	Board1			Update at	2026-05-08
Drawn		ROBOBET_Esquema_Electrico			
Reviewed					
		Version	Size	Page 1 Total 4	
EasyEDA		V1.0	A4	EasyEDA.com	

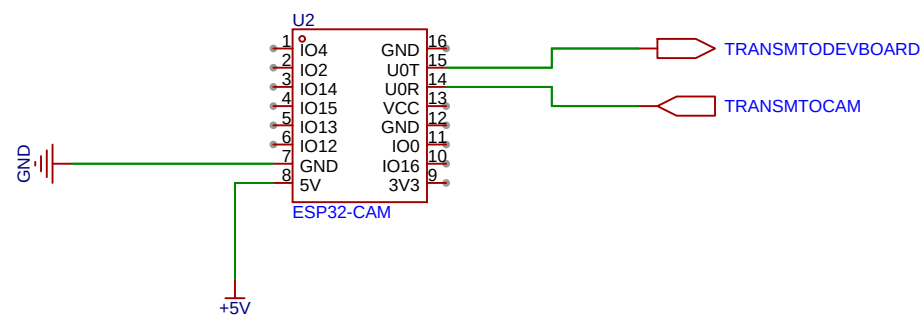

La ESP32-CAM se alimenta desde la powerbank de 5 V y se comunica con el servidor mediante WiFi.


Schematic	Schematic1			Create at	2026-05-08
				Update at	2026-05-08
Board	Board1			Page	P2_Camara_ESP32CAM
Drawn		ROBOBET_Esquema_Electrico			
Reviewed					
		Version	Size	Page 2 Total 4	
		V1.0	A4	EasyEDA.com	

el ledon nos puede servir para que los leds no brillen tanto (asi como resumen del datasheet)

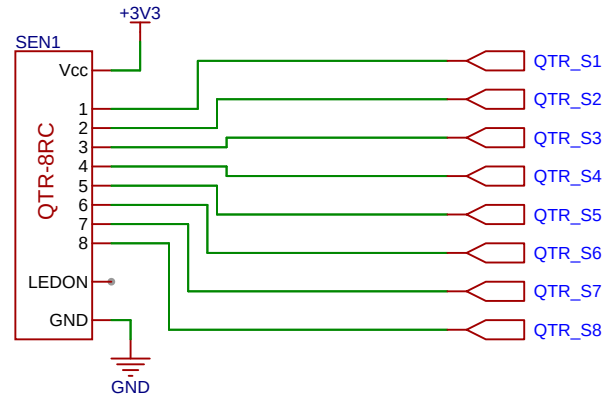

El QTR-8RC se alimenta a 3,3 V para mantener compatibilidad lógica con el ESP32. LEDON queda conectado a +3V3 para mantener activos los emisores IR.

Schematic	Schematic1			Create at	2026-05-08
				Update at	2026-05-08
Board	Board1			Page	P3_Sensor_Linea_QT R8RC
Drawn		ROBOBET_Esquema_Electrico			
Reviewed					
		Version	Size	Page 3 Total 4	
		V1.0	A4	EasyEDA.com	

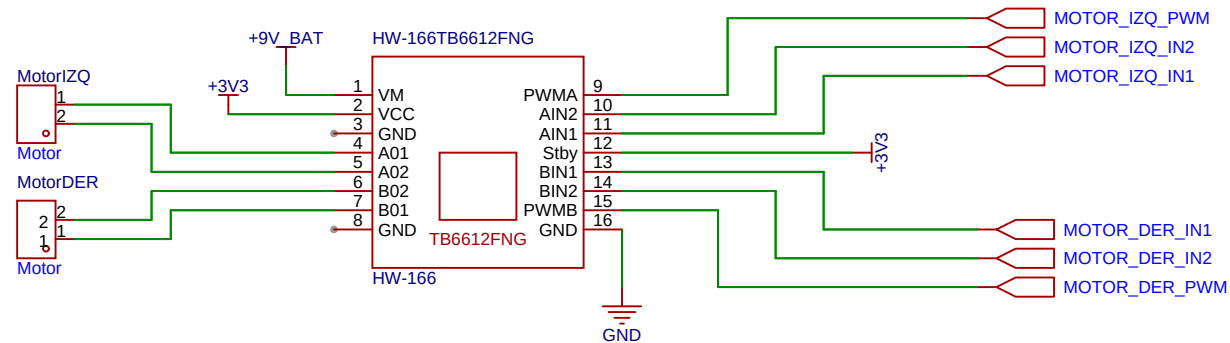

Schematic	Schematic1			Create at	2026-05-08
				Update at	2026-05-18
Board	Board1			Page	P4_Driver_Motores_D C
Drawn		ROBOBET_Esquema_Electrico			
Reviewed					
		Version	Size	Page 4 Total 4	
EasyEDA		V1.0	A4	EasyEDA.com	