


User Guide

1. Upload configuration file

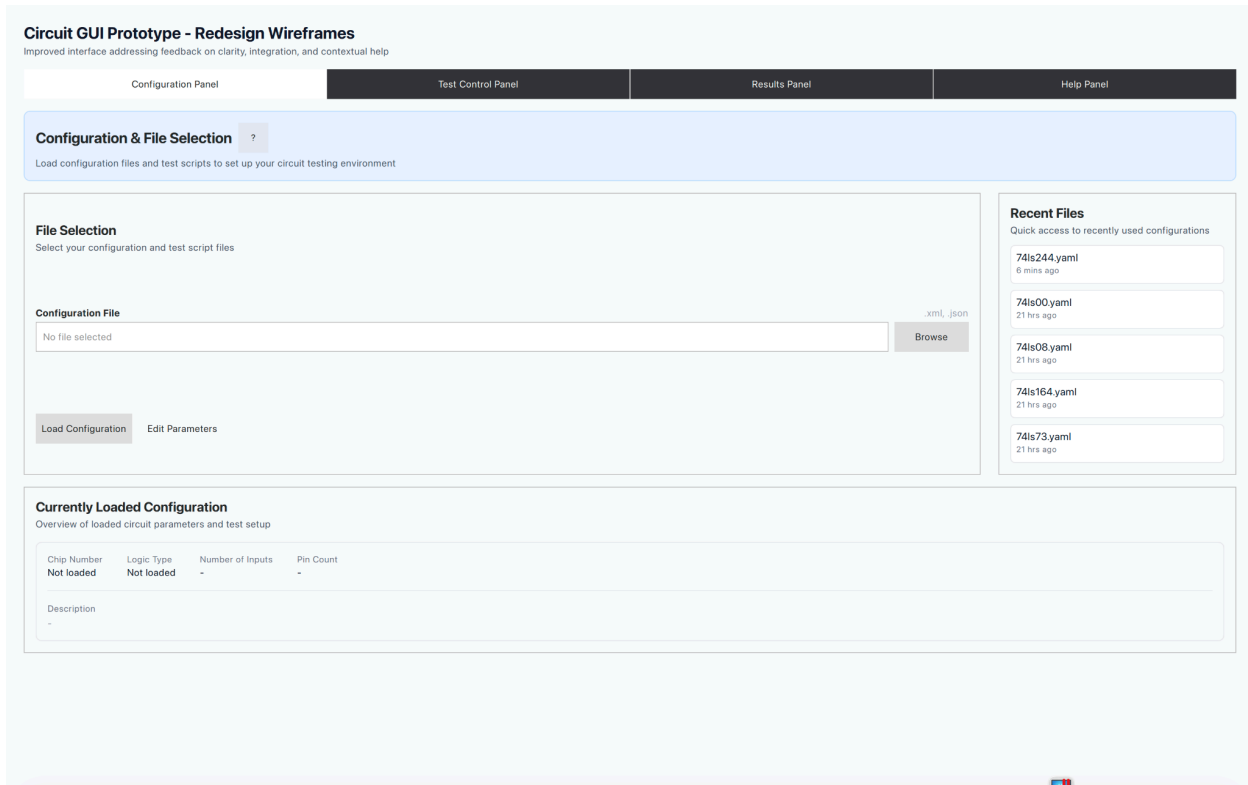


Either:

- Click one of the recent files that you want to use if there are any
- Click browse and pick a YAML IC config file

Then, click load configuration

2. Navigate to Test Control Panel

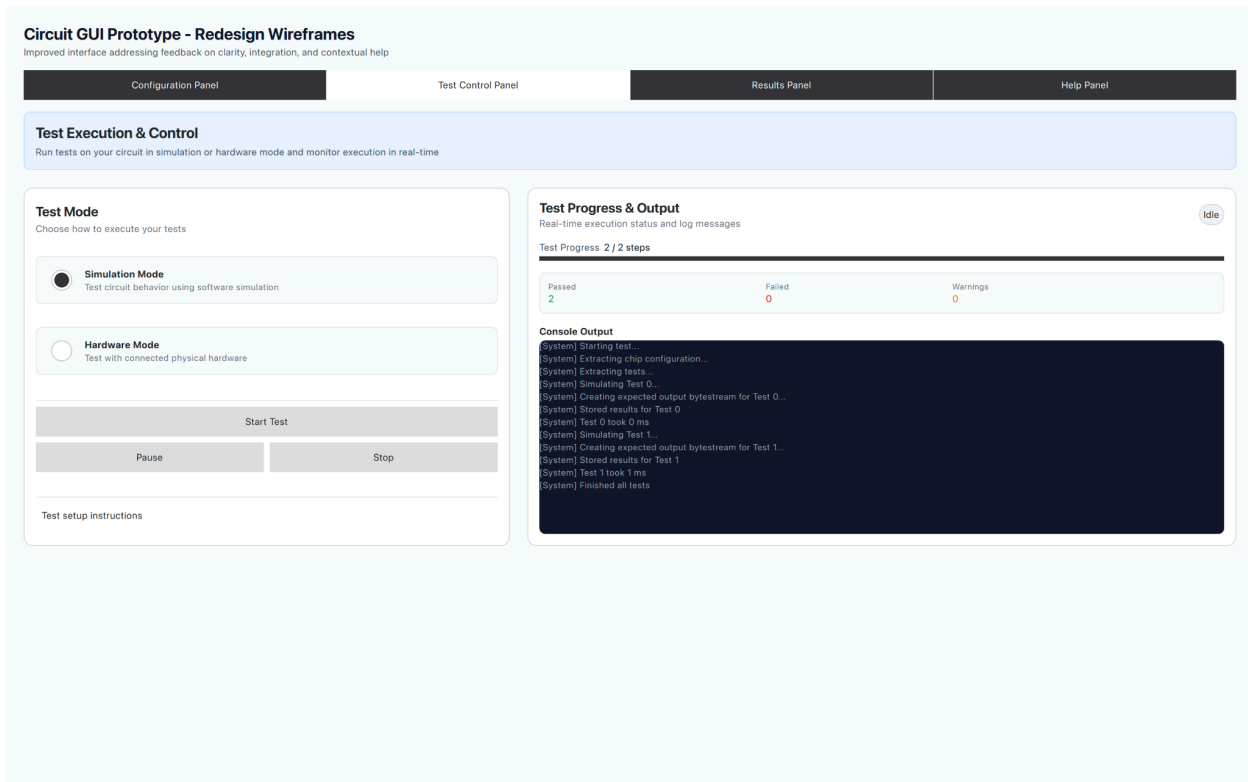

Choose either simulation or hardware mode

- Simulation just gives all correct outputs and is used for testing the application backend logic
 - Works even without MCU hardware present
- Hardware mode actually runs the tests on the IC connected to the MCU hardware
 - Works only if MCU hardware actually connected

Then click start test and watch console to see test status. Can pause or stop the test using the pause/stop buttons.

3. Navigate to results panel

Circuit GUI Prototype - Redesign Wireframes

Improved interface addressing feedback on clarity, integration, and contextual help

Configuration Panel

Test Control Panel

Results Panel

Help Panel

Test Results & Reports

Review test outcomes, truth tables, pin mappings, and generate simple reports for demos or documentation.

T

Total Tests

2

P

Passed

2

F

Failed

0

%

Success Rate

100.0%

Detailed Results

View truth tables, pin information, individual test results, and export a simple report.

Export CSV

Export JSON

Export PDF Report

Loaded 2 results

Ready

Truth Table

Pin Mapping

Test Results

Inputs	Output	Expected	Status
1:0, 2:1, 4:1, 6:1, 8:1, 11:1, 13:1, 15:1, 17:1, 19:0	11111111	11111111	PASS
1:0, 2:0, 4:0, 6:0, 8:0, 11:0, 13:0, 15:0, 17:0, 19:0	00000000	00000000	PASS

Latest Test Summary

A quick overview of the most recent run, including warnings, failures, and useful notes.

Circuit GUI Prototype - Redesign Wireframes

Improved interface addressing feedback on clarity, integration, and contextual help

Configuration Panel

Test Control Panel

Results Panel

Help Panel

Test Results & Reports

Review test outcomes, truth tables, pin mappings, and generate simple reports for demos or documentation.

T

Total Tests

2

P

Passed

2

F

Failed

0

%

Success Rate

100.0%

Detailed Results

View truth tables, pin information, individual test results, and export a simple report.

Export CSV

Export JSON

Export PDF Report

Loaded 2 results


Ready

Truth Table

Pin Mapping



Test Results

Pin Number	Function	Alias	Description
1	I	OE	Channel 1 output enable
2	I	A	Channel 1, A side 1
3	O	Y	Channel 2, Y side 4
4	I	A	Channel 1, A side 2

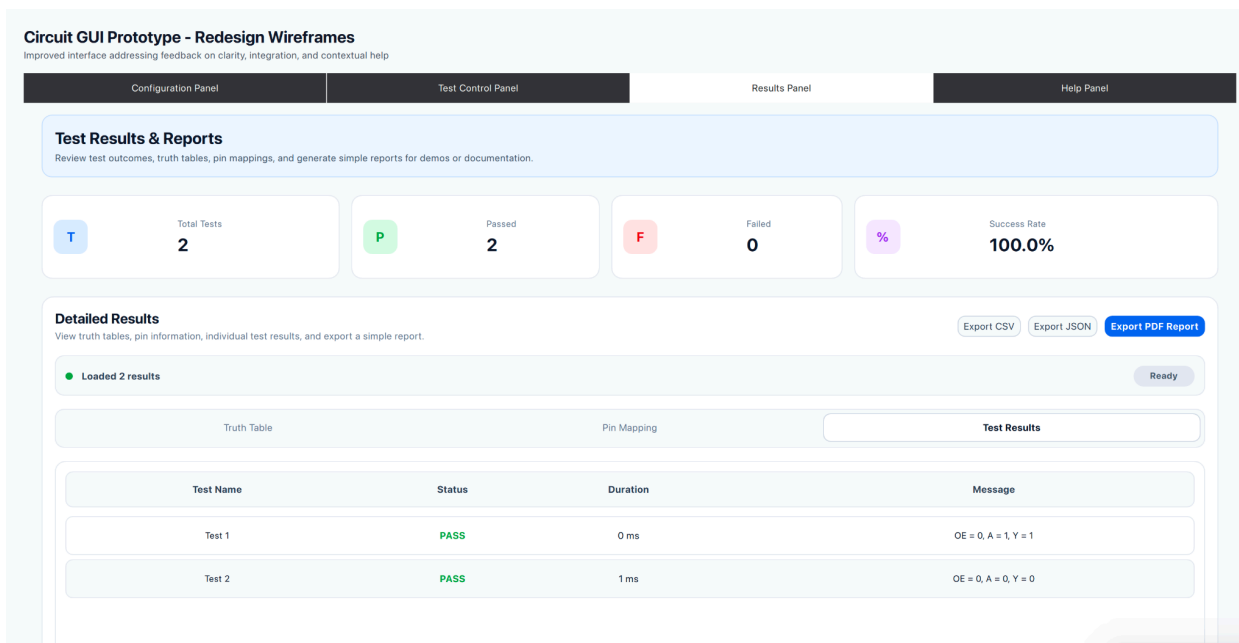

Look at all 3 of the result tables to understand the tests run and what the results were

4. Click export PDF report and open the generated PDF

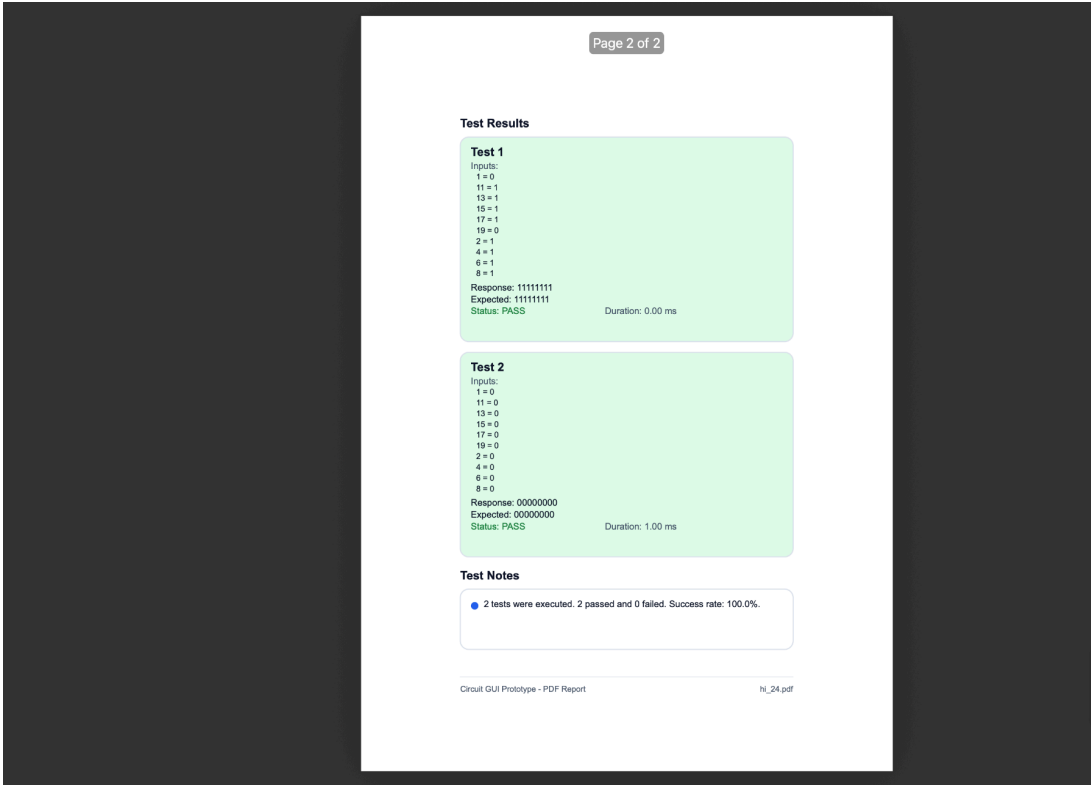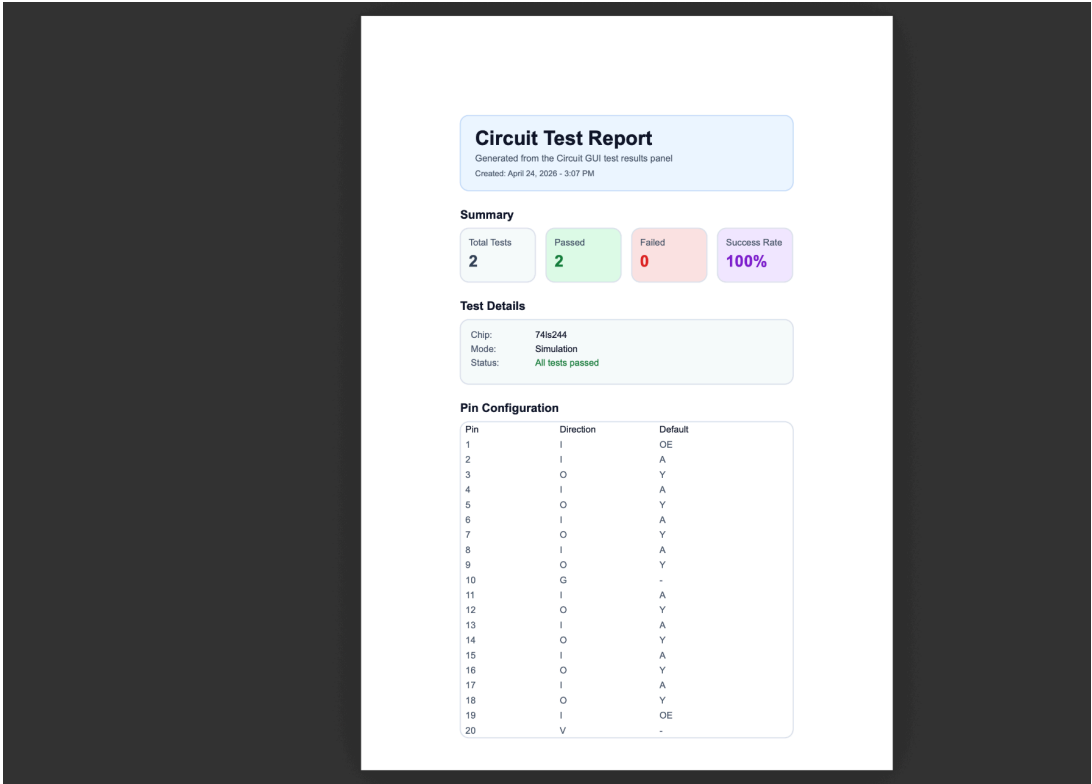

5. Navigate to help panel at any point if you're confused

Circuit GUI Prototype - Redesign Wireframes

Improved interface addressing feedback on clarity, integration, and contextual help

Configuration Panel

Test Control Panel

Results Panel

Help Panel

Help & Documentation

Learn how to use the Circuit GUI Prototype - from setup to analysis

Quick Start: Testing Workflow

Follow these steps to test your circuit configuration

1

Step 1 Load Configuration

Navigate to the Configuration Panel and select your circuit configuration file (.xml or .json) and test script file (.txt or .script).

2

Step 2 Execute Tests

Go to the Test Control Panel, choose between Simulation or Hardware mode, and click "Start Test" to run your test script.

3

Step 3 Review Results

View your test results, truth tables, and pin mappings in the Results Panel. Export data as needed for further analysis.

Frequently Asked Questions

Common questions about file types, configuration, and testing

What file types are supported?

What's the difference between Simulation and Hardware mode?

How do I configure circuit parameters?

How do I interpret truth table results?

Can I export my test results?

Quick Reference

Key terminology and concepts

Configuration Terms

Testing Terms