
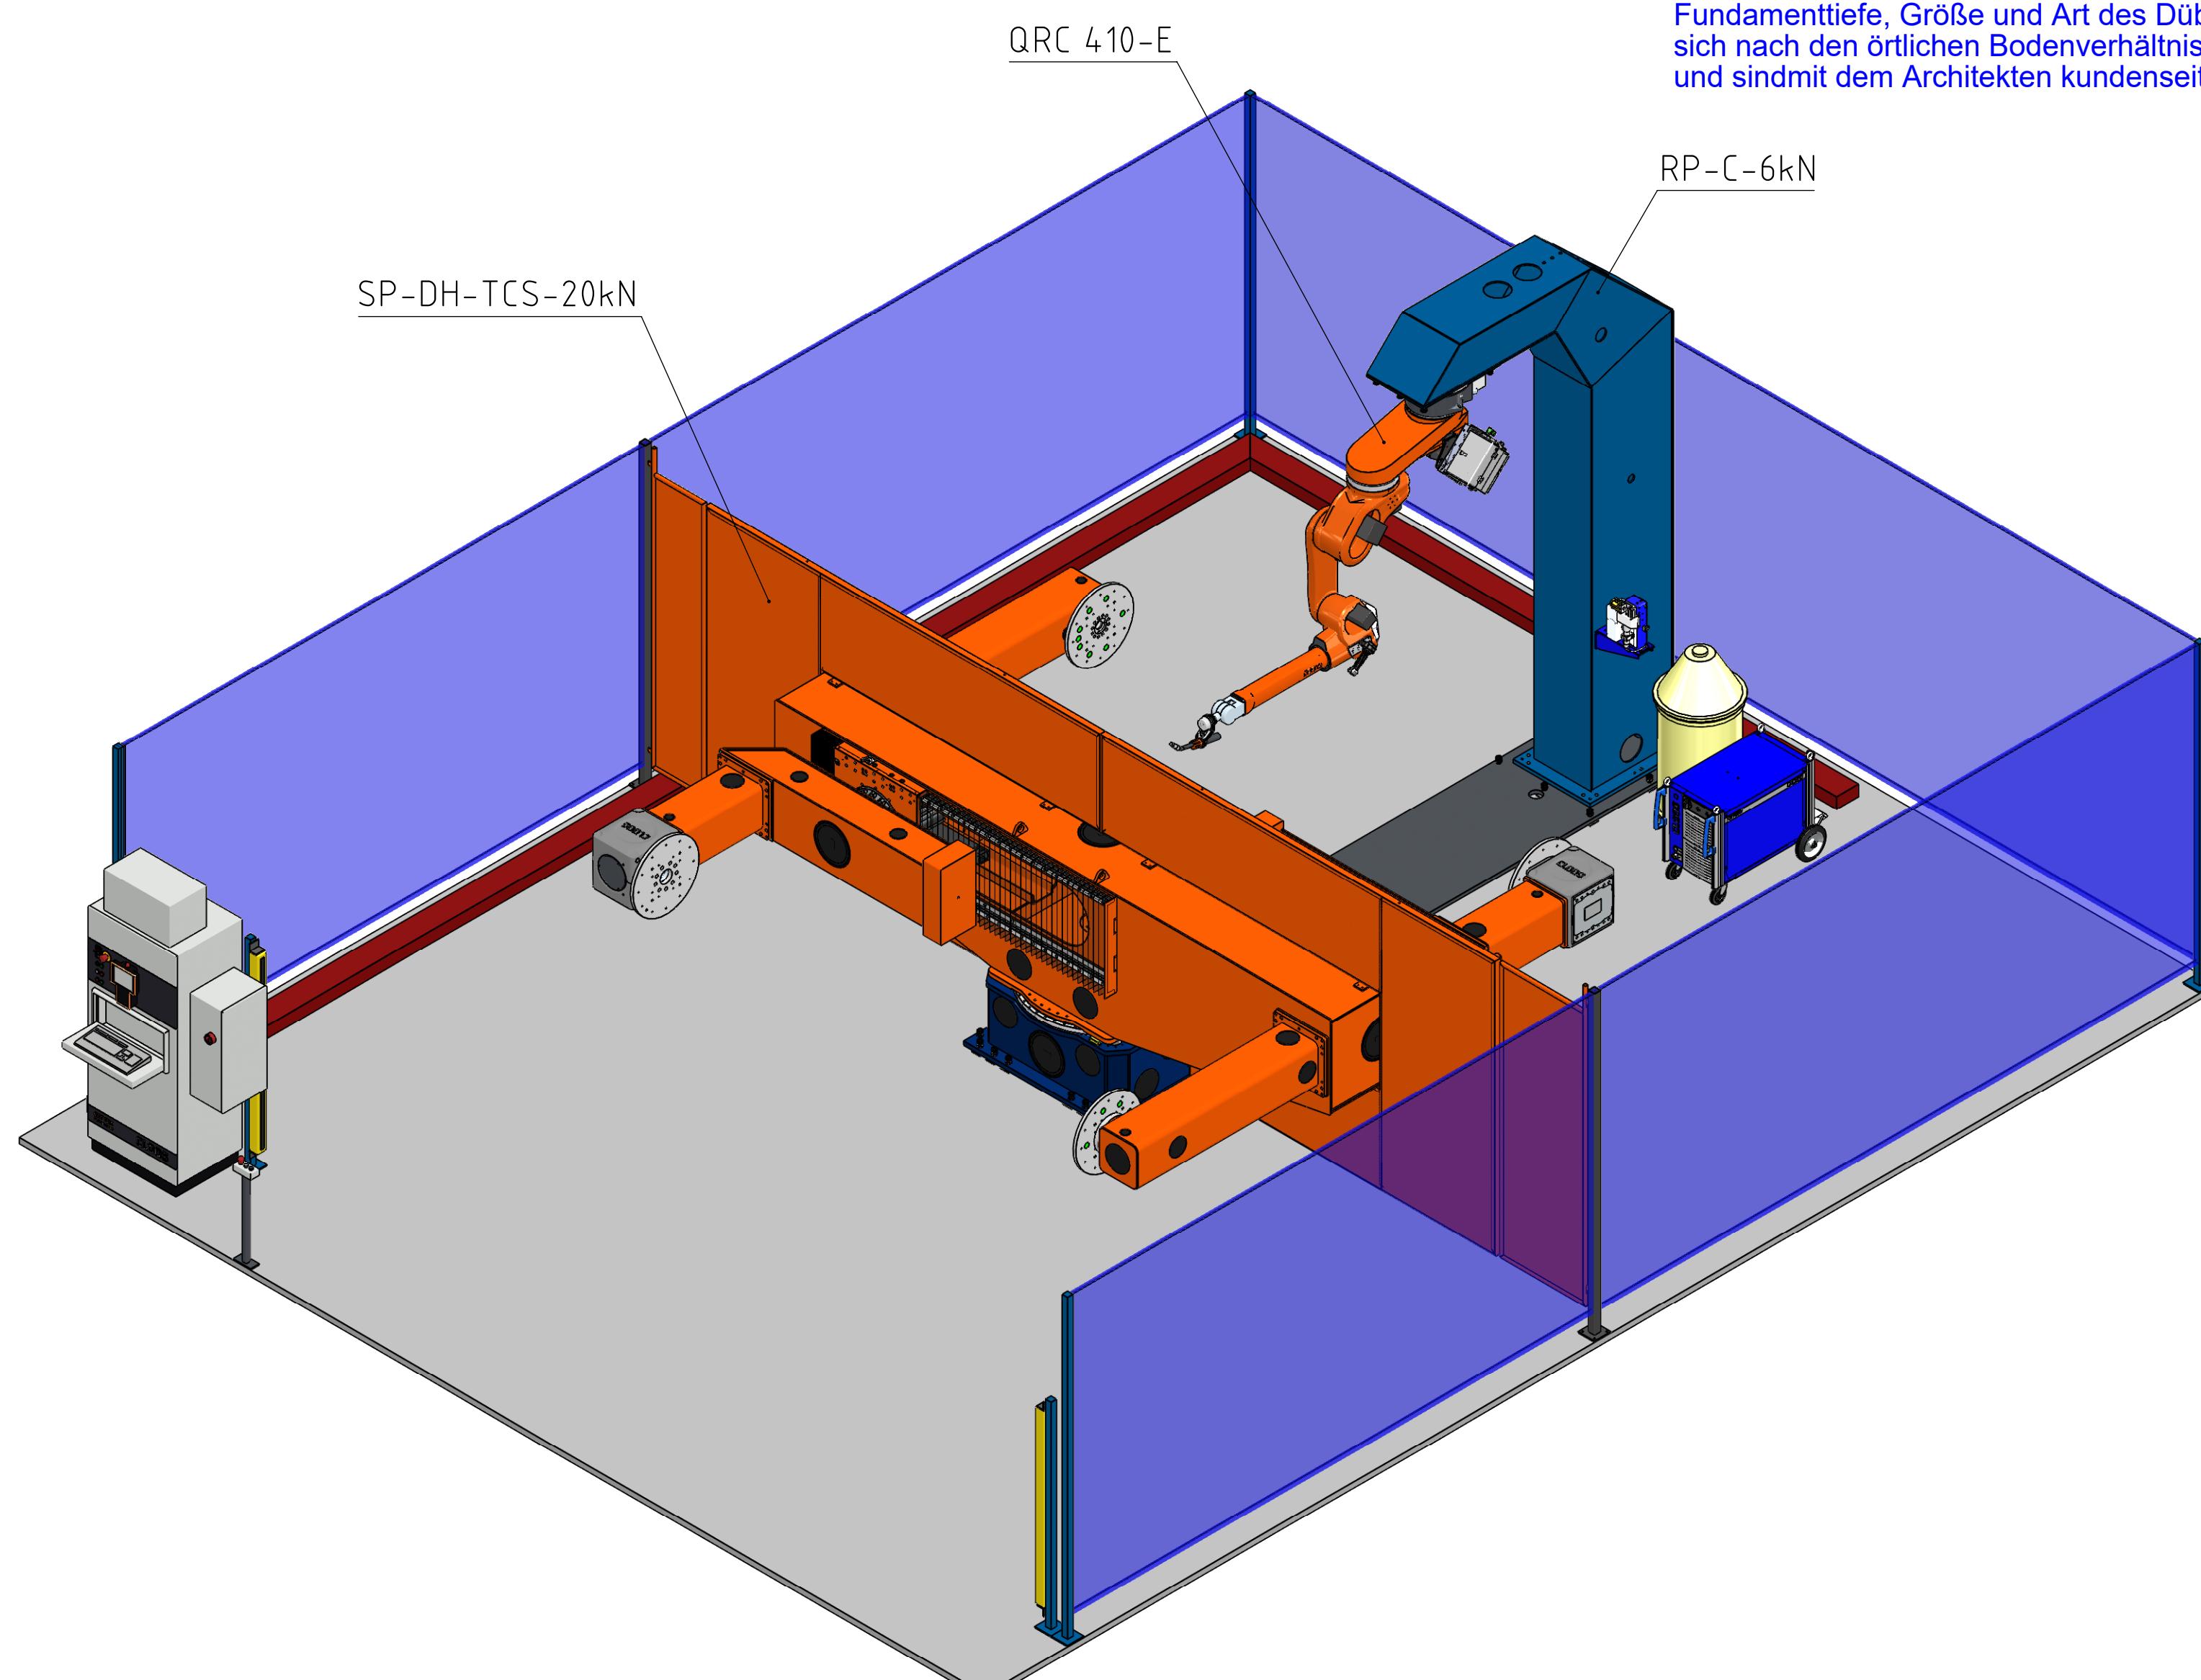


Befestigungsprinzip Einstellschraube

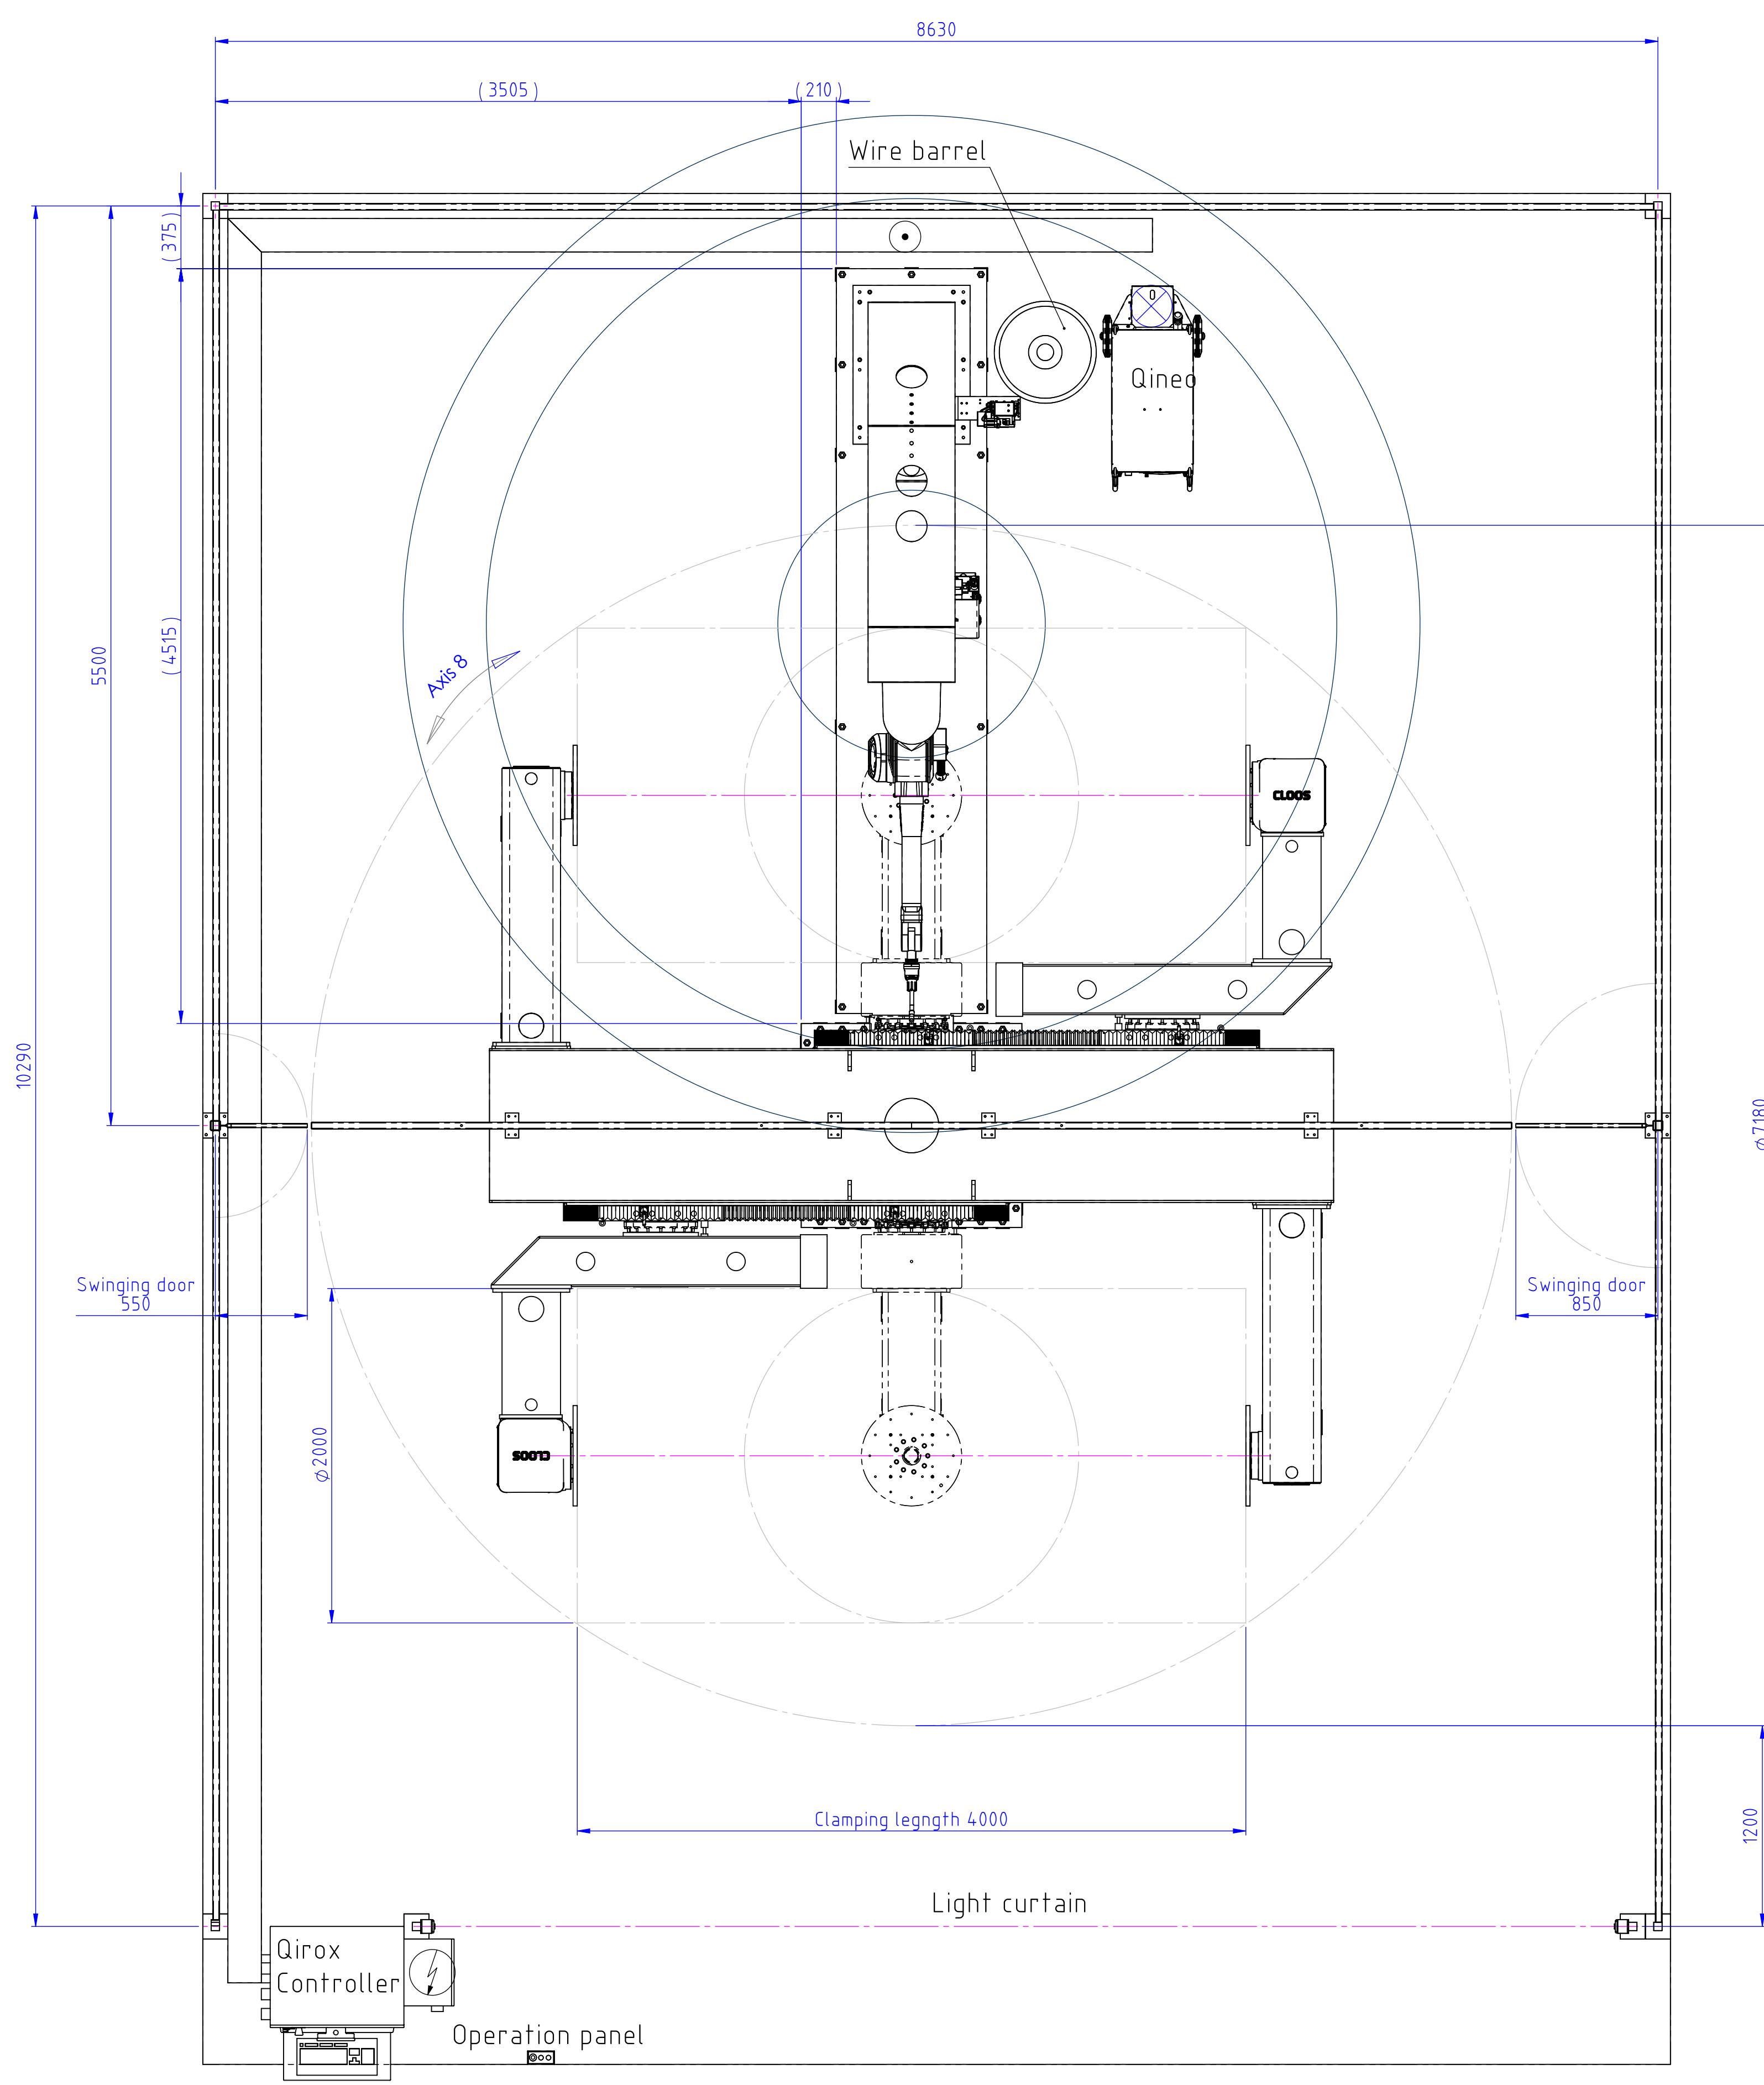

Fixing principle adjusting screw

Foundation depth size, dowel size and type are depending on the soil conditions. These are to be determined by the customer with the architect.

Schutzaun Beisstellung Cloos Benelux (Zaunhöhe=2700mm, Bodenfreiheit=175mm)
Kabelkanal kundenseitig nach DIN EN 60204-1 mit Potentialausgleich.
Safety fence provided by Cloos Benelux (Fence height=2700mm, ground clearance=175mm)
cable channel provided by customer according to DIN EN 60204-1 with
equipotential bonding.
Startvorwahl fest verdübeln/ Preselection dowel fixed

Stromanschluss 400V (230V) Gesamtleistung 59,5 KVA Electrical connection 400V (230V) Total output 59,5 KVA Alimentation courant 400V (230V) puissance totale 59,5 KVA DIN ISO 1306	Freimafe nach DIN ISO 1306 Datum Name Bearb. 04.02.2020 SEOL Gepr. 31.03.2020 K.-D. Bar Norm
Druckluftanschluss 6 bar Connection for compressed air 6 bar Alimentation air comprimé 6 bar	Schutzauschluss Shielding gas connection Alimentation gaz protecteur
Änderung Datum Name Ursprung M-DIS 10000294358 D-BIS 10000294357 Version 00	Änderung Datum Name Ursprung M-DIS 10000294358 D-BIS 10000294357 Version 00

Anlagenlackierung	
Roboter, Schweißausrüstung nach Cloos-Standard	Grundplatte, Socke RAL 7022 graphite grey
Maschinenteile	Machine parts RAL 5005 signal blue
Beleuchtungsteile, außer Planscheiben	RAL 2004 renorange
Sicherheitseinrichtung	RAL 5005 signal blue
Steuerungsteile	RAL 2004 light grey
Safety equipment	RAL 5005 blue de sécurité
Controllers	RAL 7035 light grey
Special purpose machine	RAL 1012 yellow
Extractive unit, hydraulics unit	RAL 5005 signal blue

Stand: 31.03.2020

Geprüft und genehmigt

Kunde _____

Kom.-Nr. / Angebots-Nr.: _____

Kontakt-nummer _____

Datum _____

Unterschrift _____

Examined and approved

Customer Smulders

Comm. No. / offer number 306 528

Contact number _____

Date _____

Signature _____

Blatt 1 von 1 Bl

10000294357

M-DIS 10000294358 D-BIS 10000294357 Version 00