
GTHT 3☆

HOT & COLD SERIES



INVERTER R-32

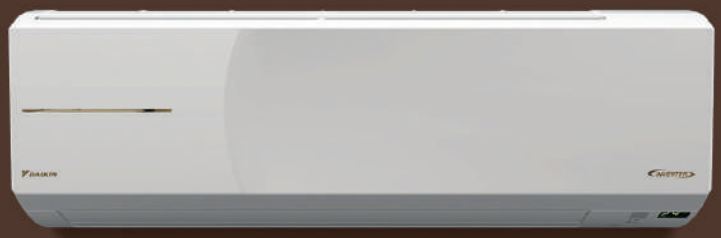

KEY FEATURES

Available in Cooling (kW): 3.52, 5.0, 6.0, 7.03
Available in Heating (kW): 3.52, 5.0, 6.0, 7.03

Good Sleep off Timer
For comfort during sleep

Dew Clean Technology
For better airflow & consistent cooling

Triple Display
For monitoring and control

Inner Grooved Pipe
Oscillatory Refrigerant motion for better heat dissipation

Air Throw 22 Mtr (72 Ft)*
Uniform and faster cooling

Power Full
Immediate relief from hot & cold temperature

Heating & Cooling Function Operation -10°C to 54°C
Auto Heating and cooling for year around comfort

Filter Clean Indicator
Ensures timely filter upkeep

Self Diagnosis
For Hassle Free Operation

PRODUCT DETAILS

Model Name	IDU	GTHT35XV16WAA	GTHT50XV16VAA	GTHT60XV16UAA	GTHT71XV16MAA
	ODU	RHTG35XV16WAA	RHTG50XV16VAA	RHTG60XV16UAA	RHTG71XV16MAA
Rated Cooling Capacity	kW	3.52 / 3.52	5.0 / 5.0	6.0 / 6.0	7.03 / 7.03
ISEER Rating	Wh/Wh	4.40	4.40	4.40	4.40
Rated Annual Power Consumption	kWh	619.02	880.1	1055.07	1238.03
IDU Colour		White with Gold Décor Strip	White with Gold Décor Strip	White with Gold Décor Strip	White with Gold Décor Strip

*Note: Air Throw given for 7.03 kW.

DISCLAIMER - AS A PART OF CONTINUOUS DEVELOPMENT AND UPGRADATION THE PRODUCT IMAGE/ACCESSORY/ FEATURE/SPECIFICATION MAY BE DIFFERENT FROM ACTUAL PRODUCT AT THE TIME OF PURCHASE.

