


ARCHITECTURE PORTFOLIO

ARSLAN QAISER
2018-2025


arslan.qaiser1991@gmail.com

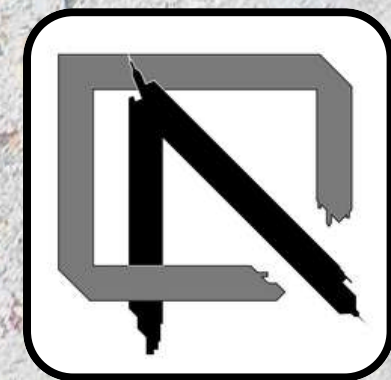


INTRODUCTION

CONTEXT

I'm an **Anarchitect** operating at the intersection of parametric design, BIM coordination, and digital fabrication.

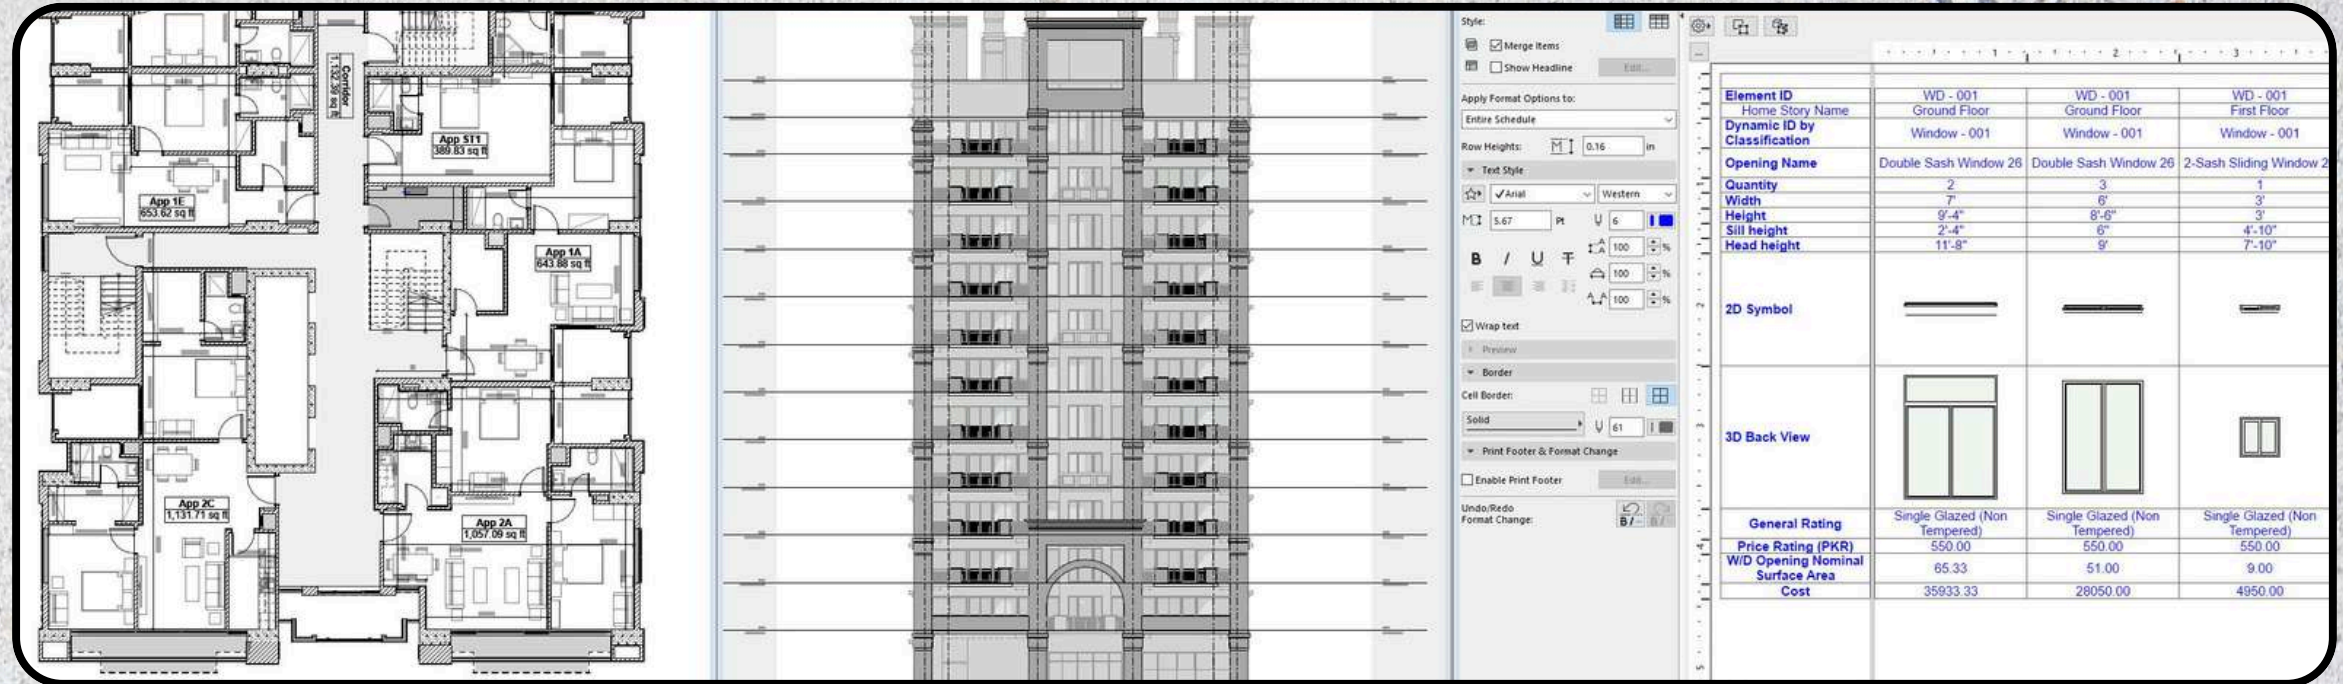

FDI JAMB DETAIL



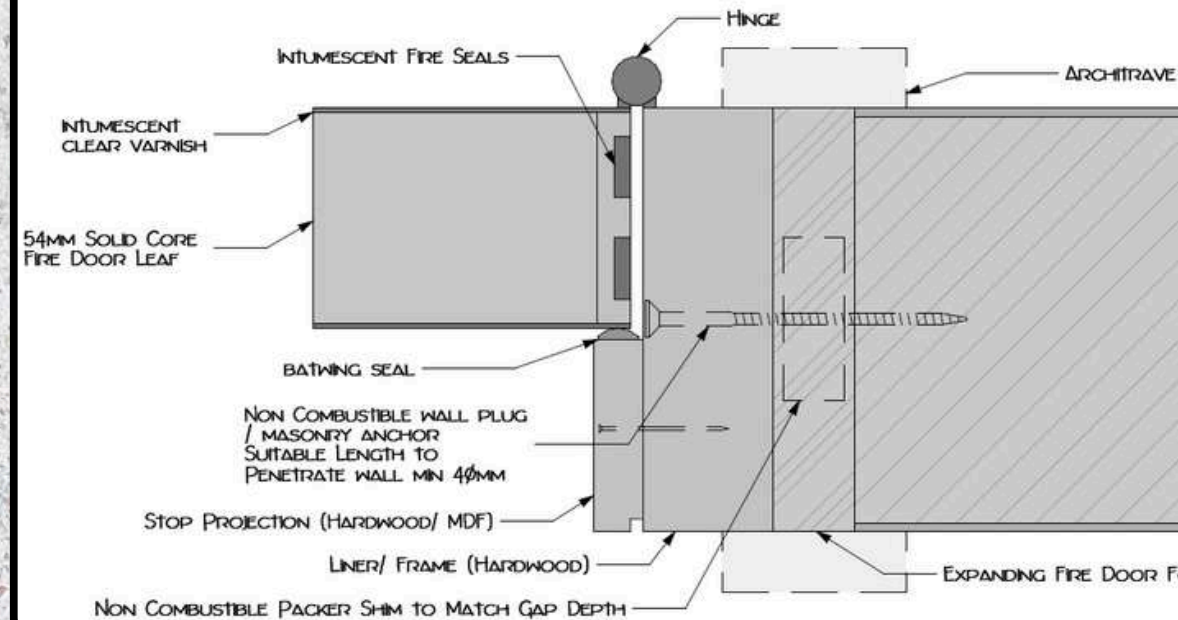


DESIGN PHILOSOPHY



I believe that **Quintessential Architecture** values maintaining the harmony between person, place and space over any short-lived monetary, aesthetic or artistic gain


DESIGN METHODOLOGY



I use **data and logic** to drive form, performance, and material integrity just as deeply as **intuition and emotion**

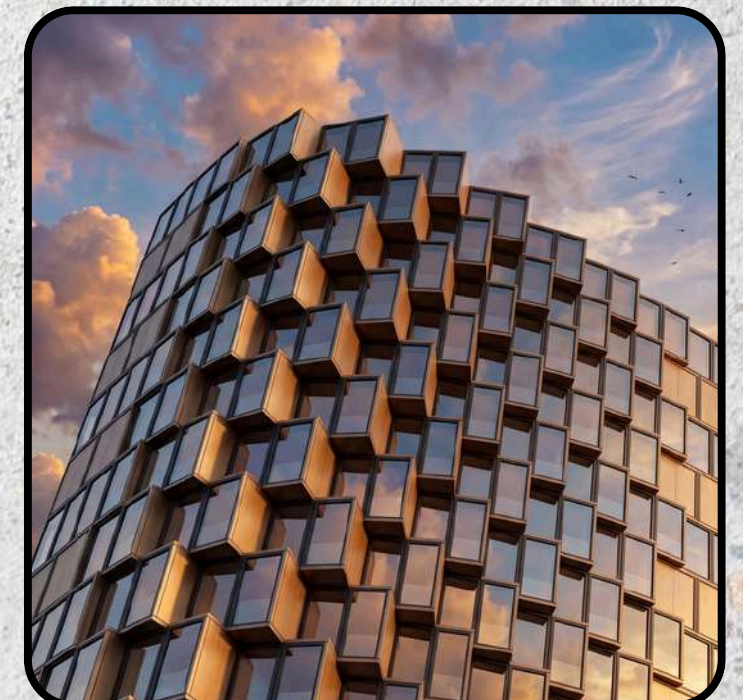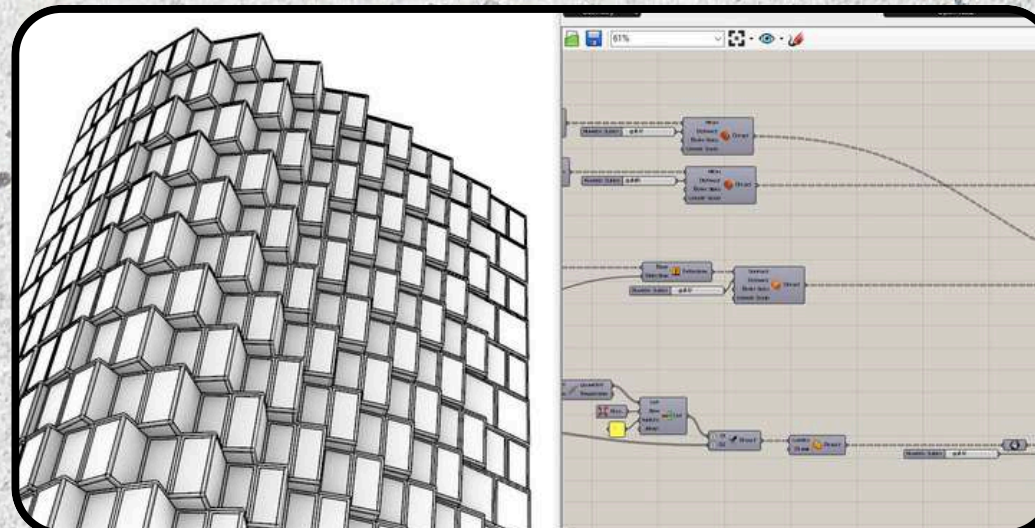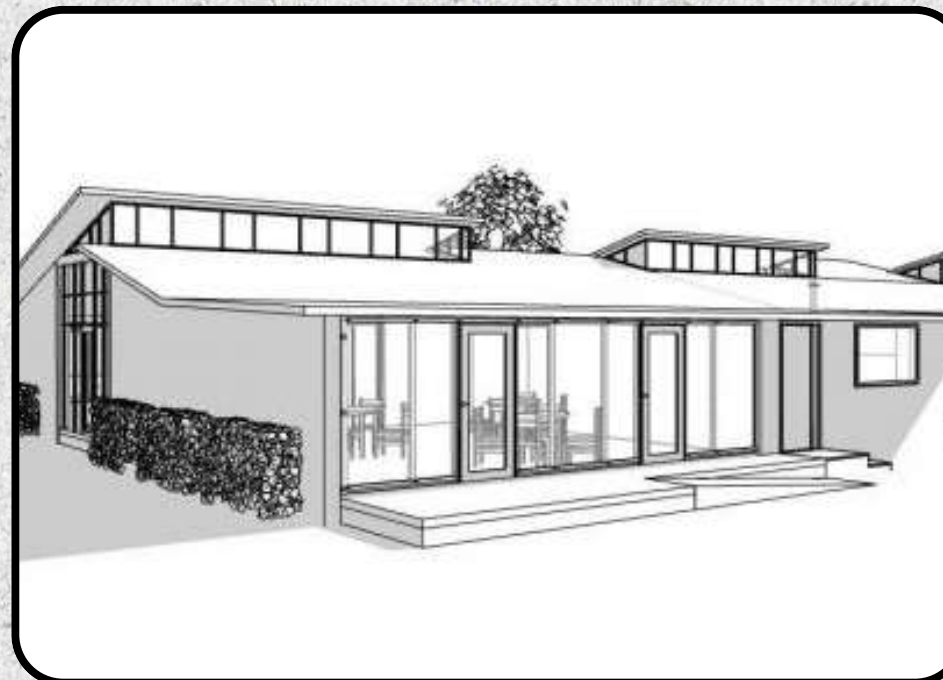

FREE-HAND DRAWINGS

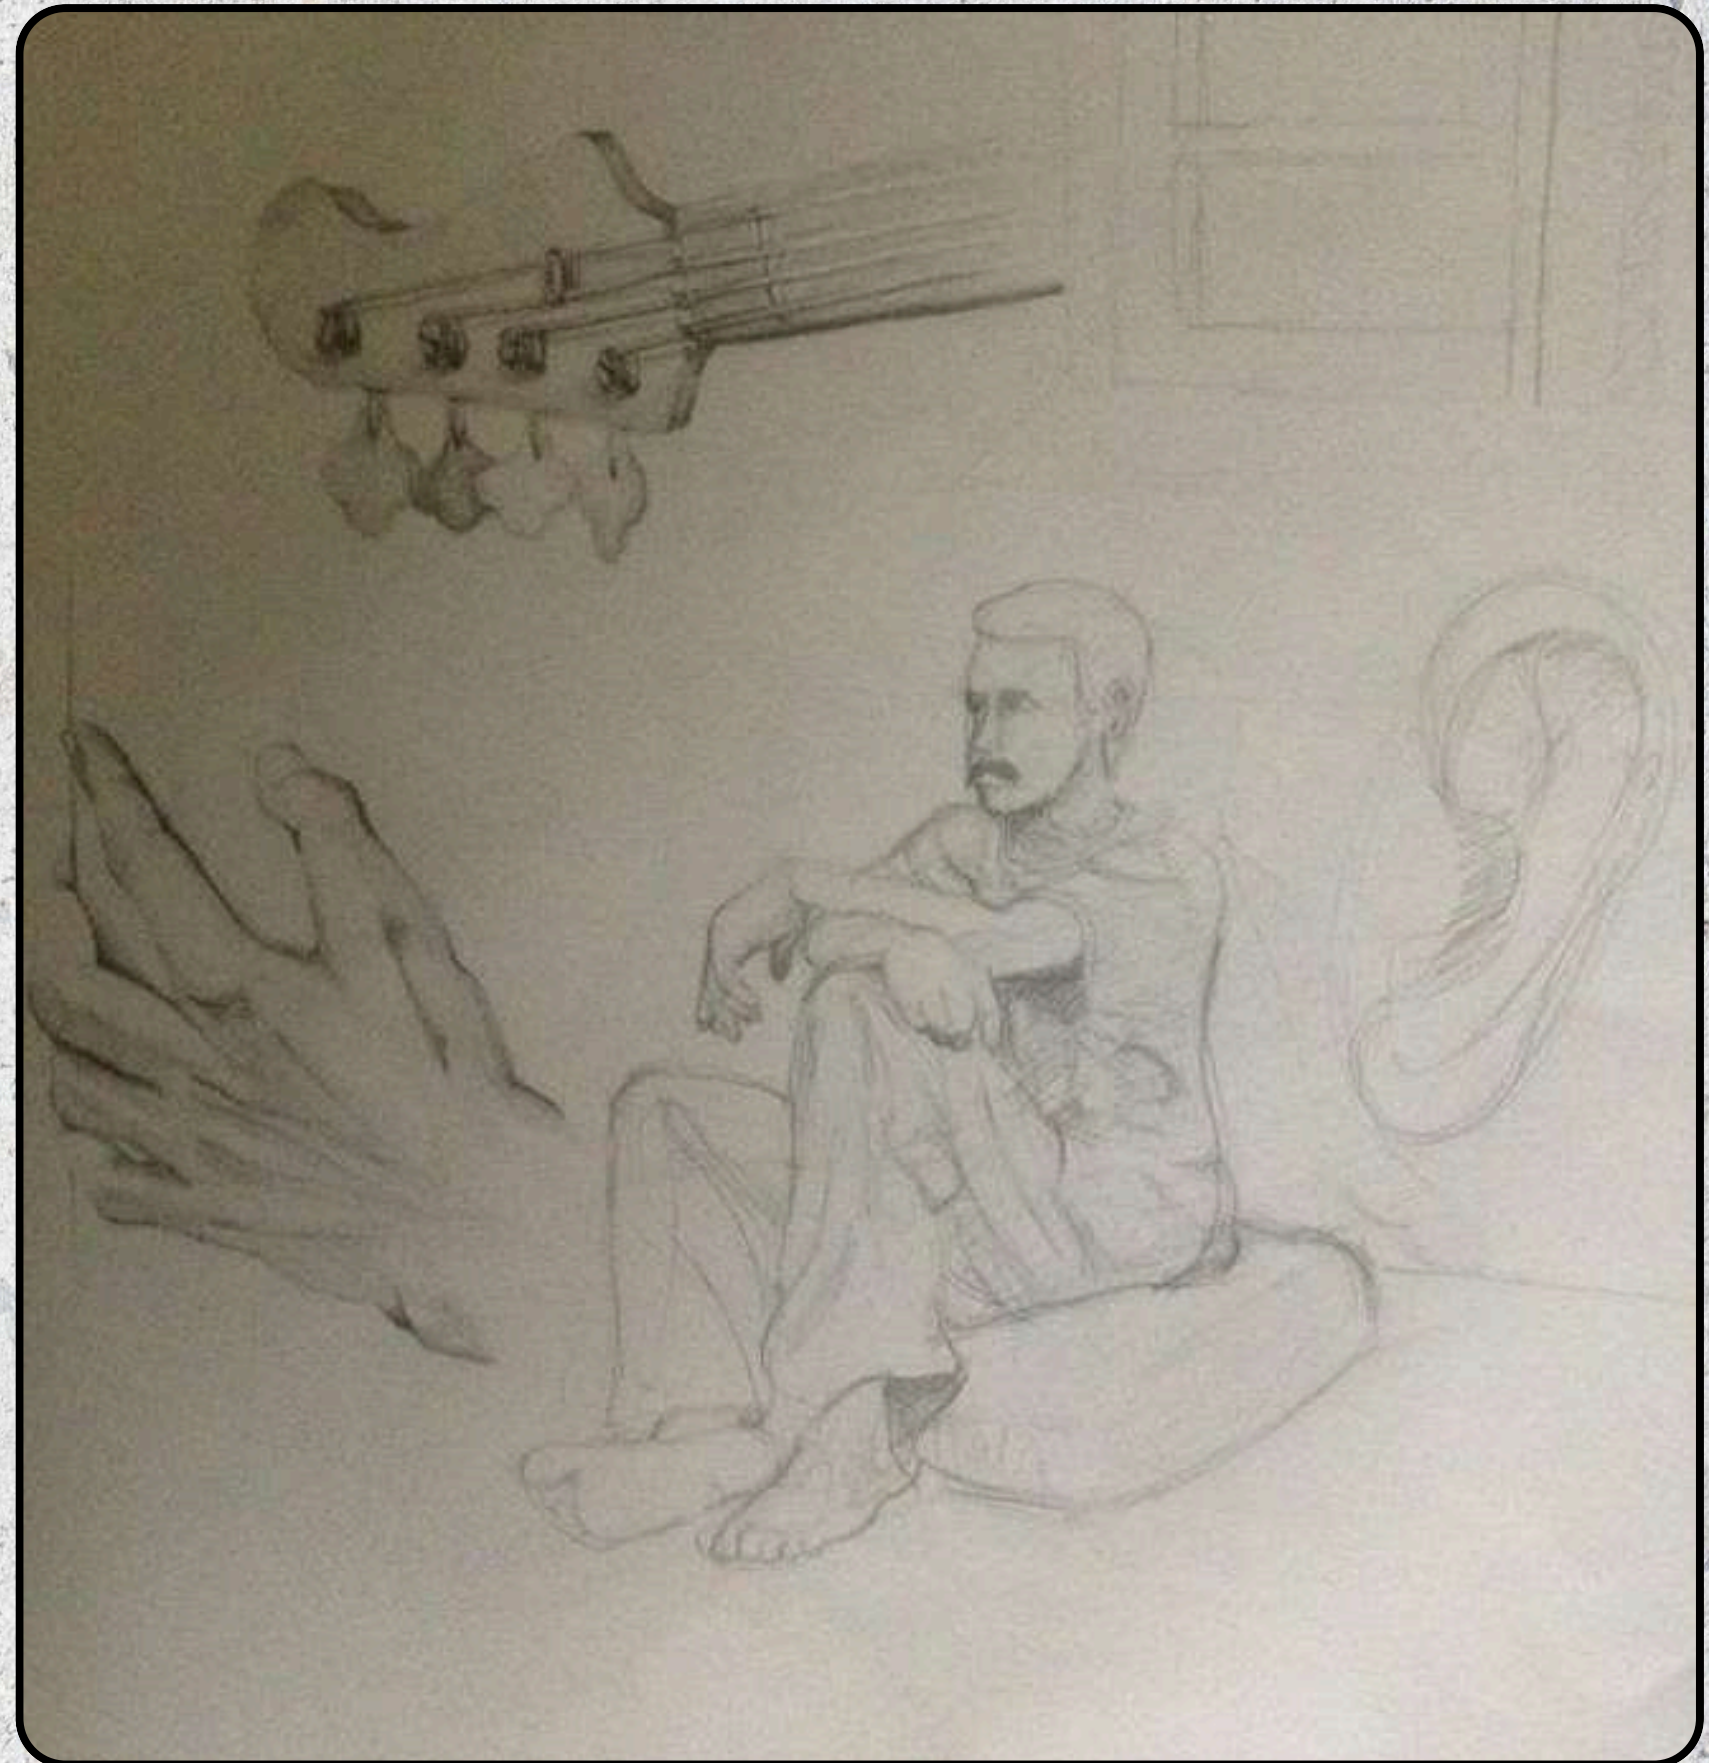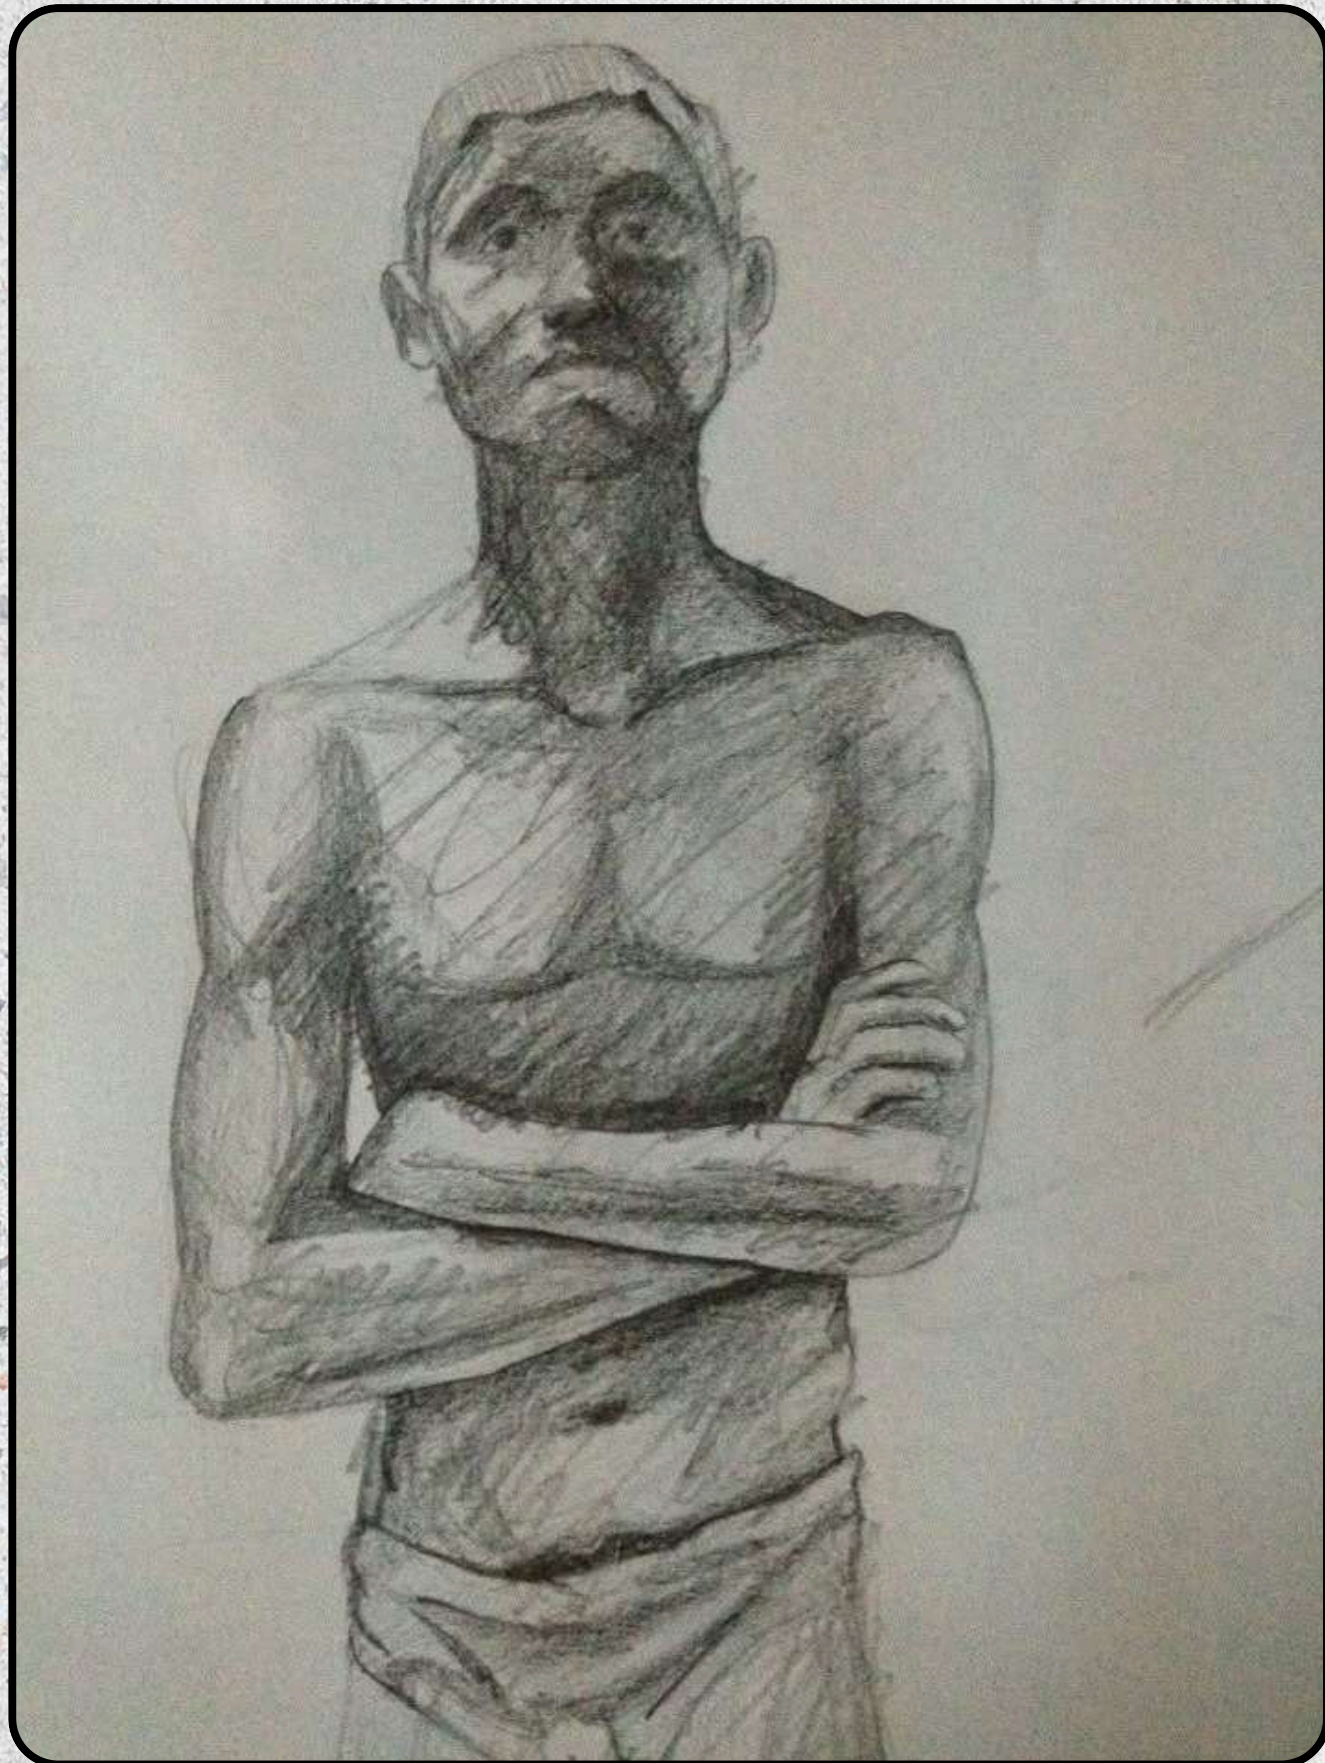

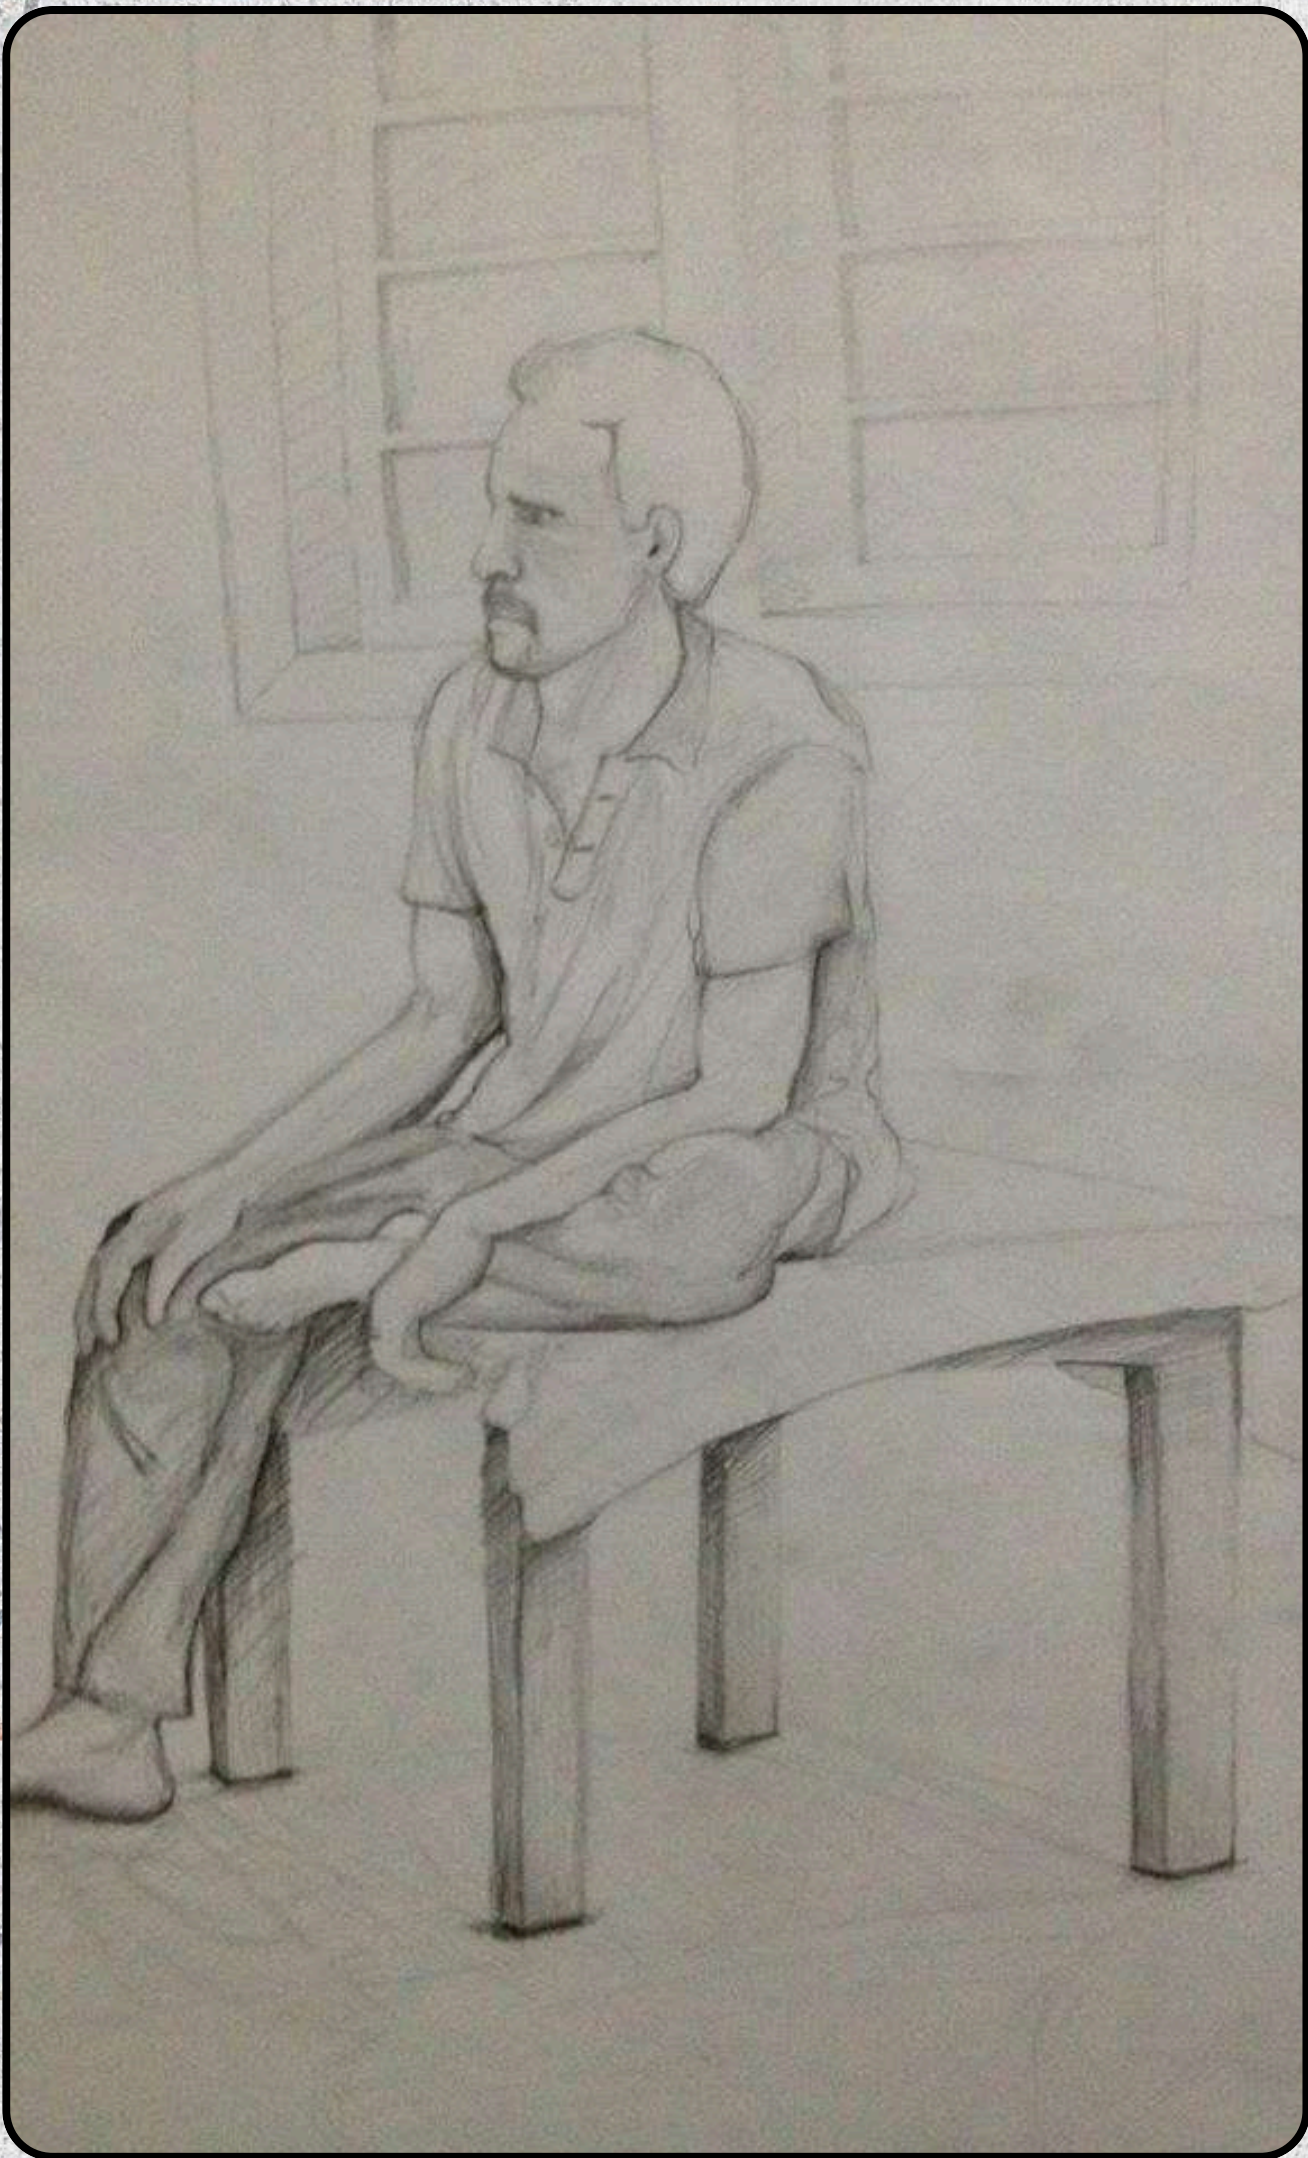


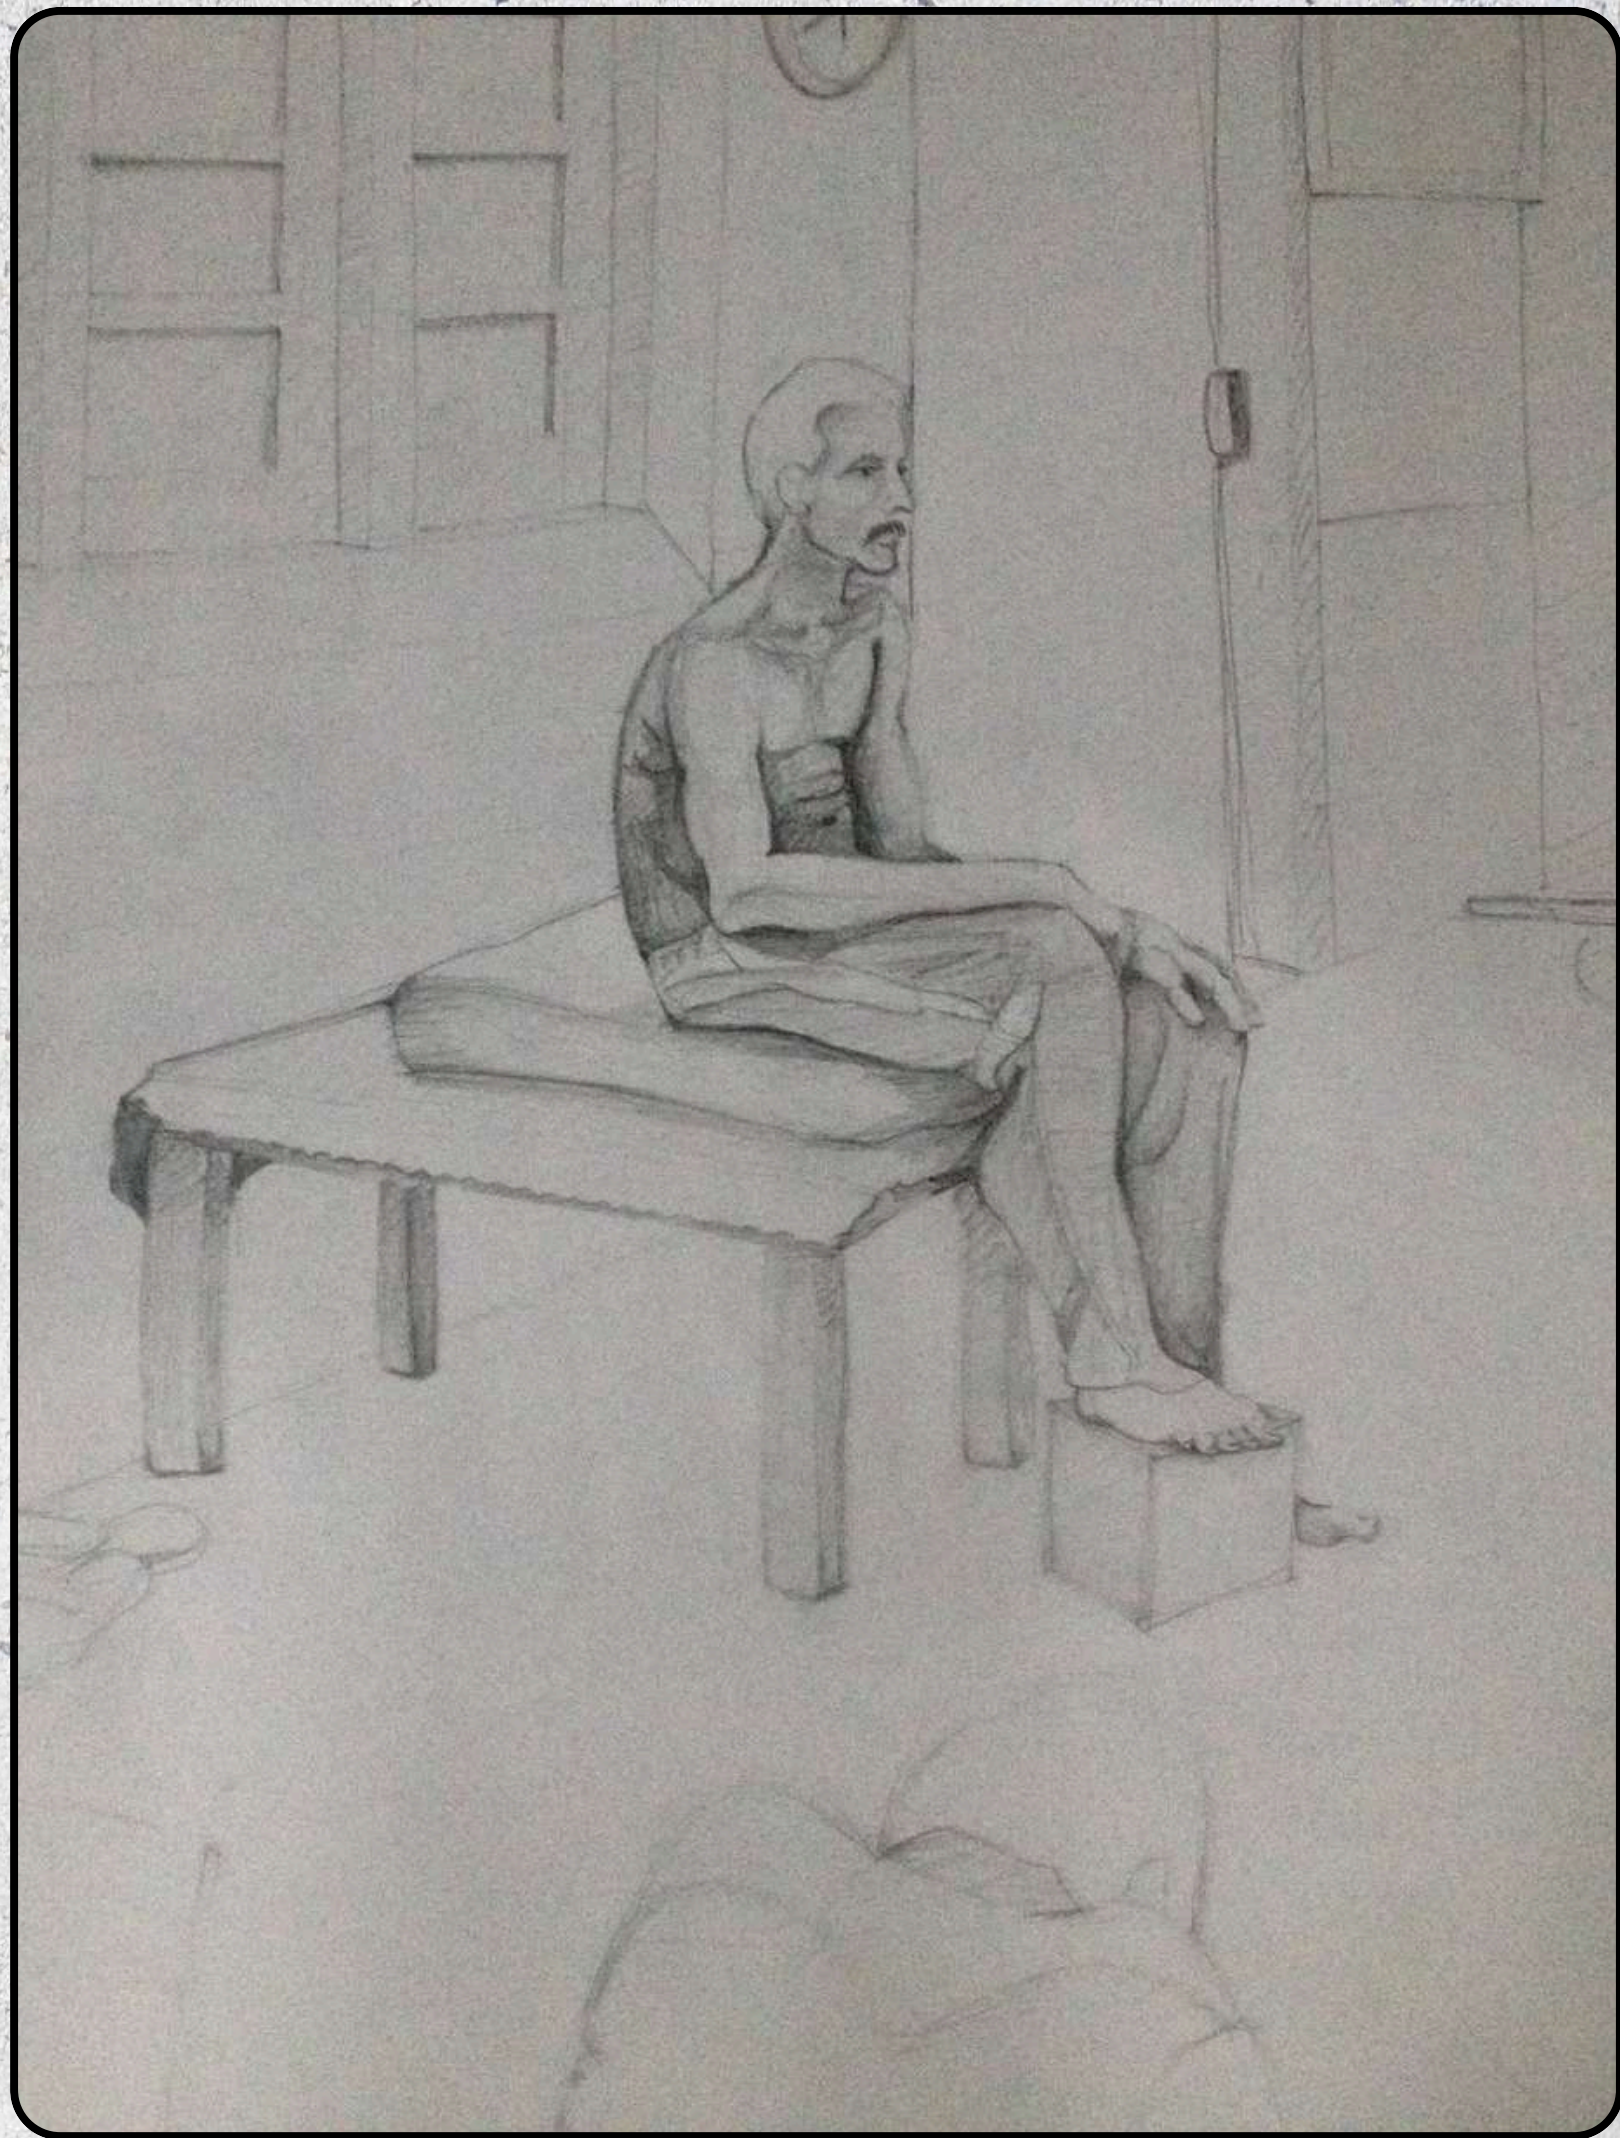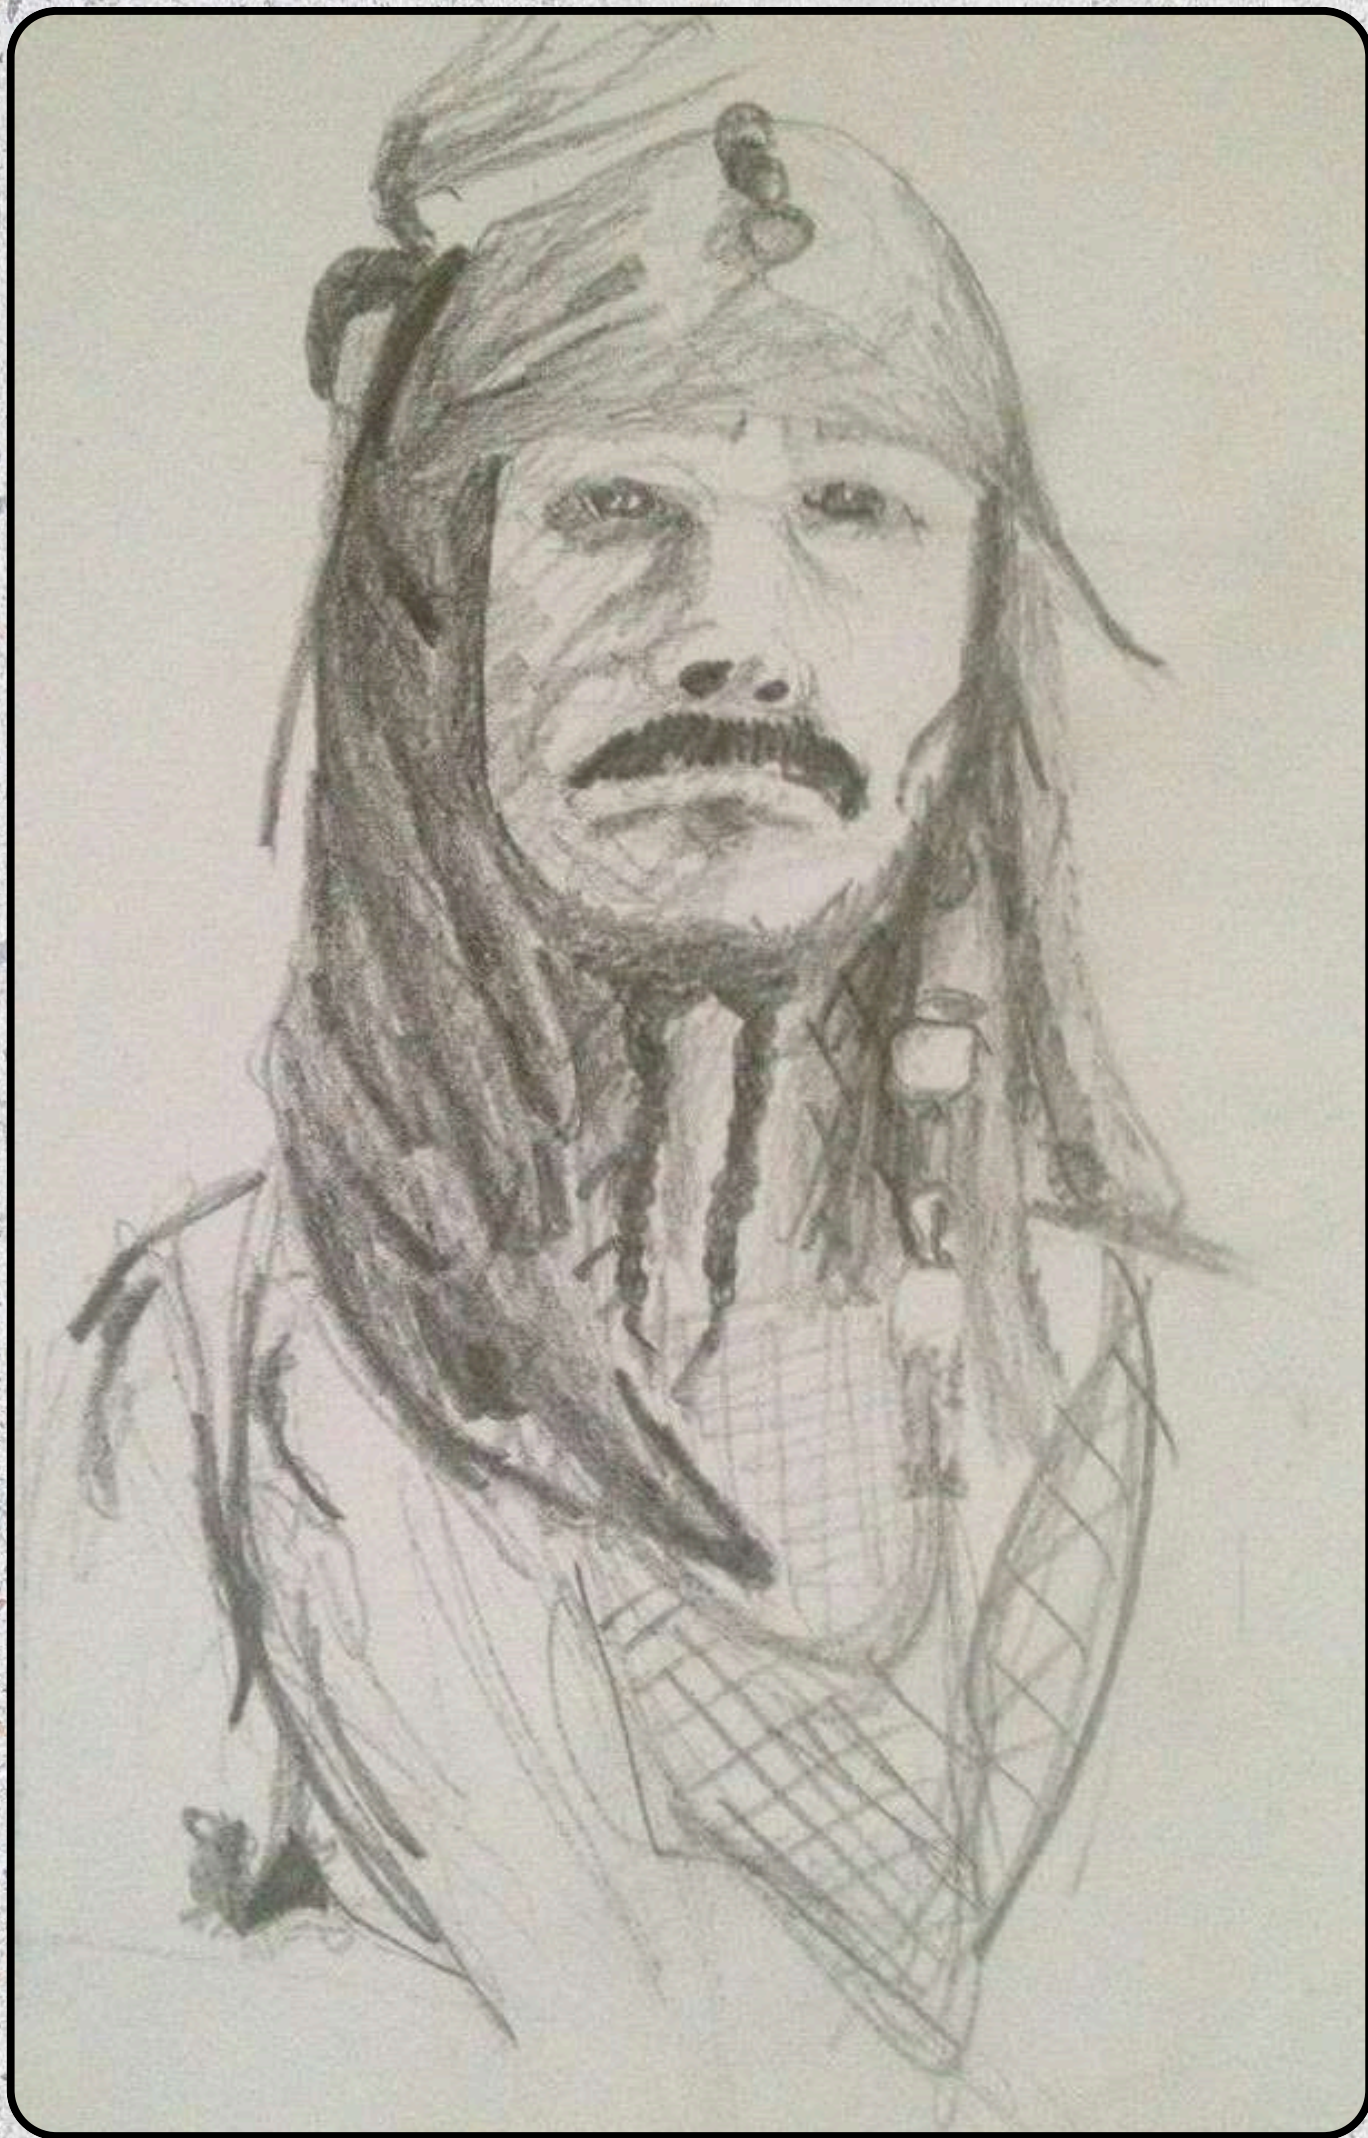

INTERIOR DESIGN

When design meets external briefs, the process becomes an exercise in translation. Success relies on balancing the client's explicit requirements with spatial flow, turning tight parameters into a functional, shared vision. This project in Dubai is a great example. Initially my clients wanted a maximum occupancy of 50 people in the main suite which I strongly urged against. This was later reduced to 30.

VIP LOUNGE - DUBAI

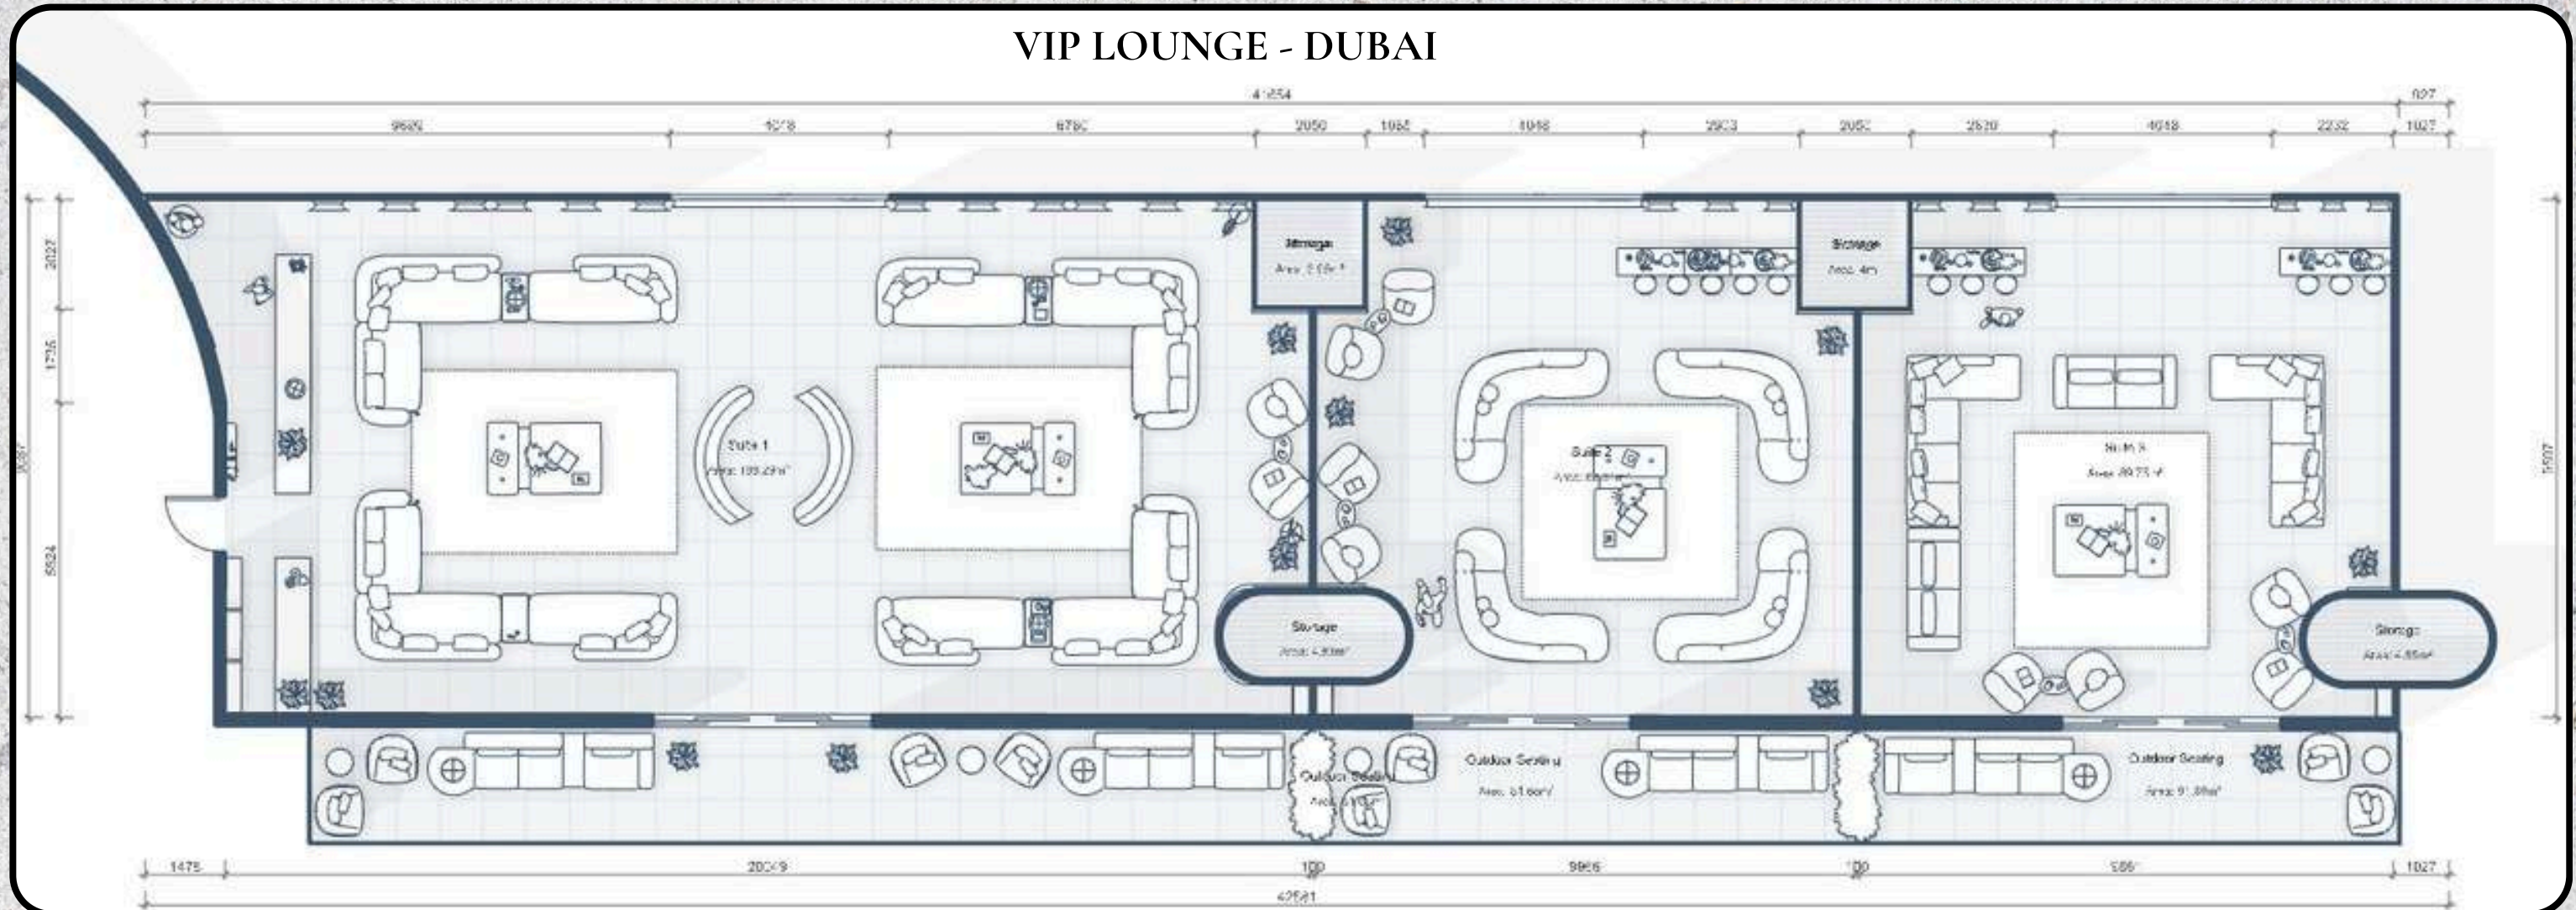

SERENE SUITES - LAHORE



Architecture rarely survives the transition from page to reality unchanged. Abstract lines inevitably collide with external capital friction, where risk-averse stakeholders often attempt to dilute core design intent.



In standard practice where the architect is not the owner, clients view necessary site adaptations through a lens of fear, often creating friction in the pipeline as conservative capital resists spatial ambition.





This built outcome proves that when you possess full autonomy to navigate the gap between drawing and reality, a design can survive the construction phase exactly as intended.

The strategy is twofold: anticipate structural and material realities ahead of time, and remain open to adaptation without sacrificing the underlying spatial logic or conceptual purity.



On "Anarchitect"




Before architecture was reduced to an instrument for real estate valuation and iconic skylines, the first structures were built simply for shade and shelter. The Term "Anarchitect" is a rejection of this industry devolution. Within this framework, I view computational workflows as instruments for optimizing performance, material integrity, and the human experience so that **fundamental needs, rather than excess, drive developments naturally.**

PROJECT-1

BARND0 - FLORIDA

When I began conceptualizing this single-family home near Lake Pasadena, my objective was clear: **maximize the spatial experience while minimizing the ecological footprint.**

This core rationale guided my decisions regarding construction materials and methods, with a strong emphasis on maximizing offsite fabrication and minimizing wet trades on-site. Logistically, modular steel frame manufacturers were readily available and equipped to collaborate, provided we supplied detailed plans, elevations, and sections to their specifications.

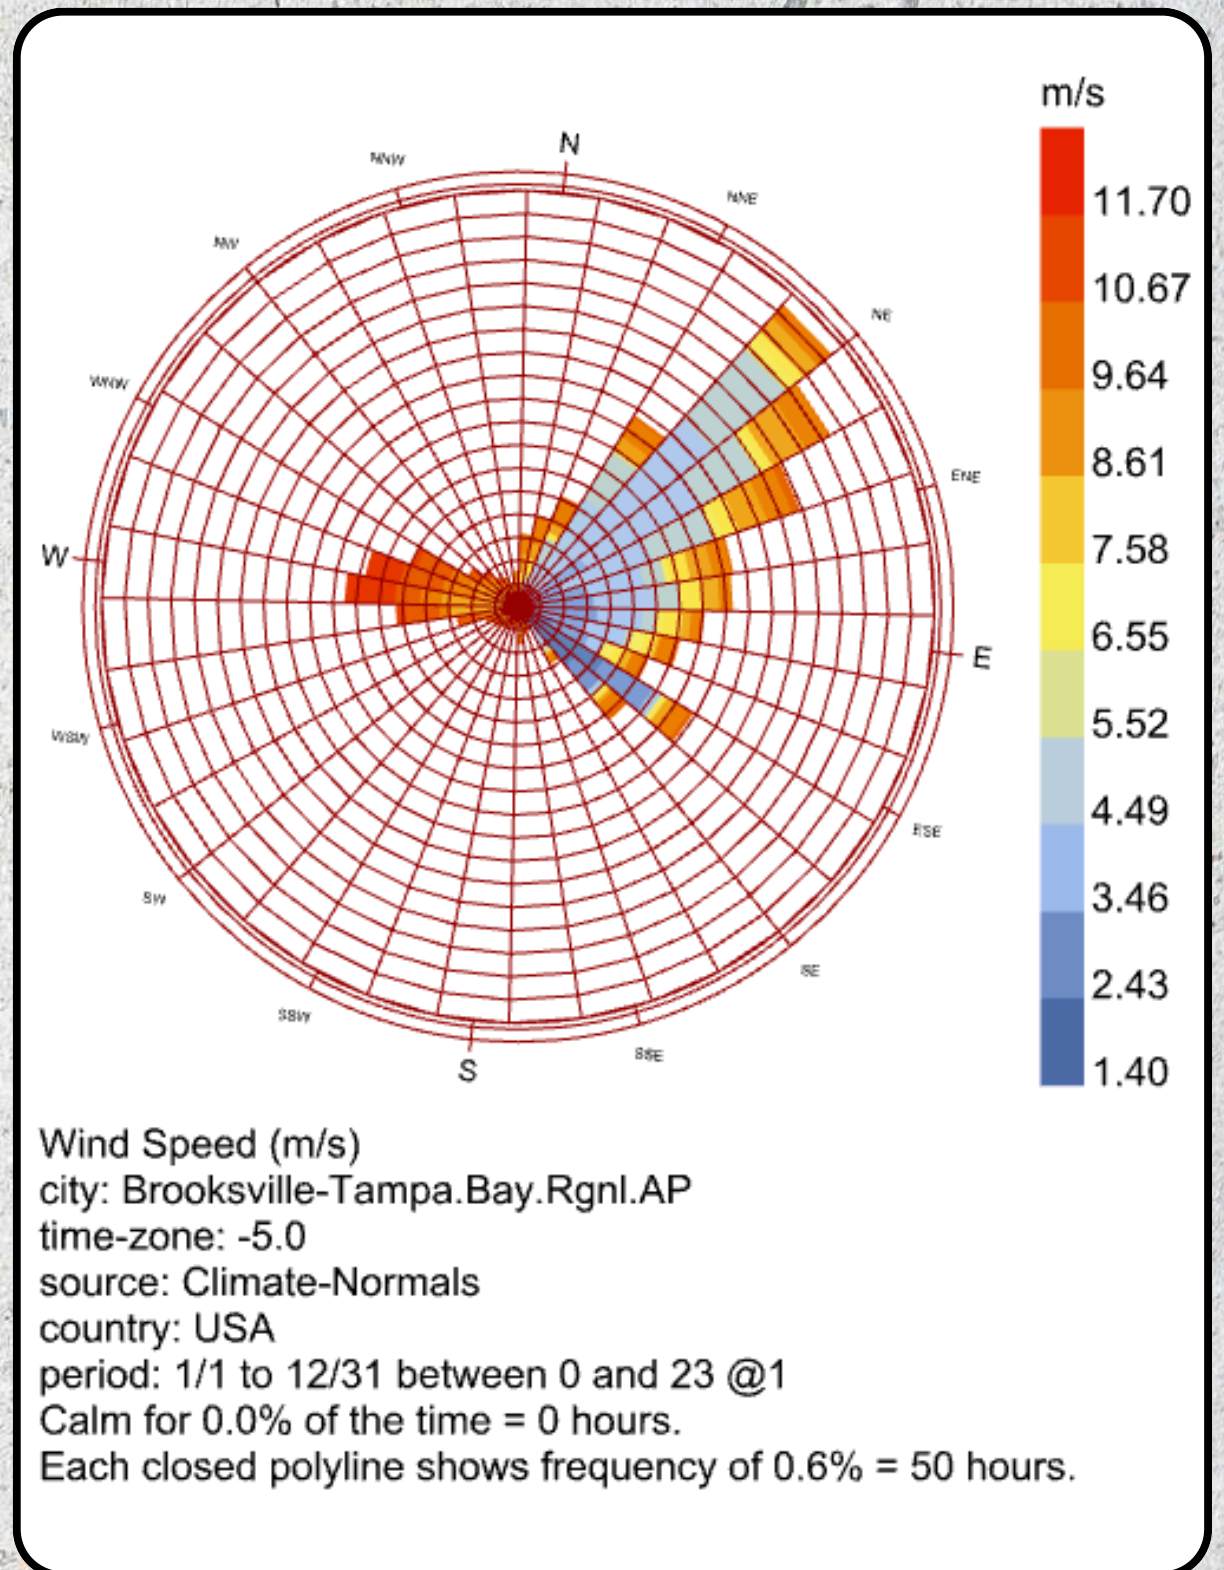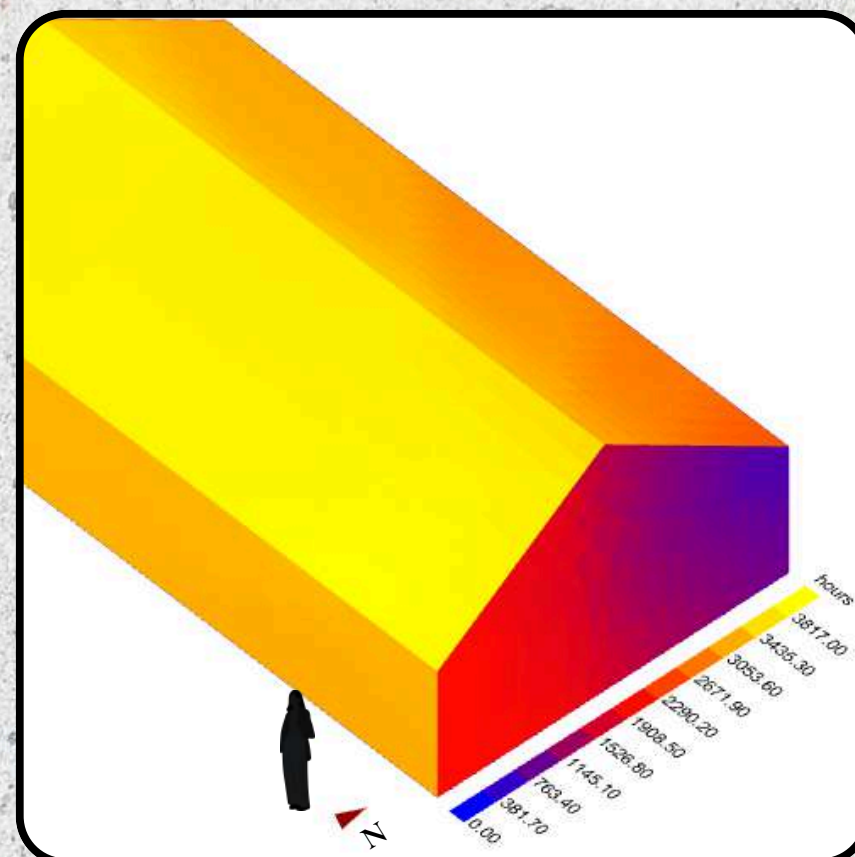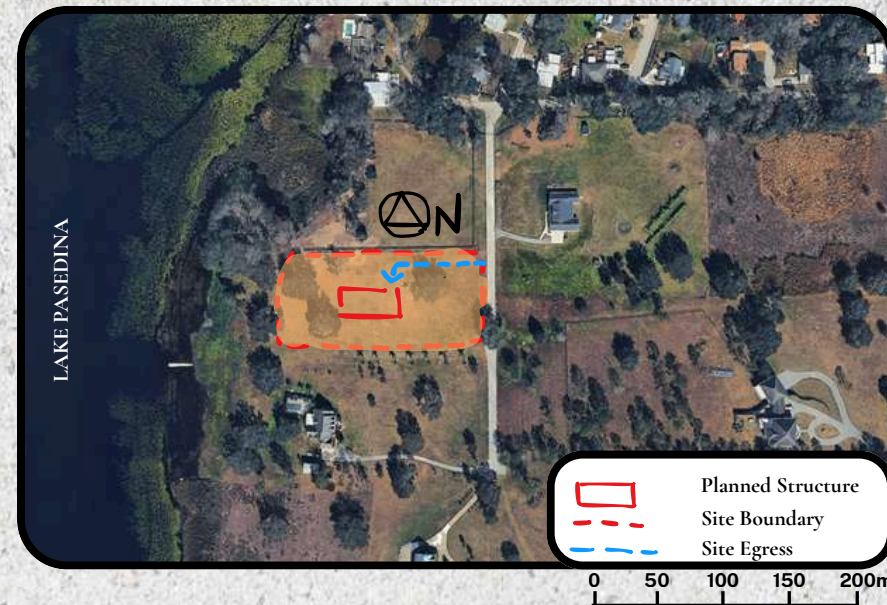





Environmental & Spatial Alignment


Microclimate solar radiation and wind rose analyses directly dictated the building's massing and axis. Rotating the primary volume optimizes the roof pitch for peak photovoltaic yield while channeling prevailing seasonal cross-breezes. Crucially, this orientation aligns the main living zone along the western axis to frame **unobstructed sunset views over Lake Pasadena** without introducing unwanted solar heat gain.

The structure was engineered with disassembly, material recyclability, and minimal permanent site scarring in mind. To achieve this I initially evaluated earth filled tires as a cost-effective alternative, but the proposal failed development approval due to concerns regarding rubber degradation. I later replaced this with strategically placed Insulated Concrete Forms for the footings.

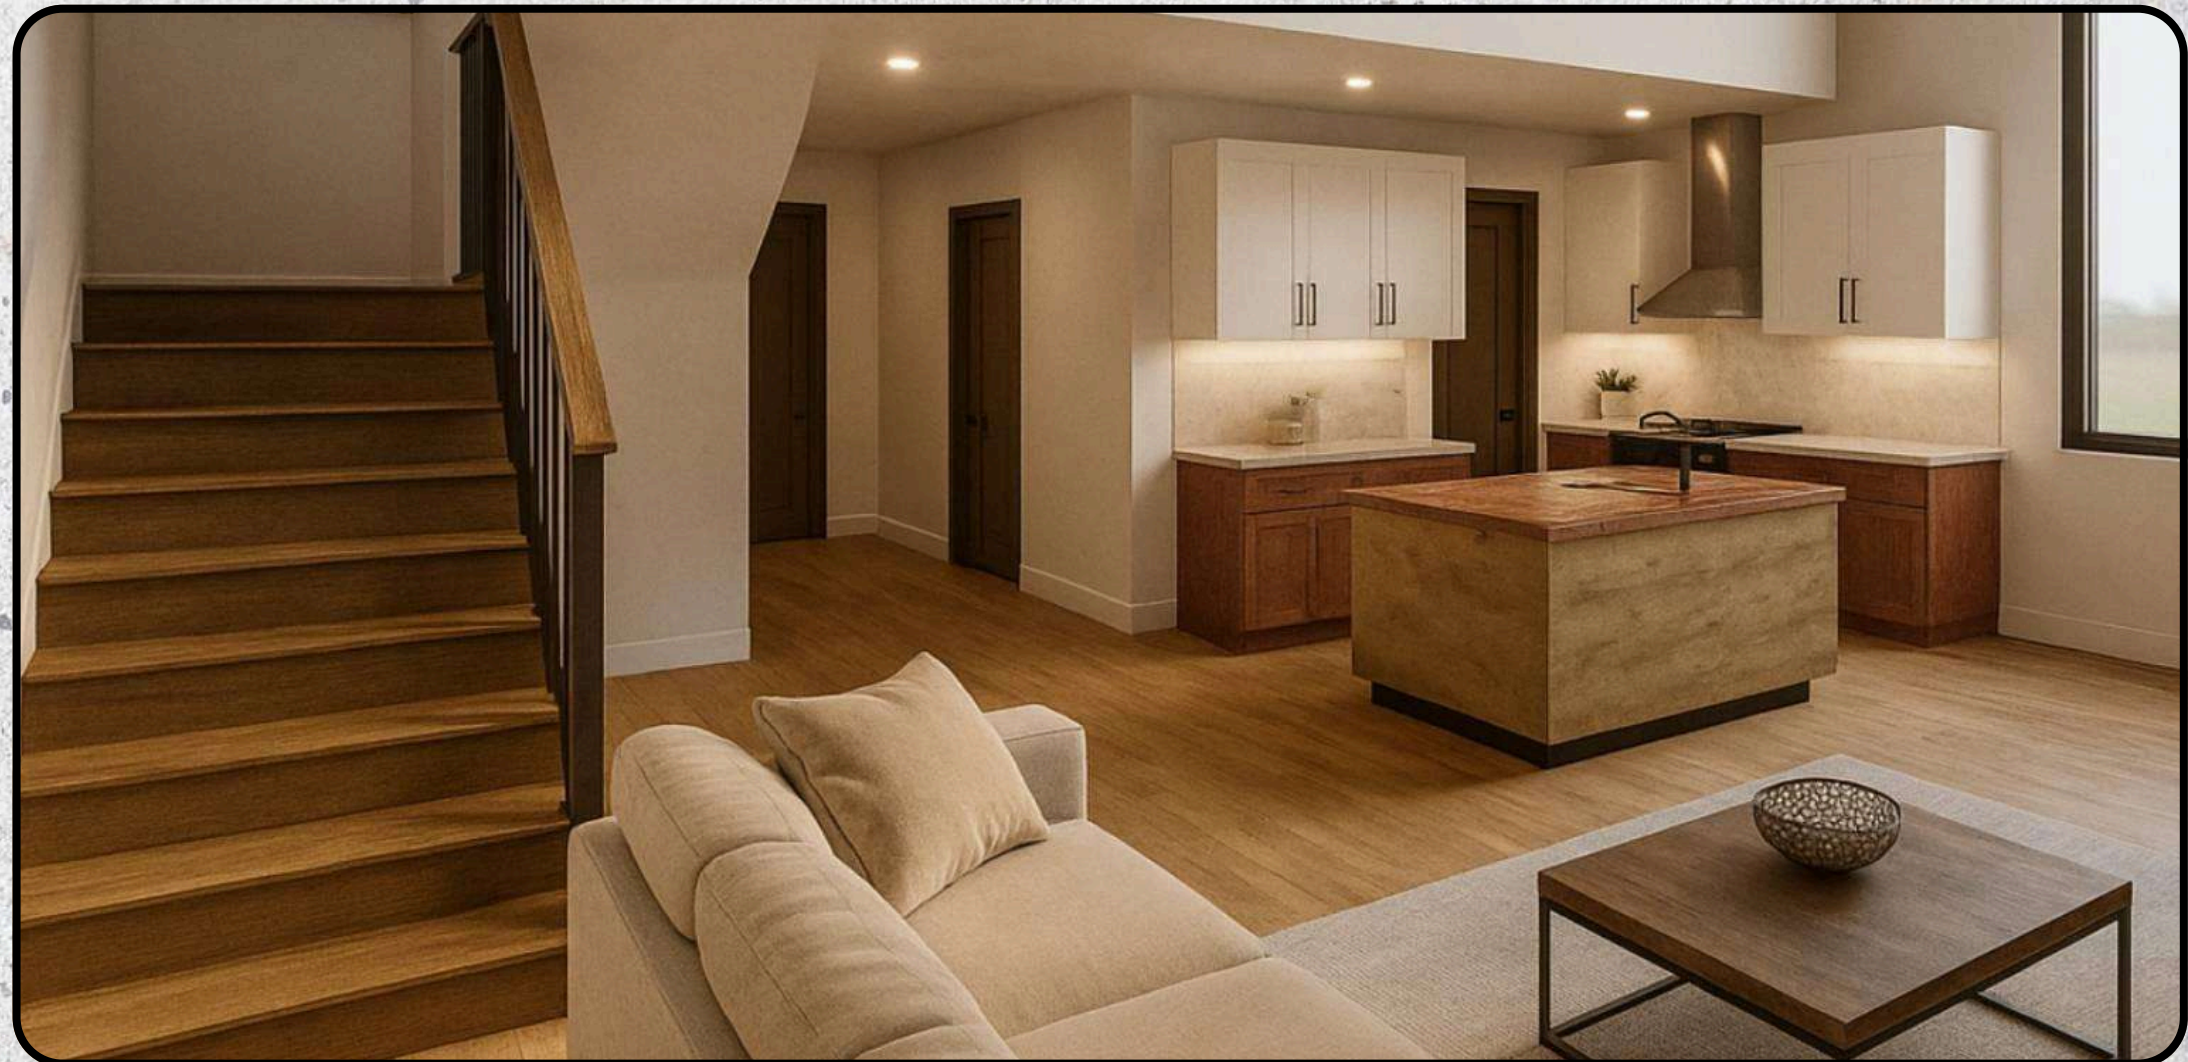


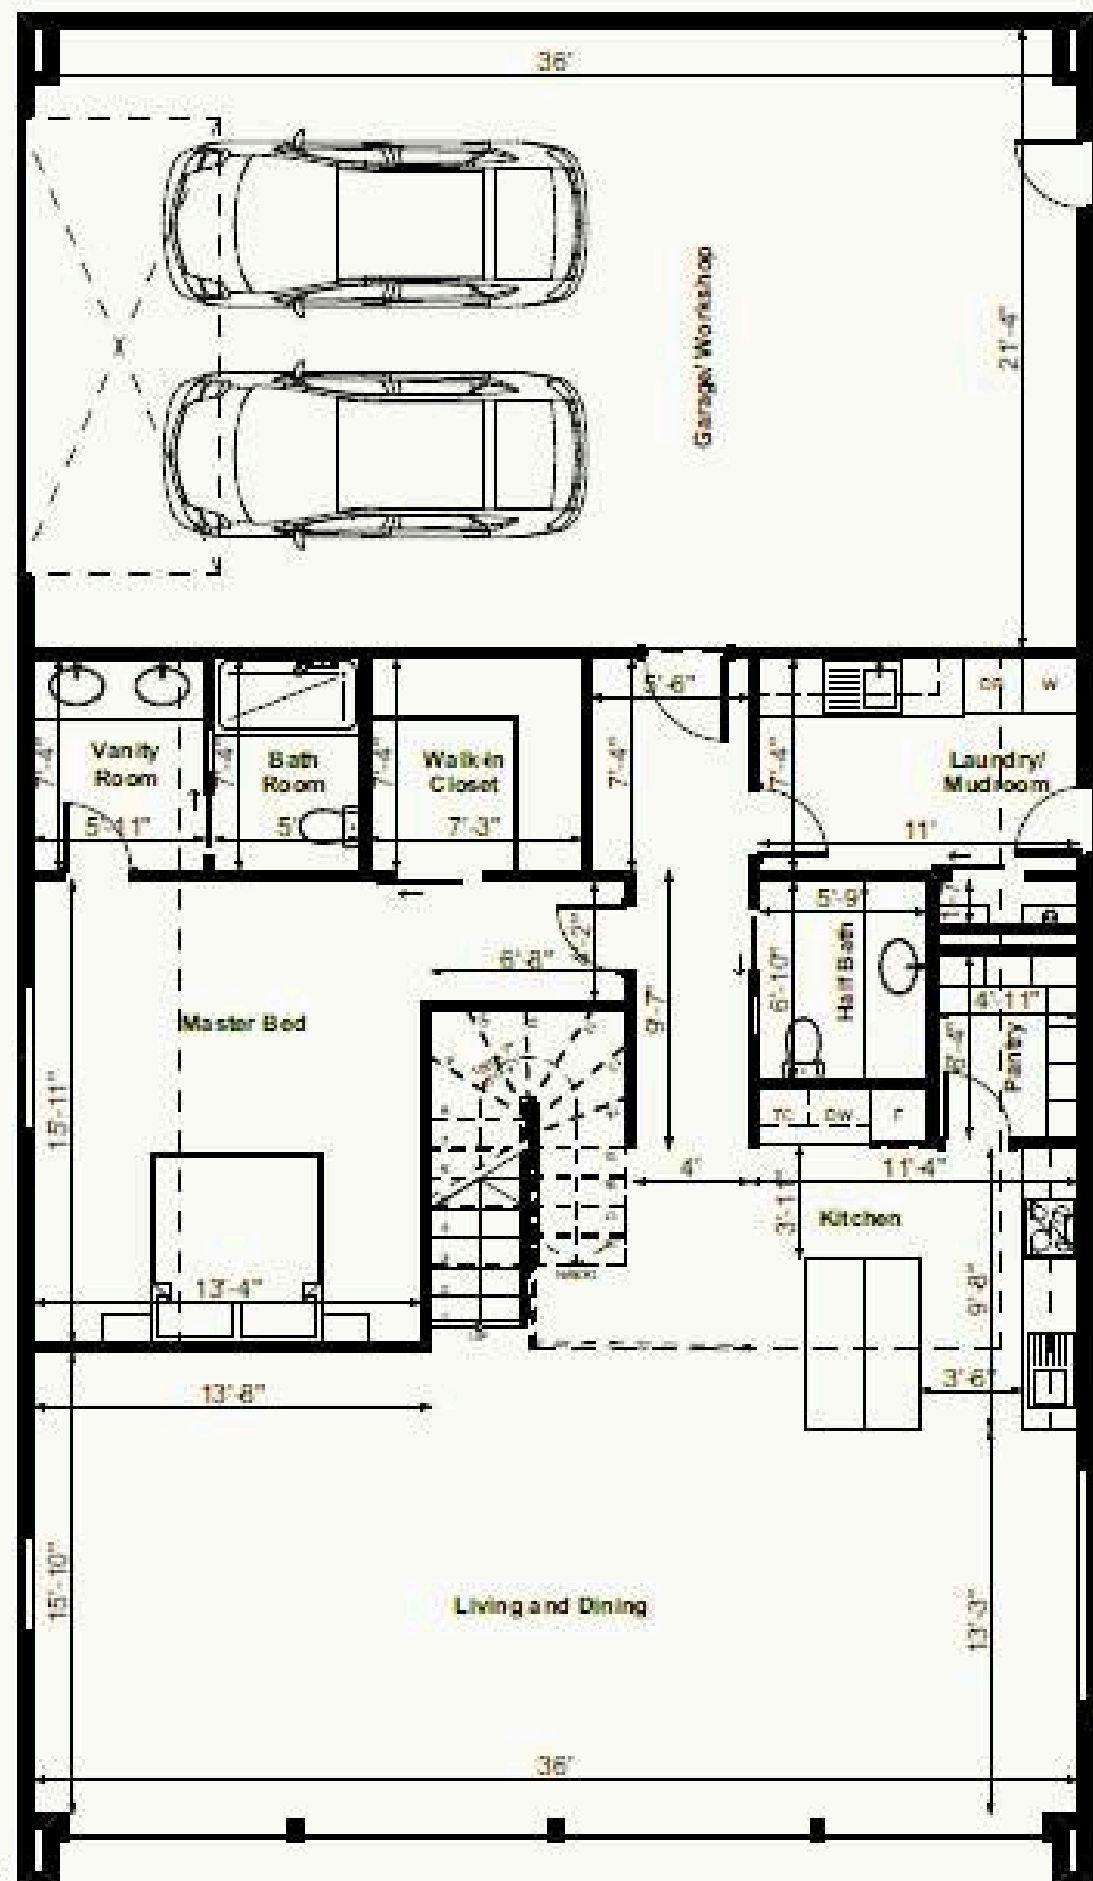

MAIN FLOOR

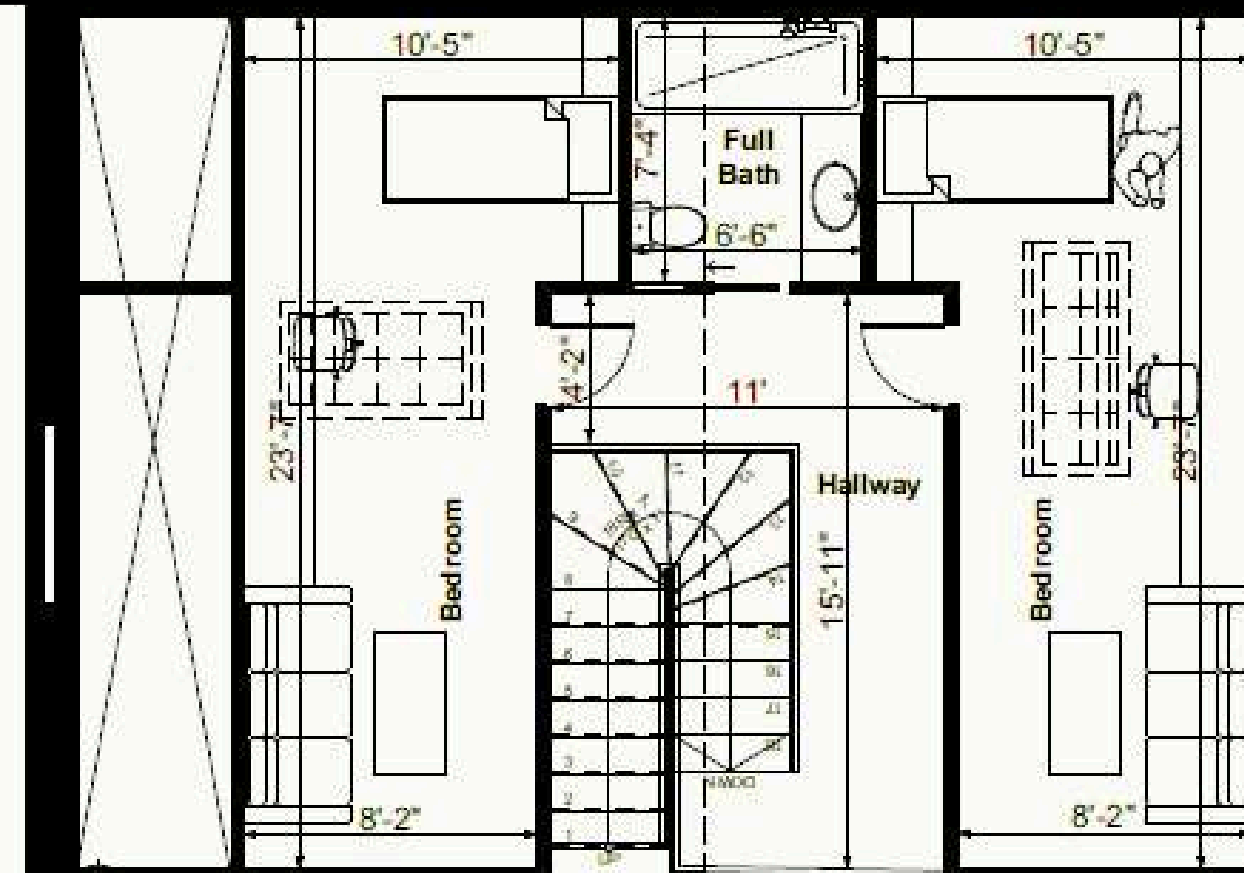

MEZZENINE FLOOR


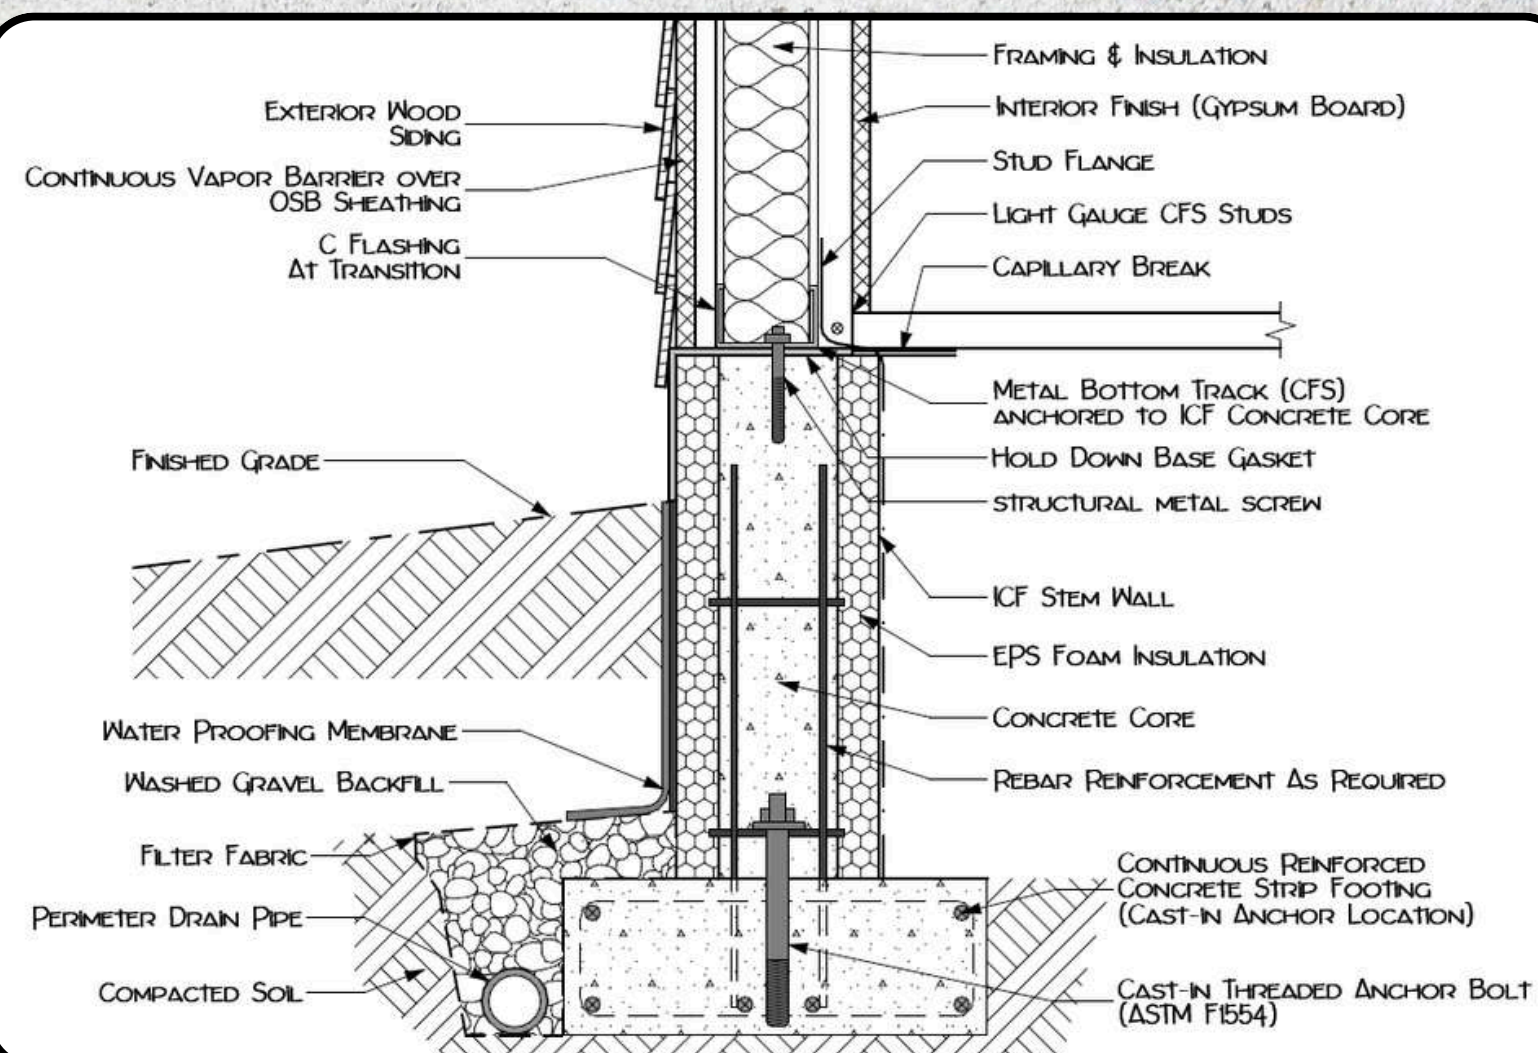


PROJECT-2

POLYBIOS - A LUNAR COLONY (NCA THESIS PROJECT)

Human survival is inseparable from Earth's planetary ecosystem. A lunar habitat cannot exist as an isolated, mechanical capsule; it must function as a self-sustaining biological and mechanical environment (Polybios). True long-term off-world habitability relies on replicating two non-negotiable terrestrial constants: 1.0g artificial gravity and atmospheric pressure.

Blue section

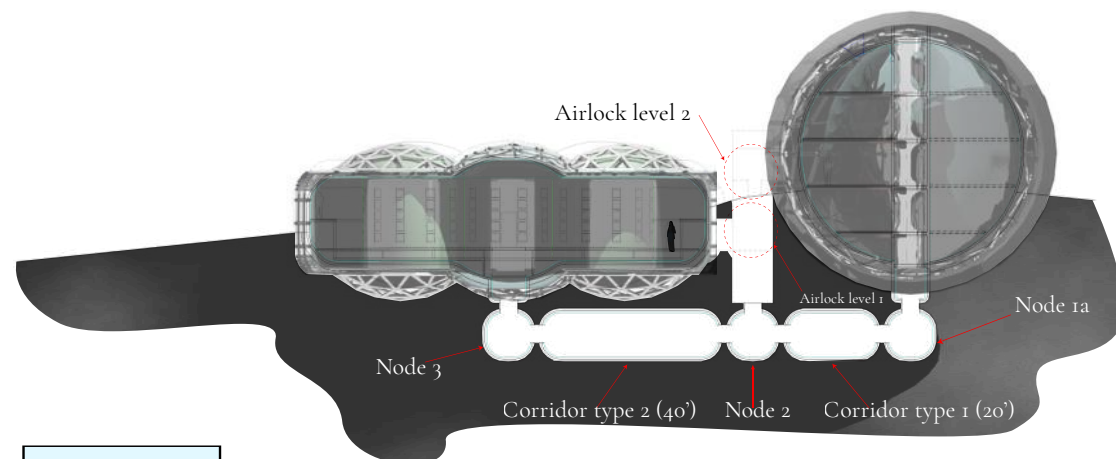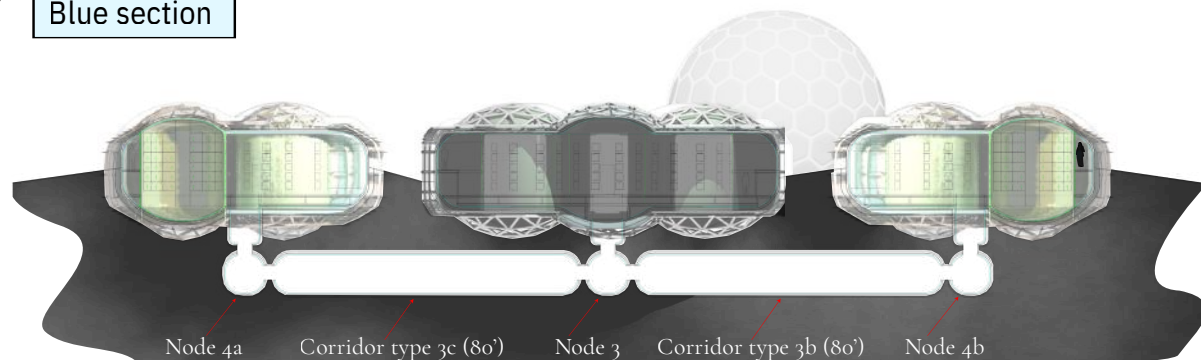


Red section

Phase II - HAB Master plan

There is a valuable resource on the moon that may allow mankind to harness the power of nuclear fusion. This would mean the end of the energy crisis as fusion produces power with an incredibly high energy density, able to produce enough energy to power an entire city for one day using only a gram of Helium-3 gas. An isotope of Helium with only one neutron as opposed to a regular one that has two.

A Regular Helium atom.

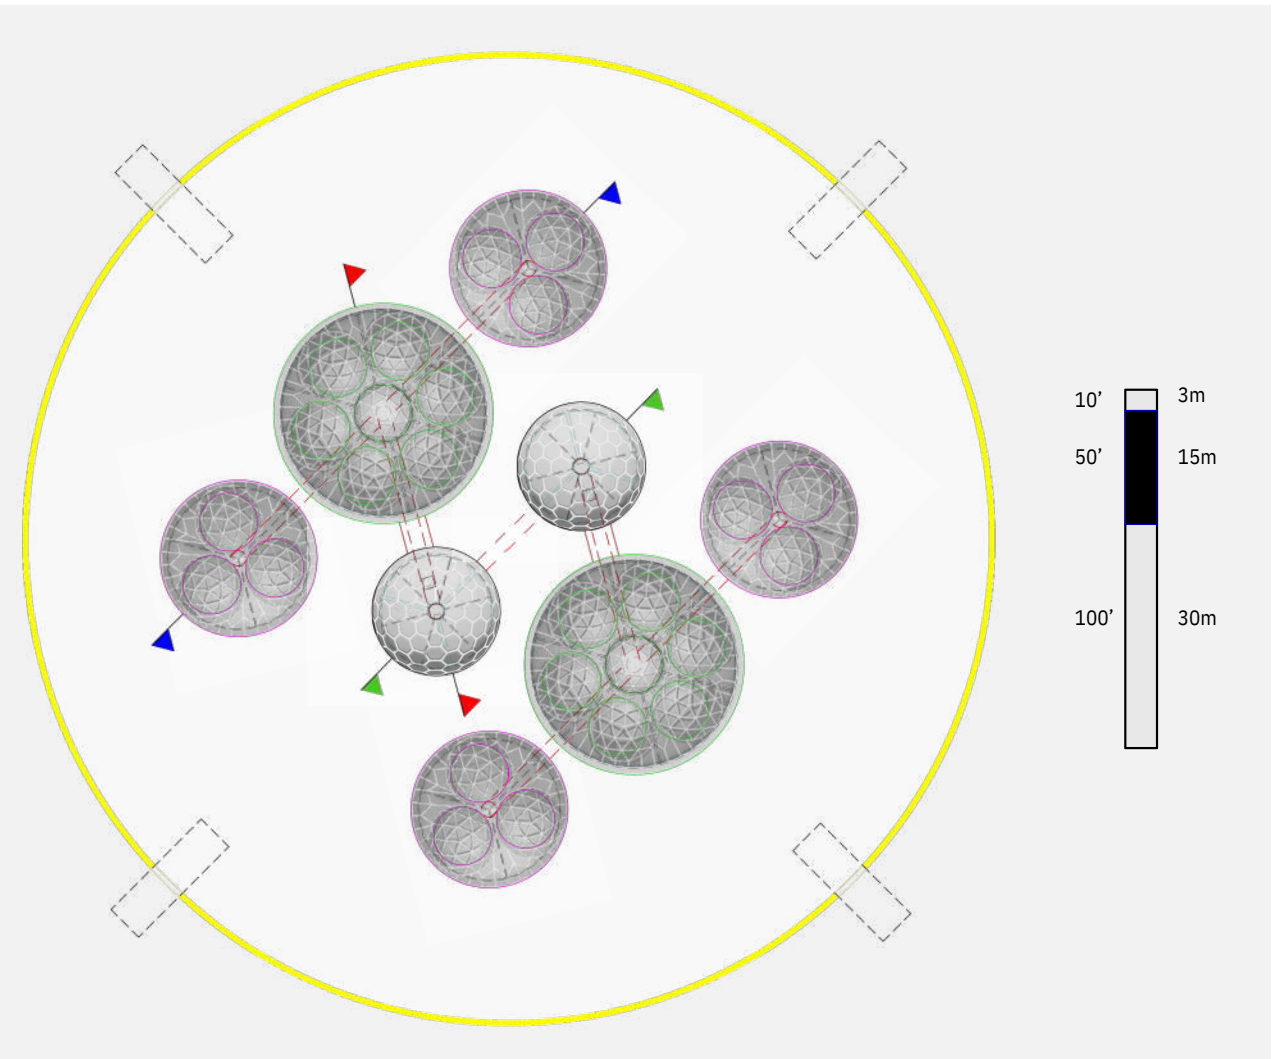


DEPLOYMENT & ASSEMBLY STRATEGY

To establish the initial Phase II outpost, unmanned transport craft deliver expandable pneumatic bladders into lunar orbit. Utilizing an Apollo-style modular docking protocol on a macro scale, these craft autonomously reconfigure in orbit into the target outpost layout prior to descent. Following automated soft-landing, the bladders inflate to establish core interior volumes. The structures are subsequently enveloped in an engineered Lunacrete mixture—utilizing in-situ lunar regolith—to construct a protective thermal and radiation barrier over the pressurized habitats.


- Small biomes (300 square meters)
- Large biomes (600 square meters)
- Habitat modules (200 square meters)
- Under-ground corridors
- Above-ground corridors
- Super dome (66 meter radius)




EXCAVATION

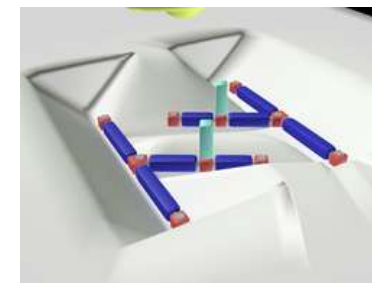

CORRIDORS

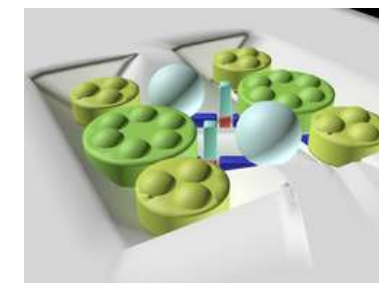


INFLATABLE MODULES

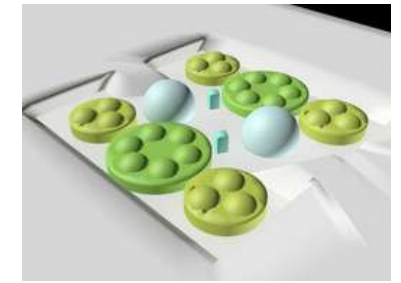


FINISHED GROUND LEVEL


Phase II
Habitat module

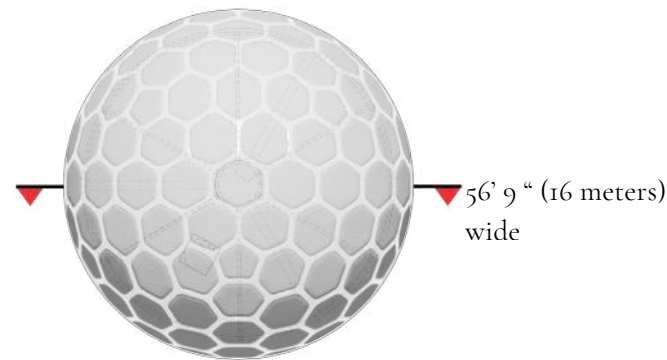

Phase II
CELSS module

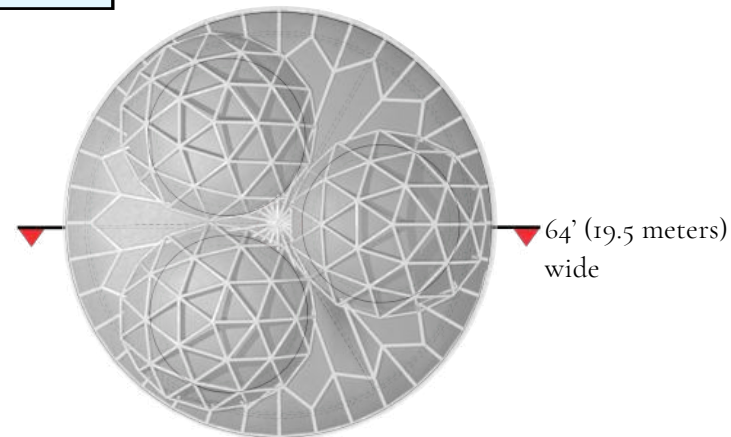


Phase II
Agriculture module

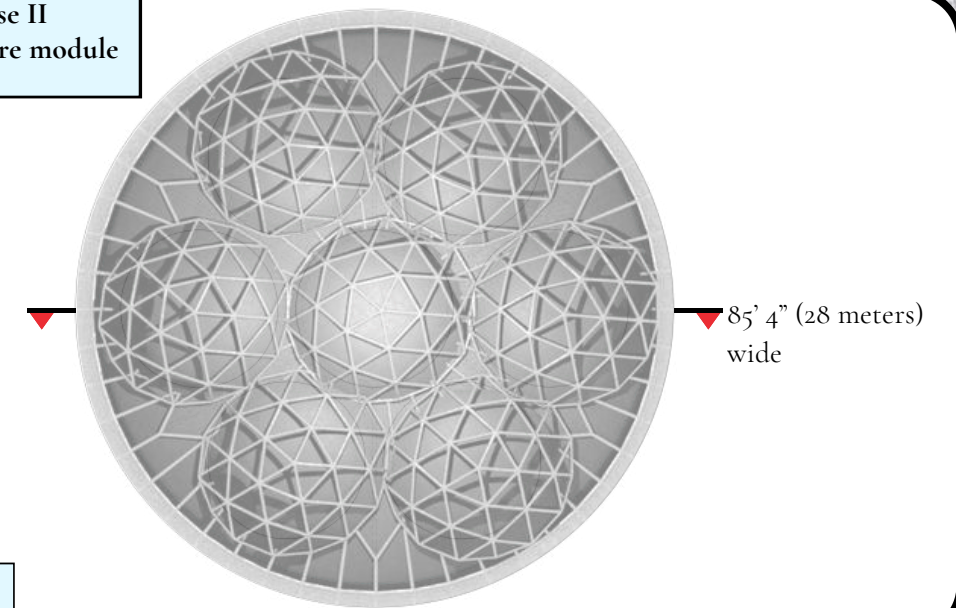


Top view

Top view

Top view

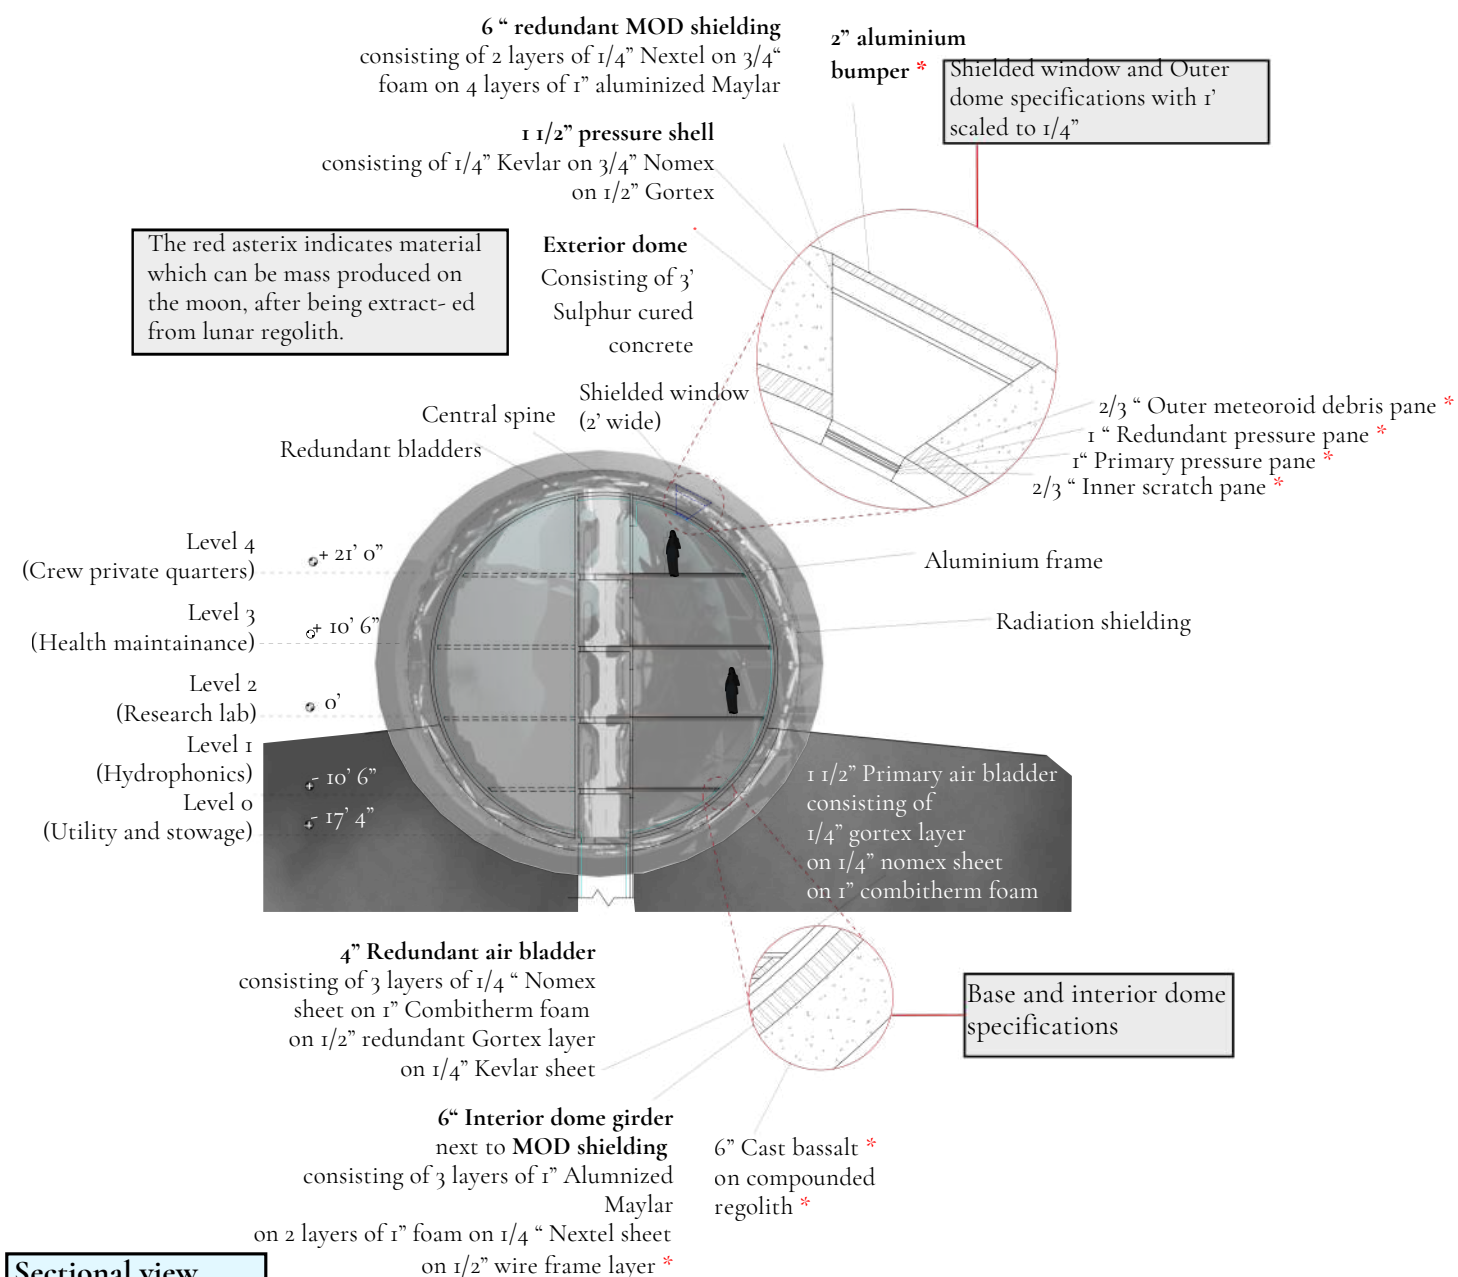



Sectional view
with r' scaled to
1/16"

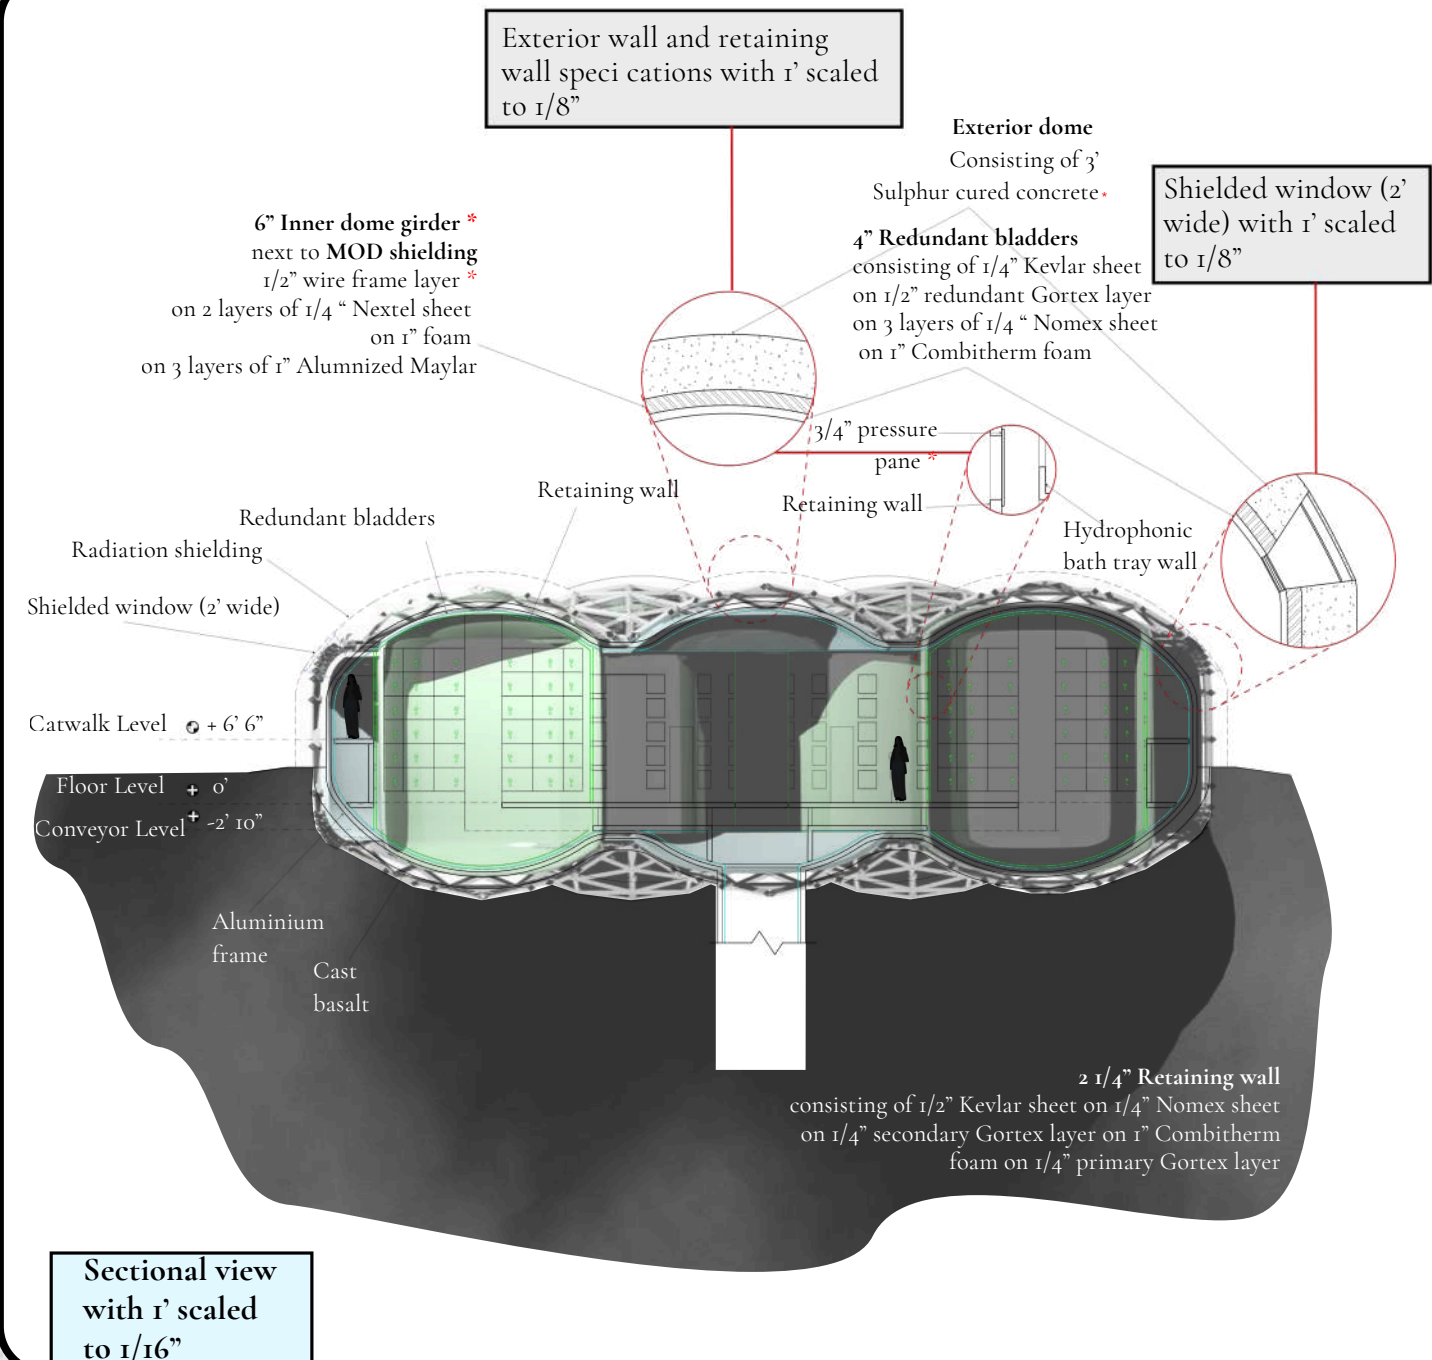

Sectional view
with r' scaled to
1/16"

The Primordial Roots of Architecture


Architecture did not begin as aesthetics or commerce; it emerged as a critical survival mechanism. The earliest humans diverged from pure instinct to construct artificial environments capable of shielding life against hostile, natural pressures. Expanding humanity to the Moon requires this exact foundational thinking: architecture as a primary life-support strategy. Off-world infrastructure fails if driven purely by industrial exploitation or capital generation. The ultimate goal of lunar architecture is human flourishing—improving life quality both on Earth and the Moon through equitable resource distribution and clean energy generation.

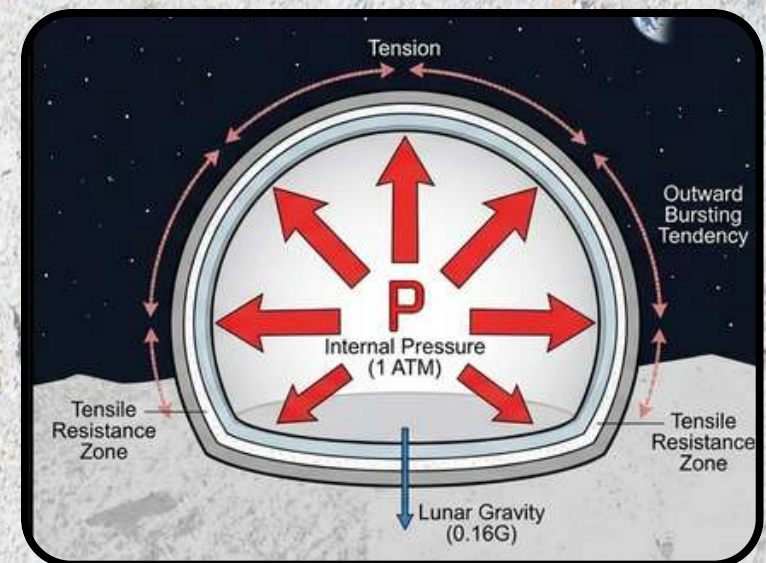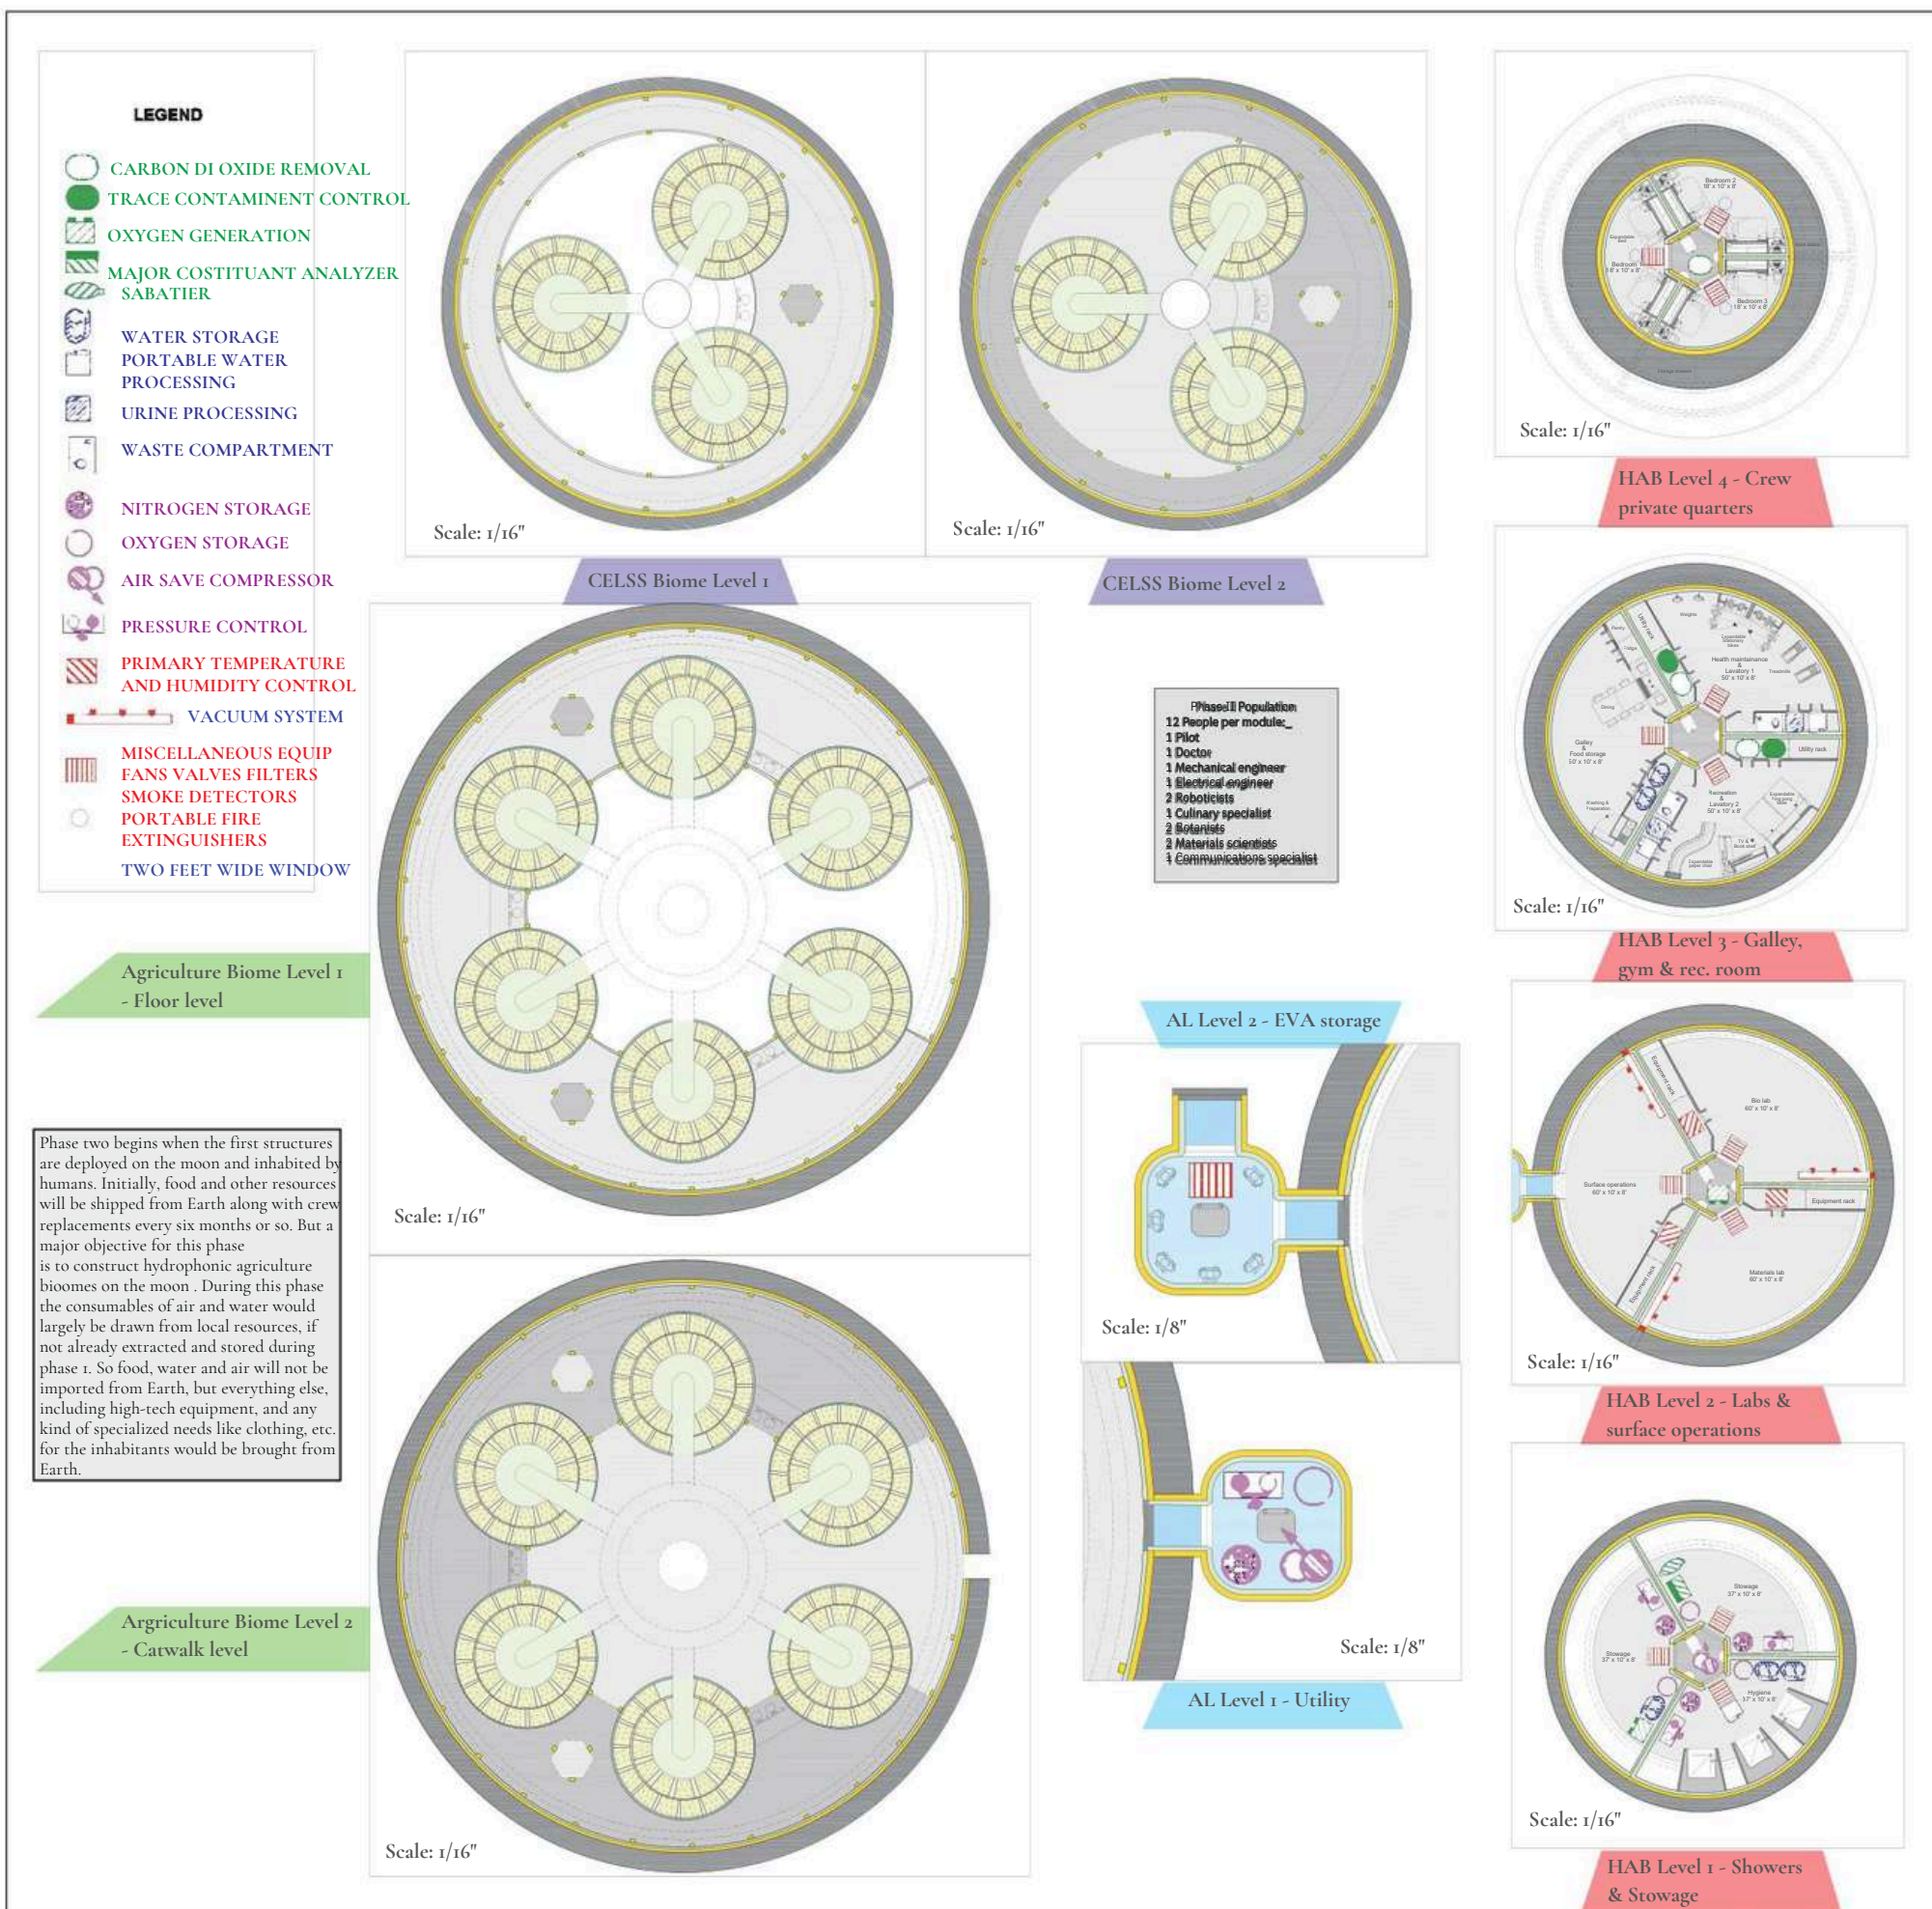

Terrestrial architecture is defined by gravity—loads flow downward. Lunar architecture, however, faces an inverse condition: internal atmospheric pressure generates outward forces that exceed the structure's lunar self-weight. The building no longer implodes; it explodes. Polybios responds to this paradigm shift through its geodesic geometry—resolving tensile hoop stresses uniformly—and its multi-layered pressure shell, designed specifically to contain internal pressure rather than resist gravitational crushing.


Phase III Polybios

Microgravity causes a number of impediments on the human body, most impactful of which include bone and muscle loss. This is because the body begins to adapt to a new weightless environment where that much mass, simply isn't needed to move around. As a result, Early Colonizers will need to exercise 2 hours a day to keep healthy. And it is why Earth gravity is absolutely essential for Phase III


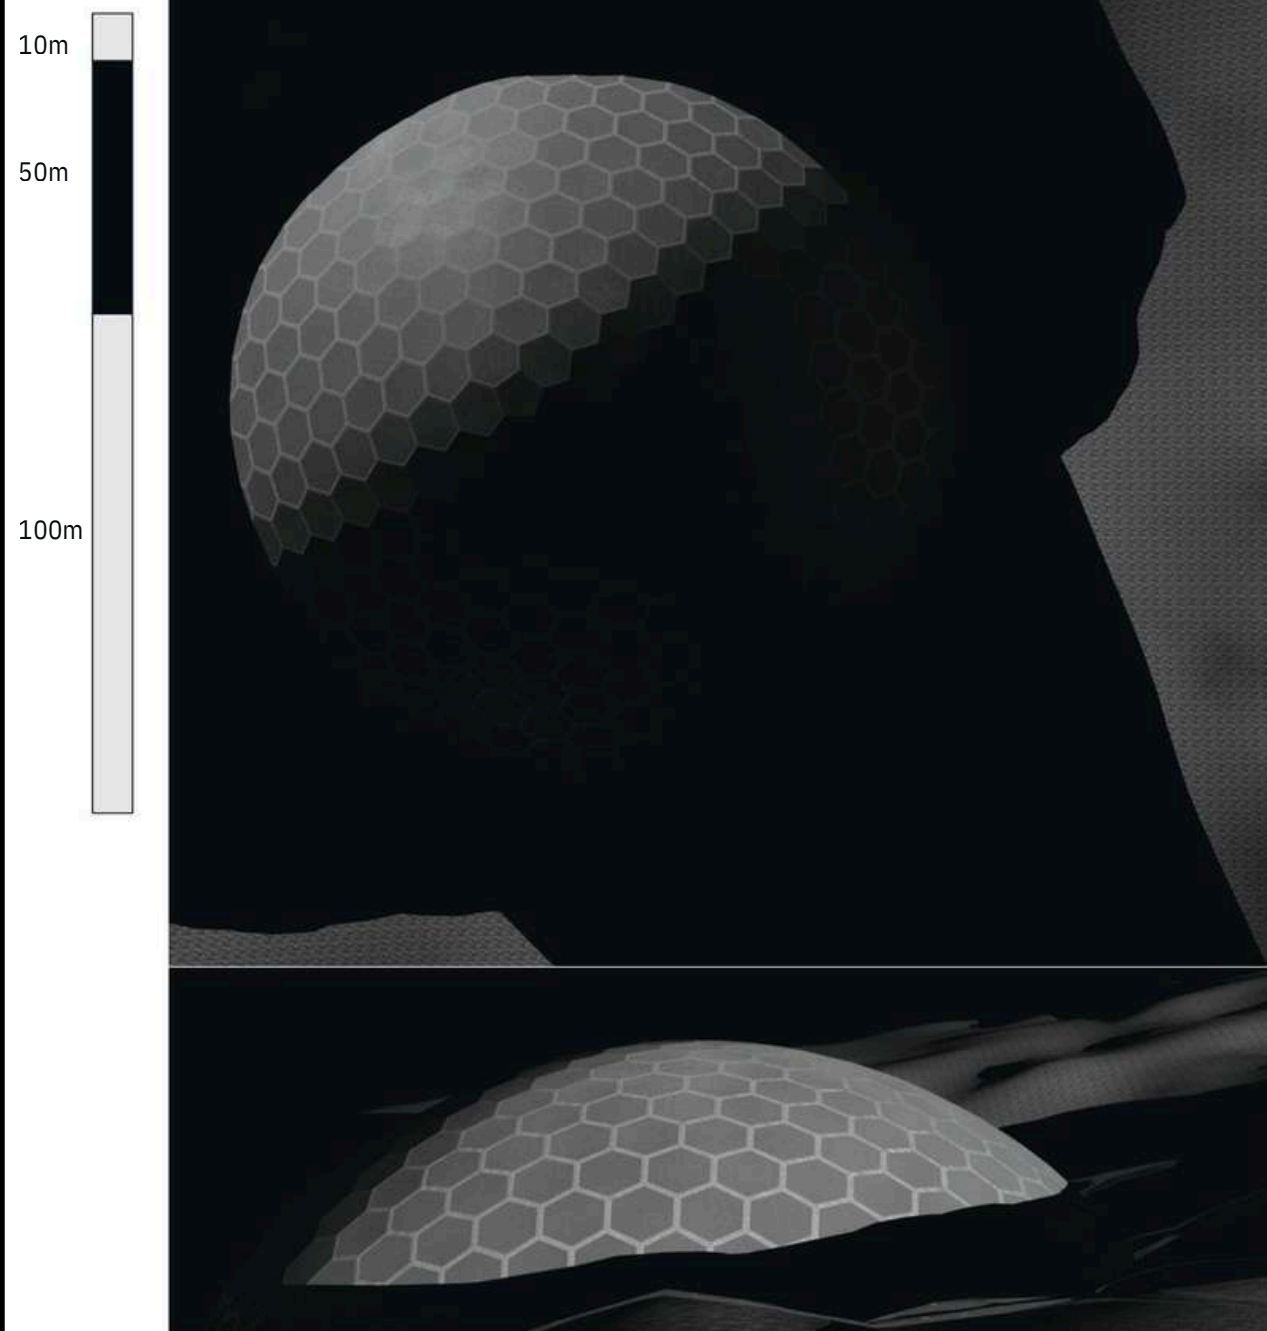


66m radius
Buckminster dome
(12 Iterations)


66m diameter
Buckminster dome
(6 Iterations)


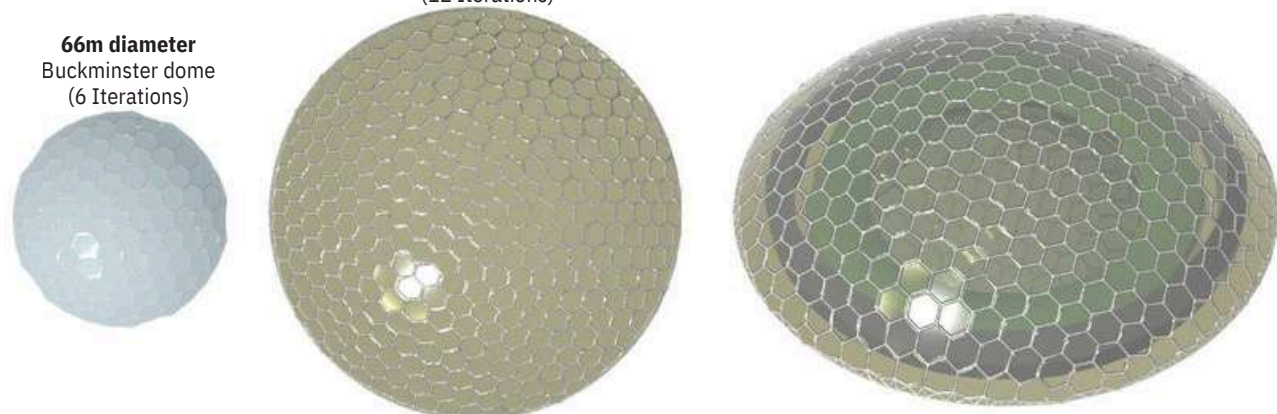


The Polybios masterplan is anchored within a secondary crater along the western rim of Shackleton Crater at the lunar South Pole. This specific topography offers a critical survival advantage: the extreme depth of polar craters creates Permanently Shadowed Regions (PSRs) that block the solar winds responsible for stripping Helium-3 from the lunar surface. As a result, the localized regolith contains pristine, untouched accumulations of both He-3 isotopes and water ice—supplying the essential in-situ resources required to sustain the colony's closed-loop ecosystem and fuel the Earth-bound fusion energy supply chain.

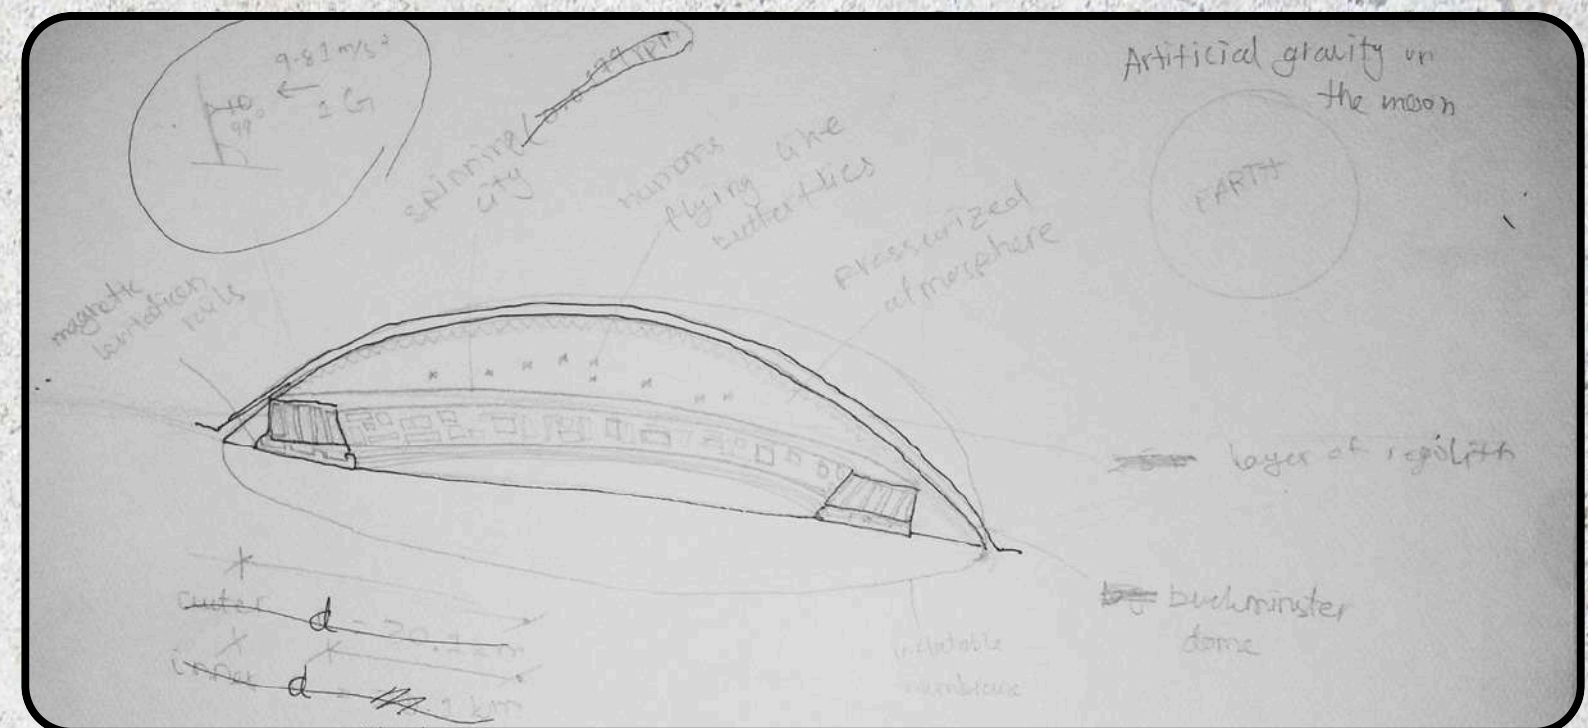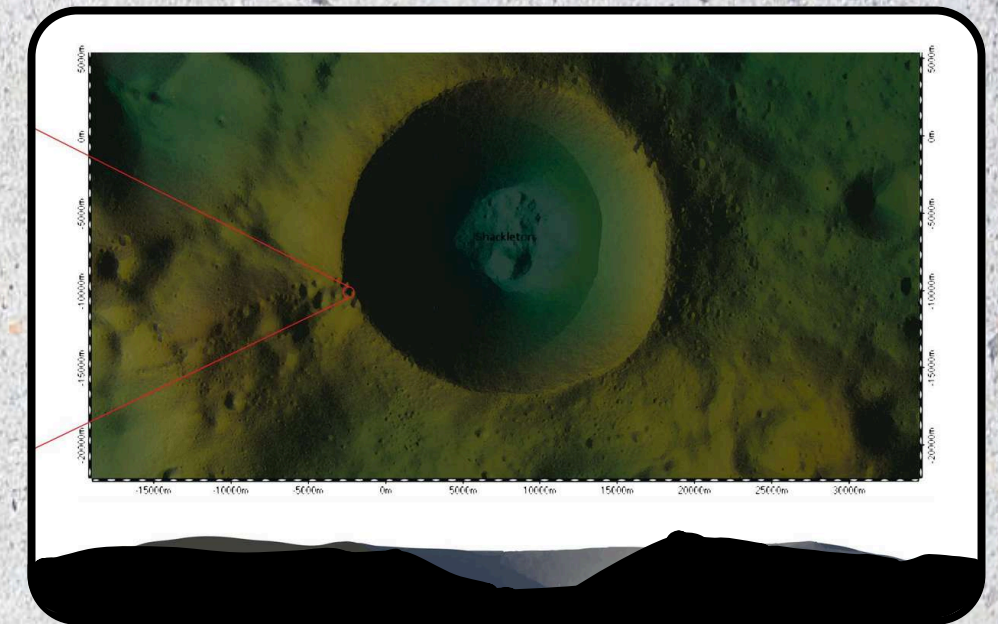

Human survival is inseparable from Earth's planetary ecosystem. A lunar habitat cannot exist as an isolated, mechanical capsule; it must function as a self-sustaining biological and mechanical environment (Polybios). True long-term off-world habitability relies on replicating two non-negotiable terrestrial constants: 1.0g artificial gravity and atmospheric pressure.

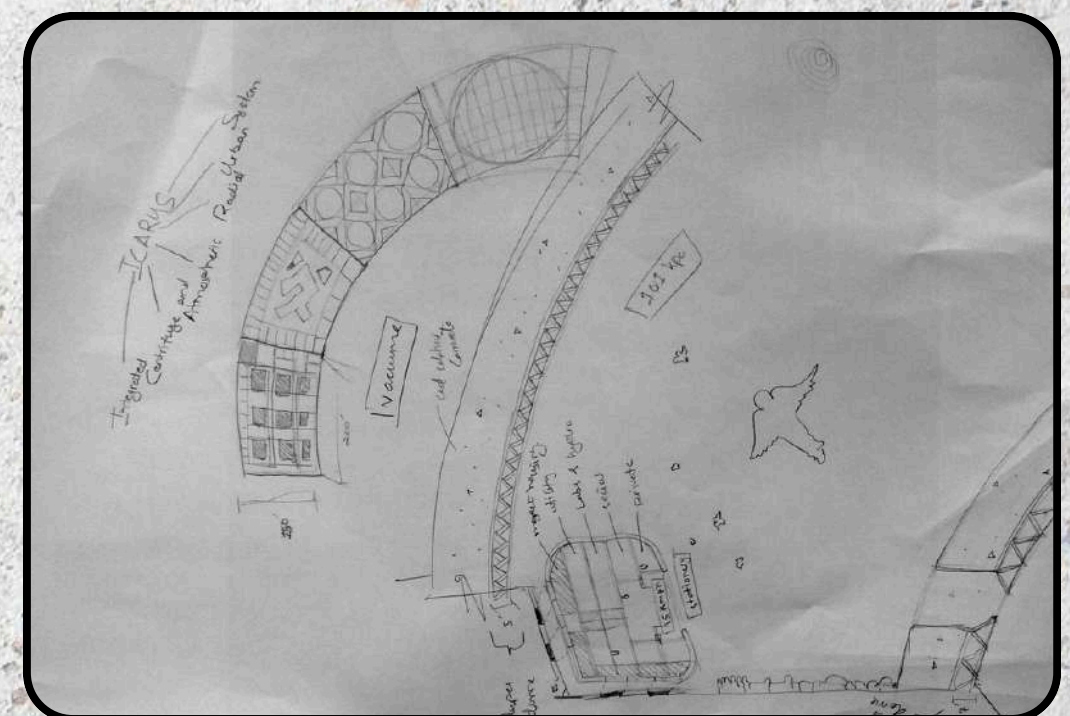

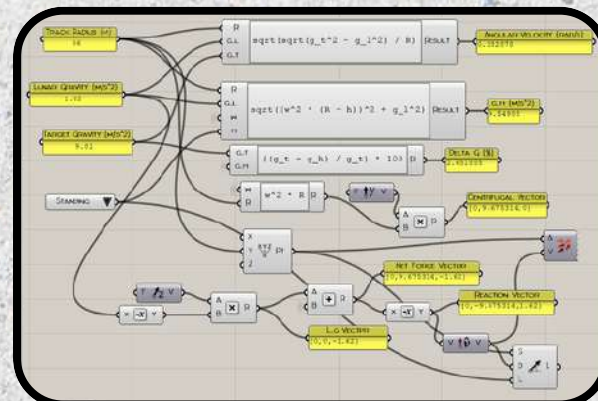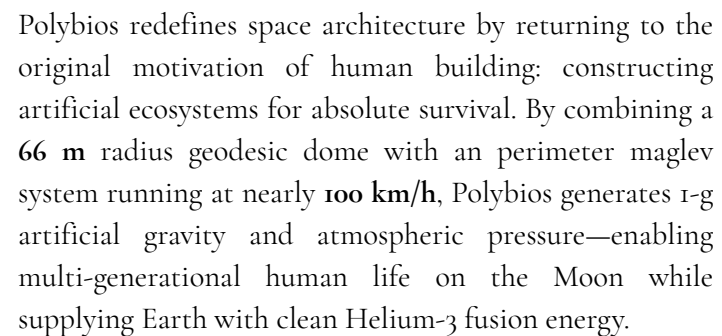

To enable safe human and cargo transfer between the static lunar surface and the 100 km/h perimeter maglev habitat, Polybios utilizes a synchronized rotary transfer system known as the Gravitational Elevator. Operating on an adjacent guide track, the sealed elevator disk match-accelerates to the exact velocity vector of the primary habitat ring. Once synchronized, the system executes a automated pressure-docking sequence, allowing seamless transit between the 0.16-g static lunar environment and the roof of the 1-g artificial gravity living modules without interrupting the continuous rotation of the main structure.