HOKUYO

PL d Category3 | SIL 2 Type3

Safety Laser Scanner
UAM-05LP-T301

The Smallest Size in the World with a Versatile Range for Safety Applications

Actual Size

Protection Range MAX **5m**	**Warning Range** MAX **20m**

"Small and light!"

Compact and User Friendly

The compact design for installation on AGVs, AGCs as well as in vertical guarding applications.

Size	Height $95.0 \times$ Width $80.0 \times$ Length 80.0 mm
Weight	0.5 kg

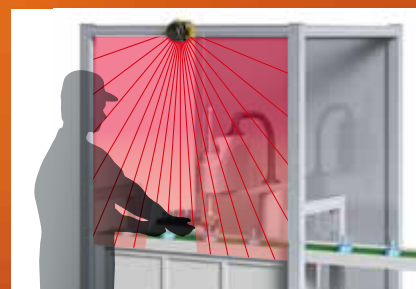| Conformity Standards		
IEC61496-1/3	Type3	
IEC61508	SIL 2	
ISO13849-1	PL d Category3	
UL508		
UL1998		
UL61496-1	Type3	
CSA C22.2	No. 14	

Collision Prevention

32 safety area patterns to accommodate the AGV travel path for collision prevention.

Presence Detection

Detects humans or objects entering the hazardous area.

Intrusion Detection

Detects access into critical zone. Reference boundary monitoring feature improves the safety by detecting the gaps around the protection zone and sensor's misalignment.

Expands The Range of Safety Applications

Protection over a Wide Range

Up to 5 meters of protection zone and 20 meters of warning zone configuration to suit various application requirement.

270°

Protection Zone MAX 5m

Warning Zone MAX 20m

Warning Zone 1

Warning Zone 2
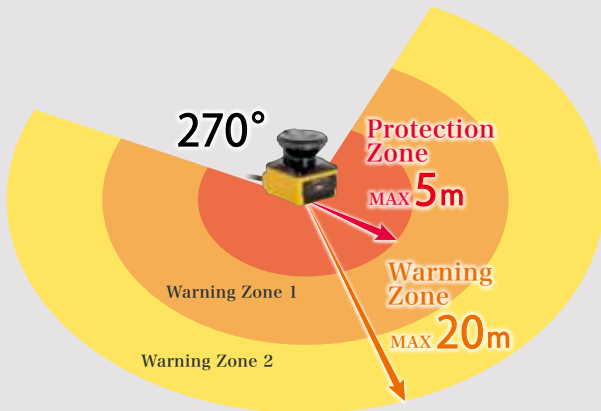
Data Output via Ethernet

Measurement data can be acquired via Ethernet with status of input/output signals and cyclic redundancy check code. Also supports command in SCIP2.0 protocol.

Ethernet (TCP/IP)

Distance data
Intensity data
Input and output status
CRC..
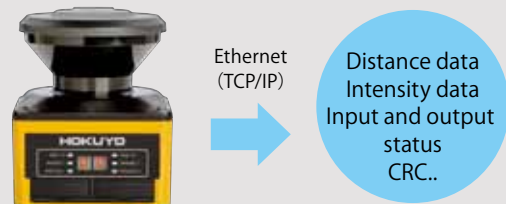
SD card for Configuration

Configuration data can be saved in a SD card which in turn can be used for configuring the UAM without connecting it to a PC. The feature is useful while replacing the UAM or configuring multiple units with the same settings.

Insert MicroSD card

Configuration can be also done via USB connection from a PC

Settings data

Master-Slave Function

Maximum 4 units of UAM can be interconnected for Master-Slave operation when muliple units are required to guard the hazardous area. The system can be controlled by connecting the input and output signals to Master unit only.
Important Note: It is not possible to control the actuators via master-slave bus communication.

Master

Slave

Warning Zone 2

Warning Zone 1

Protection Zone

AGV
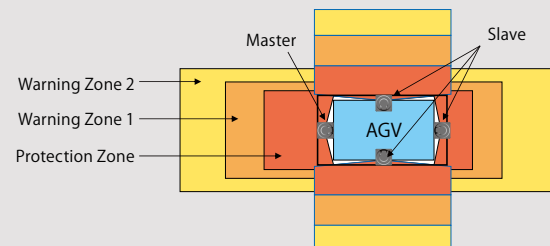
Encoder Input

In AGV applications, area is switched depending on the vehicle's speed. Speed and direction of travel provided via encoders are constantly monitored to switch the area and stop the AVG during abnormal travel.

Warning Zone 2

Warning Zone 1

Protection Zone

AGV

High speed   Medium speed   Low speed
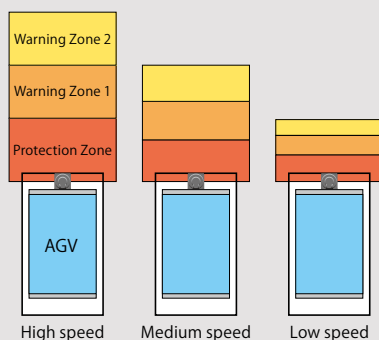
Dual Protection Mode

UAM can simultaneously protect two hazardous areas. Separate OSSD signals are triggered for the respective protection zones making it possible to guard two machines with a single UAM.
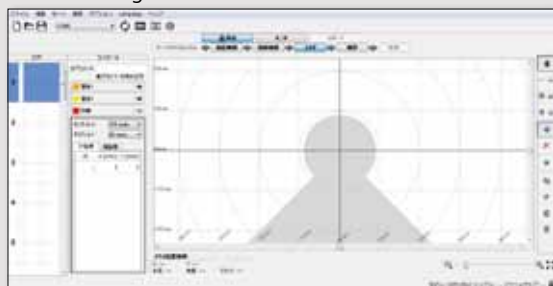

Protection Zone1

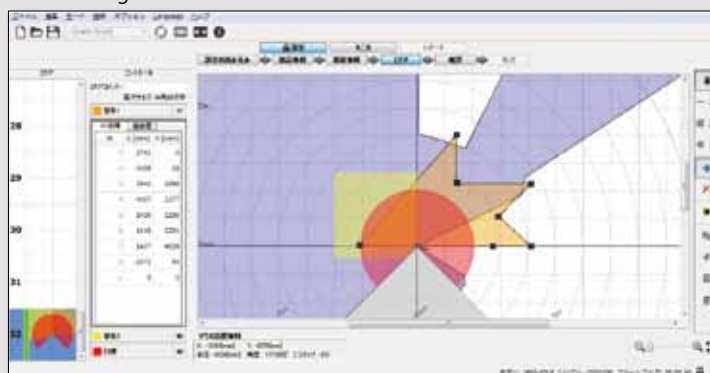Protection Zone2
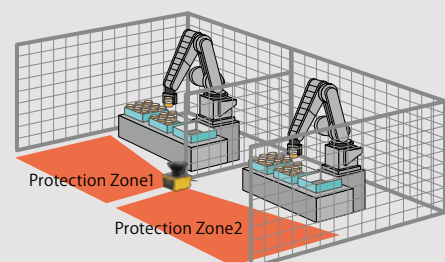
Easy Configuration of Complicated Zones

User Friendly Interface

Simple user interface to configure even a complicated zone by simultanously viewing the measurement data. Zones can be configured with 3 different methods.

Before settings

After settings

Category

Main unit

Appearance	Model number	Product code	Notes
	UAM-05LP-T301	UUAM005	CD-ROM consists of the configurator software and manual
	UAM-05LP-T301C	UUAM006	

Extension cable without connector (Option)

Appearance	Specification	Model number	Product code	Notes
	Cable length: 10m	UAM-5C10	UZ00066	Bare cable（T301 only）
	Cable length: 20m	UAM-5C20	UZ00067	

Extension cable with connector (Option)

Appearance	Specification	Model number	Product code	Notes
	Cable length:　2m	UAM-5C02C	UZ00081	Each UAM requires 1 cable （T301C only）
	Cable length:　5m	UAM-5C05C	UZ00082	
	Cable length: 10m	UAM-5C10C	UZ00083	
	Cable length: 20m	UAM-5C20C	UZ00084	

USB cable (Option)

Appearance	Specification	Model number	Product code	Notes
	Micro USB Length: 1m	UAM-MUSB	UZ00065	For UAM configuration

Ethernet cable (Option)

Appearance	Specification	Model number	Product code	Notes
	Length: 3m	UAM-ENET	UZ00062	Ethernet cable is necessary for distance data output

Brackets and optical window (Option)

Appearance	Specification	Model number	Product code	Notes
	Base mounting bracket	UAM-BK03	UZ00059	
	Rear mounting bracket	UAM-BK04	UZ00060	
	Cover bracket	UAM-BK05	UZ00061	To protect the optical window
	Optical window	UAM-W002	UZ00064	For replacement when damaged and only to be fitted by approved personnel.

UAM Project Designer (Option)

Appearance	Specification	Model number	Product code	Notes
	CD-ROM	UAM-CD03	UZ00063	UAM Project Designer for functions and zone configuration

Specification

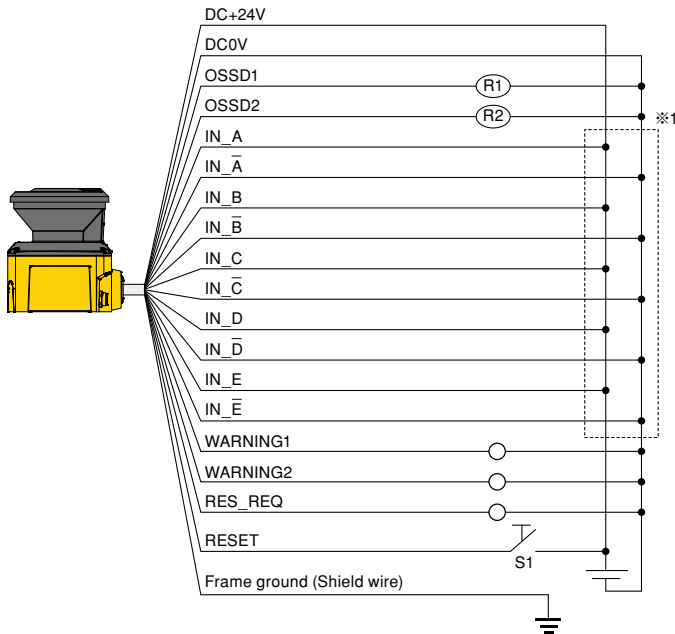| Subject		Specifications	
Model		UAM-05LP-T301	UAM-05LP-T301C
Detection property	Protection Range	Max : 5m	
	Warning Range	Max : 20m (Non-safety) *1	
	Distance Tolerance *2	+100mm	
	Detection Capability	From Black-Reflector Sheet (1.8%) to Retro-Reflector Sheet	
	Detection Range	270°	
	Minimum Detectable Width	ϕ30mm（Max : 1.8m） ϕ50mm（Max : 3.0m） ϕ70mm（Max : 5.0m）	
	Scan Frequency	30ms (Rotational Speed 2000rpm)	
	Area Pattern	Max 32 patterns for safety and 64 patterns for non-safety	
	Response Time	OFF 60ms～510ms ON 270ms～510ms	
Optics	Element	Pulsed Laser Diode	
	Wave Length	905nm	
	Safety Class	Laser Class 1	
Type		Type 3 (IEC 61496–1, IEC 61496–3)	
Functional Safety		SIL 2 (Type B, HFT=1) (IEC61508)	
PFH$_d$		$7.8×10^{-8}$ (T1=20 year) : When master slave function is not in use. $1.6×10^{-7}$ (T1=20 year) : When master slave function is in use.	
Housing	Size	80.0mm (W), 80.0mm (D), 95.0mm (H) (without cable)	
	Weight	0.5kg	
	Protection	IP65	
	Case Material	Body : Aluminum / Optical Window : Polycarbonate	
	Connection Cable	Flying lead cable length : 3m	Cable with water proof connector / cable length : 0.3m
Power Supply		DC 24V ±10% : when operation using converter power supply DC 24V −30%/+20% : when operation using battery	
Supply Current	Normal (without load)	6W	
	Max. (with load)	50W	
Output	OSSD1/2 (Safety)	Output type (High side SW) Output current (Max : 500mA) *3 Leak current (Max : 1mA) AWG 26 Load tolerance (L/R=25ms, C=1μF)	
	OSSD3/4 (Safety) WARNING 1/2 (Non-Safety)	Output type (High side SW) Output current : (Max : 250mA) *3 Leak current (Max : 1mA) AWG 28 Load tolerance (L/R=25ms, C=1μF)	
	RES_REQ 1 RES_REQ 2 MUT_OUT 1 MUT_OUT 2	Output type (PNP Transistor) Output current : (Max : 200mA) *3 Leak current (Max : 1mA) AWG 28	
Input	Area pattern 32 (5 Inputs x 2 Channels) EDM1/EDM2 MUTING1/MUTING2 MUTING3/MUTING4 OVERRIDE1/OVERRIDE2 RESET1/RESET2 ENC_A1/ENC_A2 ENC_B1/ENC_B2	Input Impedance 4.7 kΩ AWG 28	
Interface	Configuration	USB2.0 (USB micro type-B connector)	
	Data output	Ethernet 100BASE-TX (Water proof connector)	
Environmental Resistance	Temperature	−10°C to +50°C (No freezing)	
	Storage Temperature	−25°C to +70°C (No freezing)	
	Humidity	95% RH with no condensation	
	Storage Humidity	95% RH with no condensation	
	Surrounding Intensity *4	Less than 1500lx	
	Vibration	Frequency range : 10～55Hz Sweep rate : 1octave/min Amplitude : 0.35mm ±0.05mm	
Bump		Acceleration : 98m/s^2(10G) Pulse duration : 16ms	
Outdoor Operation		Not permitted	
Altitude		Below 2000m	

*1. Distance when reflectance of the object is 90% or above.
*2. Additional distance of 200 mm is needed when the UAM is working under high reflective background.
*3. Total current supply of OSSD output and Warning output should be below 1.0A.
*4. When the light sources are located at ≥5° from the detection plane of UAM.

Wiring example

Color	Signal	Function	Description	AWG
Brown	+24V DC	Power	Power Supply : DC 24V	22
Blue	0V DC	Power	Power Supply : DC 0V	22
Red	OSSD1	Output	Protection zone output 1	26
Yellow	OSSD2	Output	Protection zone output 2	26
Red/Black	OSSD3/WARNING1	Output	Protection zone output 3/Warning zone output 1	28
Yellow/Black	OSSD4/WARNING2	Output	Protection zone output 4/Warning zone output 2	28
Purple	IN_A	Input	Area Switching Input A	28
Gray	IN_B/MUTING3	Input	Area Switching Input B/Muting input 3	28
White	IN_C/OVERRIDE1/ENC1_A	Input	Area Switching Input C/Override input 1/Encoder input 1_A	28
Pink	IN_D/MUTING1/ENC1_B	Input	Area Switching Input D/Muting input 1/Encoder input 1_B	28
Green	IN_E/EDM1	Input	Area Switching Input E/External device monitoring 1	28
Purple/Black	IN_$\overline{A}$	Input	Area Switching Input A invert	28
Gray/Black	IN_$\overline{B}$/MUTING4	Input	Area Switching Input B invert/Muting input 4	28
White/Black	IN_$\overline{C}$/OVERRIDE2/ENC2_A	Input	Area Switching Input C invert/Override input 2/Encoder input 2_A	28
Pink/Black	IN_$\overline{D}$/MUTING2/ENC2_B	Input	Area Switching Input D invert/Muting input 2/Encoder input 2_B	28
Green/Black	IN_$\overline{E}$/EDM2	Input	Area Switching Input E invert/External device monitoring 2	28
Yellow/Green	RESET1	Input	Reset input 1	28
Yellow/Blue	RESET2	Input	Reset input 2	28
Orange	RES_REQ1/MUT_OUT1	Output	RES_REQ 1 : Request output 1/MUT_OUT 1 : Muting state output 1	28
Orange/Black	RES_REQ2/MUT_OUT2	Output	RES_REQ 2 : Request output 2/MUT_OUT 2 : Muting state output 2	28
White/Blue(TP)	RS485+	Communication	Communication Protocol RS485	28
White/Red(TP)	RS485−	Communication	Communication Protocol RS485	28
Shield wire	FG	—	Frame ground	—

R1 and R2 : External equipment (Safety relay, Electromagnetic contactor)
S1 : Interlock reset switch

*1: Refer to user's manual for details on area switching.
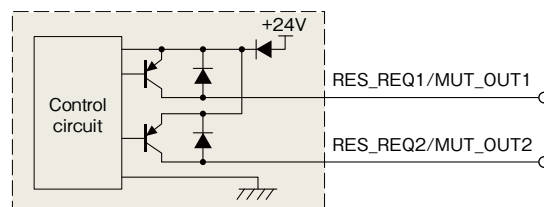
Input/Output circuit

OSSD output circuit
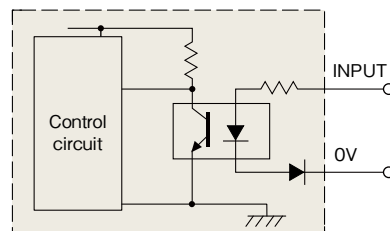
OSSD/Warning output is output type.
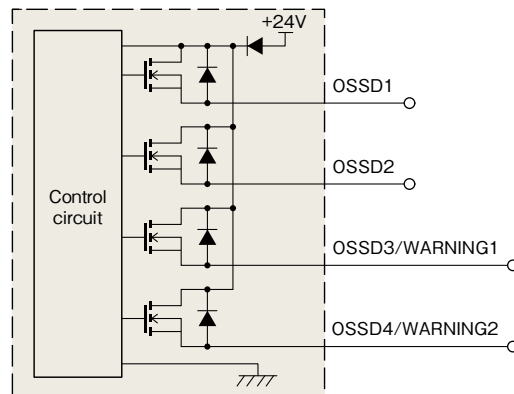
Other Output circuit

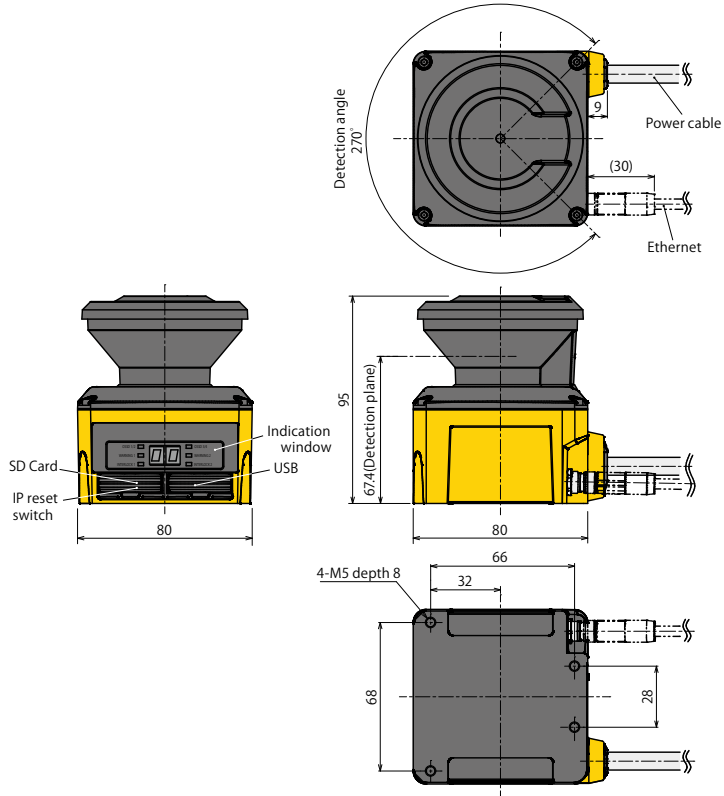RES_REQ1, RES_REQ2, MUT_OUT1, MUT_OUT2 output circuit.

Input circuit

Area input, EDM1, EDM2, RESET1, RESET2, MUTING1, MUTING2, MUTING3, MUTING4, OVERRIDE1, and OVERRIDE2
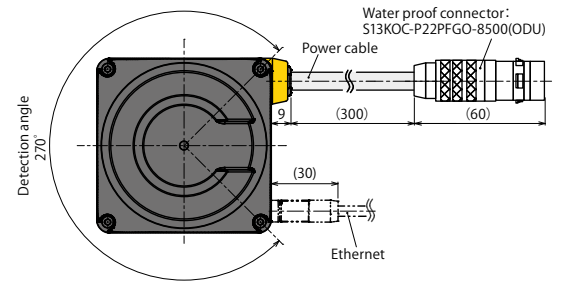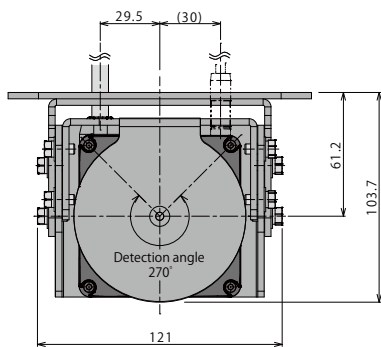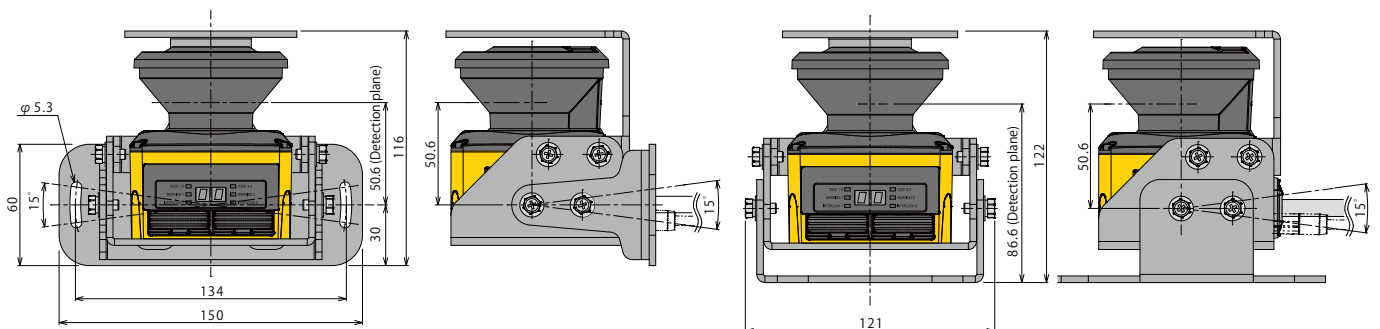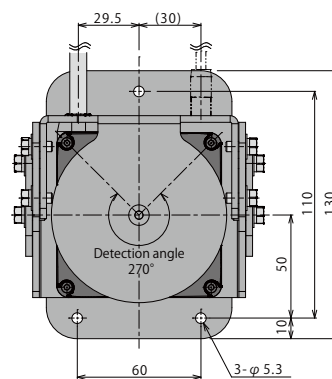
External Diagram

Sensor

UAM-05LP-T301

Detection angle 270°

9

Power cable

(30)

Ethernet

95

67.4(Detection plane)

80

80

SD Card

IP reset switch

Indication window

USB

66

4-M5 depth 8

32

68

28

UAM-05LP-T301C

Water proof connector：
S13KOC-P22PFGO-8500(ODU)

Power cable

9

(300)

(60)

Detection angle 270°

(30)

Ethernet

33

17

(10)

21

(30)

29.5

Fixing of Rear mounting bracket with Cover bracket

29.5

(30)

61.2

103.7

Detection angle 270°

121

φ5.3

60

15°

50.6(Detection plane)

116

30

50.6

15°

134

150

Fixing of Base mounting bracket with Cover bracket

29.5

(30)

110

130

50

10

Detection angle 270°

60

3-φ5.3

50.6(Detection plane)

122

86.6(Detection plane)

15°

121

HOKUYO

ISO14001 Certified
JQA-EM3873

ISO9001 Certified
JQA-1742

Caution for safety use

● Read instruction manual carefully before use.
● Products published in this brochure are intended to be used under specific conditions.
● For product related questions or technical issues, please contact our offices.

HOKUYO AUTOMATIC CO.,LTD.

Osaka HU Building, 2-2-5 Tokiwamachi, Chuo-Ku,
Osaka, Japan. 540-0028
TEL: +81-6-6947-6333   FAX: +81-6-6947-6350
URL http://www.hokuyo-aut.jp
E-mail: info@hokuyo-aut.jp