


FINISHED HONED AND CHROMED PRINT



RECIEVING STANDARD


- 64-128RMS ACCEPTABLE UNLESS SPECIFIED
- ID SURFACE PRIOR TO CHROMING 32RA(GROUND)
- HARD CHROME PLATING THICKNESS: .0006-.010"
- FLASH CHROMING ONLY
- THICKNESS(T) BASED ON 75,000 PSI MINIMUM MATERIAL YIELD STRENGTH - THICKNESS CAN BE
- MATERIALS
- MATERIAL CANNOT BE LOWER THAN 75,000 PSI MINIMUM YIELD STRENGTH

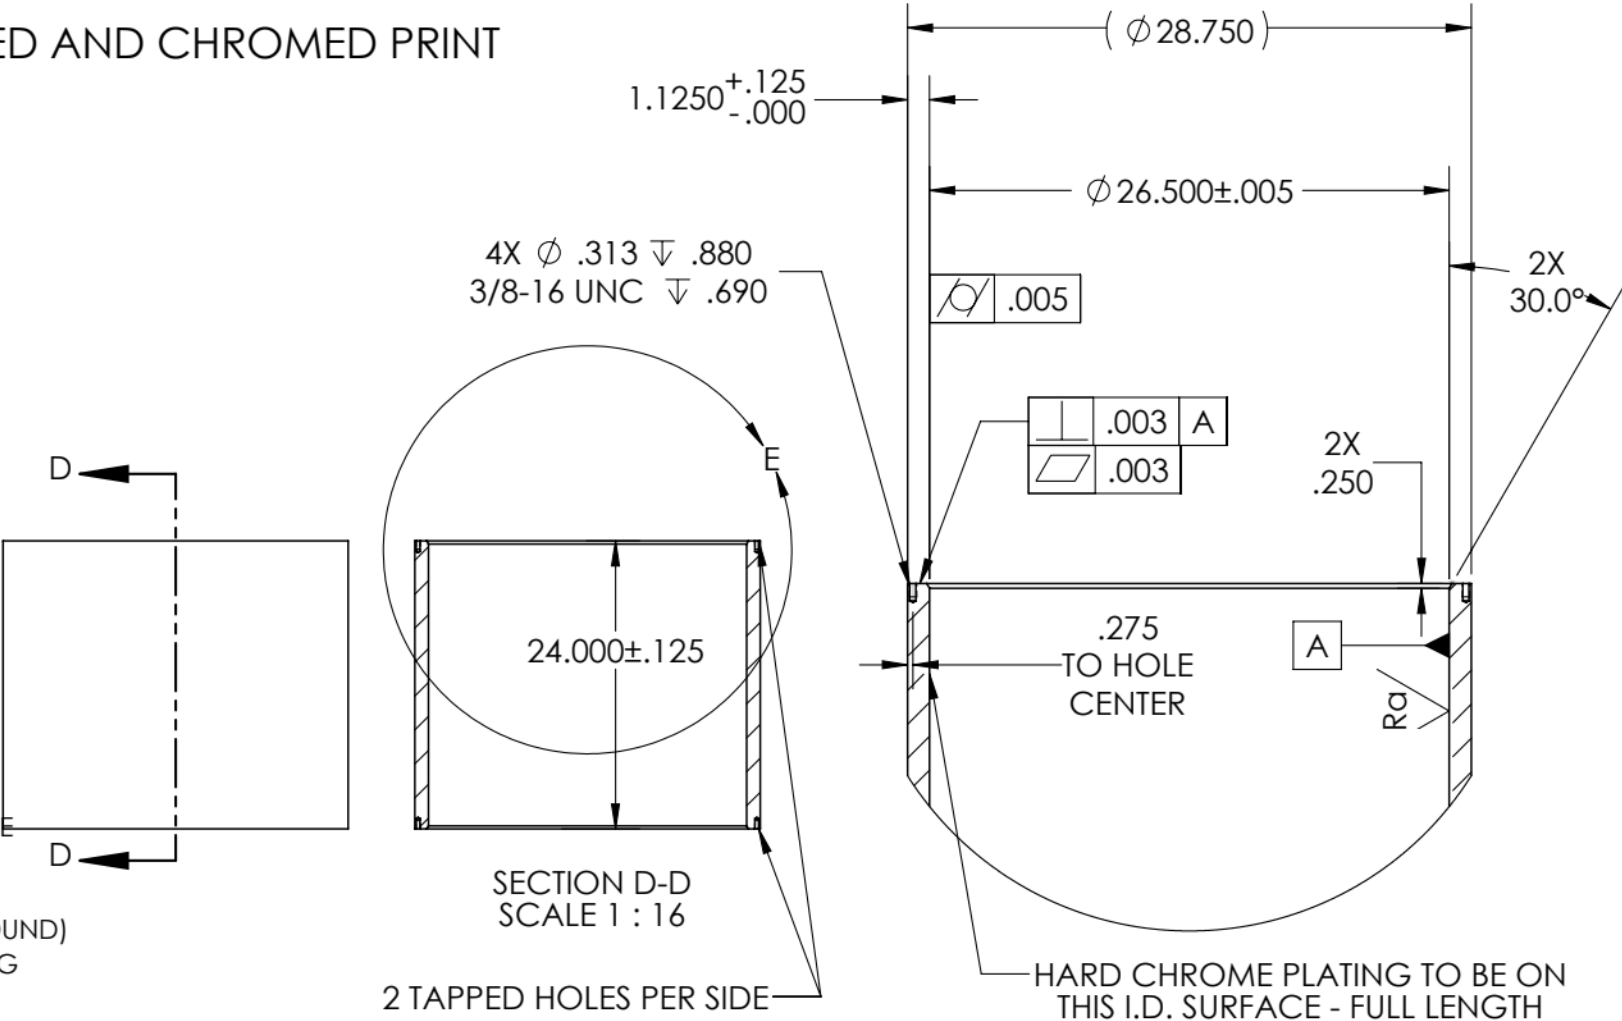

TOLERANCE UNLESS SPECIFIED BASED ON			1. ALL INFORMATION ON THIS DRAWING IS CONSIDERED		TITLE		IDC 26.500 24.000 FINISHED		RFV	
DIMENSION	.XXX $\pm$.005 .XX $\pm$.015 .X $\pm$.020	PER RMA-A3	DISCLOSED TO OTHERS WITHOUT WRITTEN CONSENT FROM OHI. 2. APPLICATION INFORMATION, OPERATING PARAMETERS, AND DESIGNS ARE FOR REFERENCE 3a321af8-eb78-4c50-a177-ec948abfe95a		DRAFT	DATE	CHECK	DATE	SCALE	SHEET #
ANGLE	.X $\pm$ 1.0	$\pm$ 4.0			AM	16-06-2025	SA	16-06-2025	NTS	1 of 2
FINISH	32 RMS	RMA-F3			DRAWING#					
BREAK EDGE	.005 MAX									

RAW TUBE PRINT

RECIEVING STANDARD

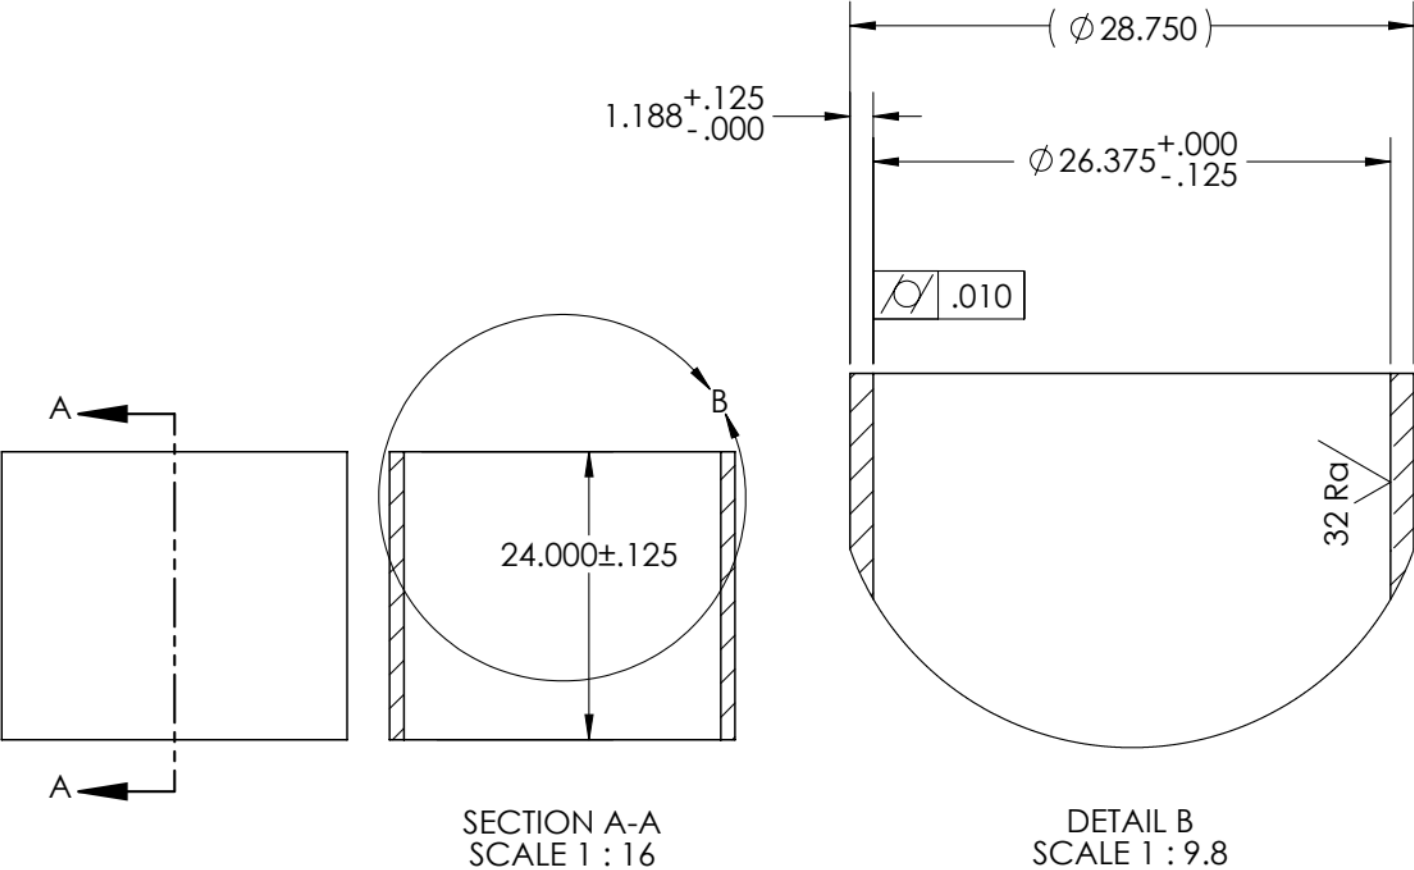

- 64-128RMS ACCEPTABLE
UNLESS SPECIFIED
- THICKNESS(T) BASED ON 75,000
PSI MINIMUM MATERIAL YIELD
STRENGTH - THICKNESS CAN BE
REVIEWED/CHANGED BASED
ON HIGHER STRENGTH
- MATERIAL CANNOT BE LOWER
THAN 75,000 PSI MINIMUM
YIELD STRENGTH

Mechimix			1.ALL INFORMATION ON THIS	TITLE	REV A
	$\bar{X} \pm .010$ $\pm .020$	RMA-A3	2.APPLICATION INFORMATION, OPERATING PARAMETERS, AND DESIGNS ARE FOR REFERENCE		
ANGLE	$\bar{X} \pm 1.0$	± 4.0	1	AIM	10-06-2023
FINISH	32 RMS	RMA-F3	SA	10-06-2023	NIS
BREAK EDGE	.005 MAX		DIN HEAVY	1113 URSULINE AVE	DRAWING#
			4 of 2		