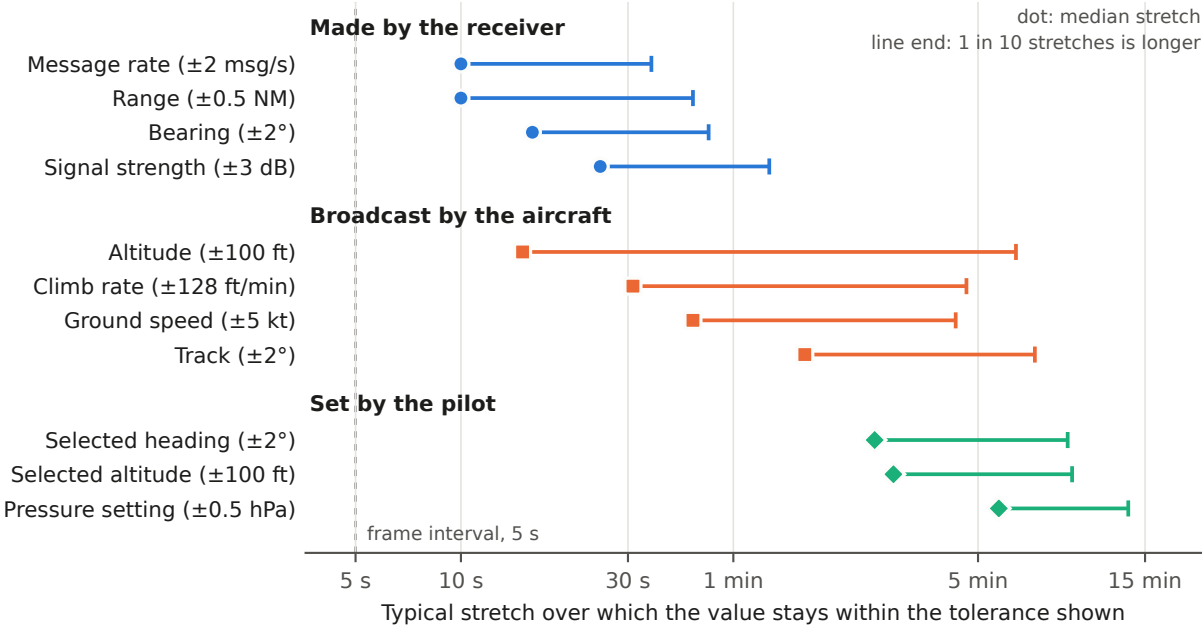
Made by the receiver
dot: median stretch
line end: 1 in 10 stretches is longer
Message rate (±2 msg/s)
Range (±0.5 NM)
Bearing (±2°)
Signal strength (±3 dB)
Broadcast by the aircraft
Altitude (±100 ft)
Climb rate (±128 ft/min)
Ground speed (±5 kt)
Track (±2°)
Set by the pilot
Selected heading (±2°)
Selected altitude (±100 ft)
Pressure setting (±0.5 hPa)
frame interval, 5 s
5 s
10 s
30 s
1 min
5 min
15 min
Typical stretch over which the value stays within the tolerance shown