RELIABLE SOLUTIONS

Integral Power Solutions Pvt. Ltd.



FUTURE LED LIGHTS

Integral Power Solutions Pvt. Ltd.







6 KW ON GRID SOLAR SYSTEM

LED SLIM DOWNLIGHT

IPS-DNR-6, IPS-DNR-7.5




- SLIM PROFILE
- LOW HEAT DISSIPATION
- LIFE SPAN > 35000 Hrs
- PRACTICALLY ZERO MAINTENANCE

Technical Specification :

SAP CODE : 2002022314

Type	IPS-DNR-6, IPS-DNR-7.5/8W
CCT	6000K (Cool White)
Typical Power Consumption	6 Watts ± 1Watt
Luminous Flux (Lm)	@ 600 Lm
Input Voltage	100-265 V AC
Operational Temp. Range	0-45 Deg Cent.
Typical Luminous Efficiency	>80 Lum /W
CRI	> 80 %
Beam Angle	120 deg
Warranty	2 years
Application	Offices, Conference Room, Shops
Outline Dimensions	125 mm x 14 mm Cutout 105mm
Net Wt.	@ 500 gms.



The LED Lamp Advantage :

- **More energy-efficient than halogen :** LED lamps, very efficacious in converting power into light, may achieve over 70% of power saving as compared with traditional halogen lamps.
- **Long Lifespan :** The averaged lifespan of LED lamps is at least 10 times that of halogen lamps, eliminating the need for frequant replacements.
- **Healthy Light :** Except particular applications such as tanning booths, Mosquito killers and so on, LED lamps for general lighting emit neither ultraviolet (UV) nor infrared (IR) that may health.
- **Environment Friendly :** LED lamps do not contain mercury, sodium, and other hazardous chemical elements, possibly necessary for certain traditional light sources and unfriendly to the ecological environment.
- **Low Power Consumption :** Under the condition of the same output light, LED lamps consume less input power than traditional lamps, reimbursing you by reducing power bill.
- **No Perceptible Flickering :** Traditional lamps driven by an AC current with a relatively low frequency may produce perceptible flickering that may lead to eye discomfort or injury while LED lamps driven by a DC current with a relatively high frequency will not.
- **High Luminous Efficacy :** The increasingly high luminous efficacy (lm/W) of LED lamps provides more light output (lm) with less power input (W), turning LED lamps into the mainstream in the lighting industry.

Features

Indoor use, Power factor, High power efficiency, High luminous efficacy LEDs
No UV or IR radiation, Cool light can reduce the rise of the ambient temperature
Energy saving and environment friendly

Option : Square type recess and surface mounted panel lights available.

Design specifications subject to change

LED SLIM DOWNLIGHT

IPS-DNR-12, IPS-DNR-15, IPS-DNR-20




- SLIM PROFILE
- LOW HEAT DISSIPATION
- LIFE SPAN > 35000 Hrs
- PRACTICALLY ZERO MAINTENANCE

Technical Specification :


RIL SAP CODE : 2001547409

Type	IPS-DNL-SL-15, IPS-DNR-12
CCT	6000K (Cool White)
Typical Power Consumption	12 Watts / 15 Watts / 20 Watts
Luminous Flux (Lm)	@1000 Lm / @1200 Lm / @1500 Lm
Input Voltage	100-265 V AC
Operational Temp. Range	0-45 Deg Cent.
Typical Luminous Efficiency	>80 Lum /W
Power Factor	> 0.9
CRI	> 80 %
Beam Angle	120 deg
Warranty	2 years
Application	Offices, Conference Room, Shops
Outline Dimensions	As shown in figure
Net Wt.	1 Kg.

12 & 15 Watt



20 Watt



The LED Lamp Advantage :

- **More energy-efficient than halogen :** LED lamps, very efficacious in converting power into light, may achieve over 70% of power saving as compared with traditional halogen lamps.
- **Long Lifespan :** The averaged lifespan of LED lamps is at least 10 times that of halogen lamps, eliminating the need for frequant replacements.
- **Healthy Light :** Except particular applications such as tanning booths, Mosquito killers and so on, LED lamps for general lighting emit neither ultraviolet (UV) nor infrared (IR) that may health.
- **Environment Friendly :** LED lamps do not contain mercury, sodium, and other hazardous chemical elements, possibly necessary for certain traditional light sources and unfriendly to the ecological environment.
- **Low Power Consumption :** Under the condition of the same output light, LED lamps consume less input power than traditional lamps, reimbursing you by reducing power bill.
- **No Perceptible Flickering :** Traditional lamps driven by an AC current with a relatively low frequency may produce perceptible flickering that may lead to eye discomfort or injury while LED lamps driven by a DC current with a relatively high frequency will not.
- **High Luminous Efficacy :** The increasingly high luminous efficacy (lm/W) of LED lamps provides more light output (lm) with less power input (W), turning LED lamps into the mainstream in the lighting industry.

Features

Indoor use, Power factor, High power efficiency, High luminous efficacy LEDs
No UV or IR radiation, Cool light can reduce the rise of the ambient temperature
Energy saving and environment friendly

Option : Square type recess and surface mounted panel lights available.

Design specifications subject to change

SQ FIXTURE

IPS-SQ-36R (RECESS MOUNTING)
IPS-SQ-36R1 (RECESS MOUNTING)



RIL SAP CODE -2001511033

Electrical	System Power	36 Watt ± 2%
	Input Voltage	240V, 50Hz
	operating Voltage Range	100 Volt AC- 300 Volt AC
	Start up Low Voltage	100 Volt AC
	Input Current	0.180A
	Frequency	50-60Hz
	Power Factor	Pf >.98 @ 230V
	THD	<15%
	Efficiency	>85%
Optical	Luminous Flux	3780 lm
	Luminous Efficacy	105lm/w
	Color Temperature (CCT)	Cool White (6500K)
	CRI	70
Safety	Protections (Electronic Driver)	Short Circuit
		Open Circuit
		Over Voltage
		Surge Rating (up to 3kv)
LED	Type of LED	Mid Power LED
	LED Beam Angle	Wide Beam angle (up to 120 °)
	LED Lumens	More than 120 lm/w
	LED Life	50000Hr
other	Cut out (L x W x H)	580 x 580 x 65mm
	LED Make	LG
	Material for LED Engine	Metal Core PCB
	Light Diffuser	Mitsubhishi
	LED Driver Make	LEO / Phillips / Equivalent
	Warranty:	2 year

THIS 2X2 , 36W LED FIXTURE REPLACES WIPRO MAKE 36W 2X2 FIXTURE LM11-036

The LED Lamp Advantage :

- **More energy-efficient than halogen :** LED lamps, very efficacious in converting power into light, may achieve over 70% of power saving as compared with traditional halogen lamps.
- **Long Lifespan :** The averaged lifespan of LED lamps is at least 10 times that of halogen lamps, eliminating the need for frequent replacements.
- **Healthy Light :** Except particular applications such as tanning booths, Mosquito killers and so on, LED lamps for general lighting emit neither ultraviolet (UV) nor infrared (IR) that may health.
- **Environment Friendly :** LED lamps do not contain mercury, sodium, and other hazardous chemical elements, possibly necessary for certain traditional light sources and unfriendly to the ecological environment.
- **Low Power Consumption :** Under the condition of the same output light, LED lamps consume less input power than traditional lamps, reimbursing you by reducing power bill.
- **No Perceptible Flickering :** Traditional lamps driven by an AC current with a relatively low frequency may produce perceptible flickering that may lead to eye discomfort or injury while LED lamps driven by a DC current with a relatively high frequency will not.
- **High Luminous Efficacy :** The increasingly high luminous efficacy (lm/W) of LED lamps provides more light output (lm) with less power input (W), turning LED lamps into the mainstream in the lighting industry.

Features

Indoor use , Power factor, High power efficiency, High luminous efficacy LEDs
No UV or IR radiation, Cool light can reduce the rise of the ambient temperature
Energy saving and environment friendly

Design specifications subject to change

T8 INTEGRATED LED TUBE LIGHT

IPS-T8-120-18 IT



This LED Tubelight T8 type does not require any fixture and is easy to mount

This 18W Tubelight replaces conventional 36/40W Fluorescent tube. Has a long life as it uses Aluminium base for LED Pcb and has a Diffused Polycarbonate cover.


Technical Specification :

RIL SAP CODE... 2001948556

Material	Aluminium & frosted PC
	(Aluminium base diffused poly cover)
	Cable provided
LED Quality	@ 96-120 nos.
Type of LED	SMD 2835
Rated Power	18W+/- 1W
Input Voltage	100 VAC – 265 VAC
Luminous Flux	1500lm+- 5% (frosted PC)
Luminous Efficiency	@ 85 lm/w

Color Temperature	Warm White 3000K
	Cool White 6000K-6500K
Viewing Angle	180.. Degree
Color Rendering Index	>70
Power Factor	>-0.92
Frequency	50-60Hz
Equal to Traditional Fluorescent Tube	36/40W
Environment Temperature	-20Deg – 50 Deg Centi.
Environment Humidity	<95%
Life	40,000 hrs.

9W/600 mm and 5W/300 mm models also available on request.

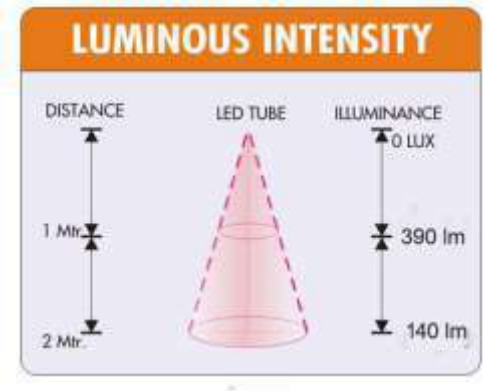

Features:

- No Mercury used – Green Energy
- Reduces consumption drastically while maintaining light output
- Light remains same even at lower (100 Volts) input voltages
- No replacement of Chock / Starter
- Practically – No Maintenance
- Makes possible to convert lighting loads on Solar Energy
- Reduces load on Air Conditioner because heat produced is drastically reduced.
- Long life – Minimum 30,000 hrs to 50,000 hrs.
- No ultraviolet radiation as compared to regular tubes & CFL's

Features:

Retrofit 18 watt LED tubelight also available

RIL SAP CODE For 18 Watt Retrofit : 2001467822

Design specifications subject to change

LED STREET LIGHTS

IPS-SL-36



Technical Specification :

Type	IPS-SL-36
Input Voltage :	90-265 VAC
Frequency Range	45-53Hzs
Power factor	> 0.9
Total Harmonic Distortion	< 30%
Light Source	1W X 30 LED'S WITH IN BUILT LENS
Tatal Power Consumption	@38W (Incl. Driver - MEANWELL OR EQ.)
LED Luminious Efficiency	> 85 lm/w
LED Initial Flux	@ 3200 lum
Average illumination at	
4 M HEIGHT	80 lum
6 M HEIGHT	30 lum
7 M HEIGHT	
9 M HEIGHT	
Colour Temperature	6500K (Cool White)
Colour Rendering Index	> 70
Working Temperature	Up to 50degree centigrade
IP Rating	IP 65
Working Life	>50000 Hrs
Light Beam Angle	150 degree lens Led
Housing Material	Aluminium Alloy

LED STREET LIGHTS

IPS-SL-60W



Technical Specification :

Type	IPS-SL-60W
Input Voltage :	90-265 VAC
Frequency Range	45-53Hzs
Power factor	> 0.9
Total Harmonic Distortion	< 30%
Light Source	SMD 3030 Osram or equivalent NO Optical Lenses
Tatal Power Consumption	@60W (Incl. Driver)
LED Luminious Efficiency	> 85 lm/w
LED Initial Flux	@ 6000 lum
Average illumination at	± 5%
Colour Temperature	6500K (Cool White)
Colour Rendering Index	> 70
Working Temperature	Up to 50degree centigrade
IP Rating	IP 65
Working Life	>50000 Hrs
Light Beam Angle	150 degree lens Led
Housing Material	Aluminium Alloy

Driver-Meanwell OR EQU : Osram/Phillips

MEANWELL TAIWAN DRIVER
WITH AUTO RESET USED.

Option :

Available Models with SAP CODE

IPS-SL-30	2001543455
IPS-SL-36	2001640239
IPS-SL-45	2001543783
IPS-SL-48	2001501875



Design specifications subject to change

LED STREET LIGHTS

IPS-SL-90



Technical Specification :

RIL SAP CODE: 2001959050

Type	IPS-SL-90
Input Voltage :	90-265 VAC
Frequency Range	45-53Hzs
Power factor	> 0.9
Total Harmonic Distortion	< 20%
Light Source	1X70 LED's with inbuilt lenses
Tatal Power Consumption	92W
LED Luminious Efficiency	> 80 lm/w
LED Initial Flux	@ 8500 lum
Average illumination at	± 5%
4 M Height	160 lum
6 M Height	70 lum
7 M Height	50 lum
9 M Height	25 lum
Colour Temperature	6500K (Cool White)
Colour Rendering Index	> 70
Working Temperature	Up to 55degree centigrade
IP Rating	IP 65
Working Life	>50000 Hrs
Light Beam Angle	120 degree lens Led
Housing Material	Aluminium Alloy Dia....450X250X70mm

LED's with inbuilt Lens & Driver-Meanwell OR EQU

MEANWELL TAIWAN DRIVER WITH AUTO RESET USED.

Option :

Available Models with SAP CODE

IPS-SL-30	2001543455
IPS-SL-36	2001640239
IPS-SL-45	2001543783
IPS-SL-48	2001501875



Design specifications subject to change

LED STREET LIGHTS

IPS-SL-120



Technical Specification :

Type	IPS-SL-120
Input Voltage :	90-265 VAC
Frequency Range	45-53Hzs
Power factor	> 0.9
Total Harmonic Distortion	< 20%
Light Source	1WX96 LED's
Tatal Power Consumption	120W
LED Luminious Efficiency	> 80 lm/w
LED Initial Flax	10500 lum
Average illumination at	± 5%
4 M Height	210 lum
6 M Height	90 lum
7 M Height	65 lum
9 M Height	38 lum
Colour Temperature	6500K (Cool White)
Colour Rendering Index	> 70
Working Temperature	Up to 55degree centigrade
IP Rating	IP 65
Working Life	>50000 Hrs
Light Beam Angle	150 degree Horizontal Axis and 60 degree Vertical Axis
Housing Material	Aluminium Alloy

LED's with inbuilt Lens Used
Driver-Meanwell CLG-150 Used
OR EQU

MEANWELL TAIWAN DRIVER
WITH AUTO RESET USED.



Design specifications subject to change

HIGH BAY / MID BAY LAMP

IPS-HB-80-100/120/150



High bay/Mid bay Lamp with IP65 Protection. Extremely useful for Halls. Warehouses as well as production shopfloor.
Uses Meanwell or equivalent drivers and smd LED's LM80 tested.

SAP CODE: 80W - 2002049693
SAP CODE: 120W - 2001995841

Specifications

Power consumption	IPS- HB-80 IPS- HB-100 IPS-HB-120 IPS-HB-150
LED Color temperature	3000K/6000K
Beam Angle	120
Optical Cover	PC Cover
Light Source	3030(LM-80)
Housing Material	Aluminium Pressure Die-Cast
Power Requirement	AC 100-240v, 50 - 60Hz
Protection Rating	IP 65
Luminous Flux	@ 7600 lm @9500lm @11500lm @14750 lm
CRI	80Ra
operation Temperature	-10 -55 C
Driver	Integral Driver (MWEeanwell Or Eq.)
Power factor	>0.95
Warranty	2 Year
SPD (Surge Protection)	2.5 Kv

The LED Lamp Advantage :

- **More energy-efficient than halogen :** LED lamps, very efficacious in converting power into light, may achieve over 70% of power saving as compared with traditional halogen lamps.
- **Long Lifespan :** The averaged lifespan of LED lamps is at least 10 times that of halogen lamps, eliminating the need for frequant replacements.
- **Healthy Light :** Except particular applications such as tanning booths, Mosquito killers and so on, LED lamps for general lighting emit neither ultraviolet (UV) nor infrared (IR) that may health.
- **Environment Friendly :** LED lamps do not contain mercury, sodium, and other hazardous chemical elements, possibly necessary for certain traditional light sources and unfriendly to the ecological environment.
- **Low Power Consumption :** Under the condition of the same output light, LED lamps consume less input power than traditional lamps, reimbursing you by reducing power bill.
- **No Perceptible Flickering :** Traditional lamps driven by an AC current with a relatively low frequency may produce perceptible flickering that may lead to eye discomfort or injury while LED lamps driven by a DC current with a relatively high frequency will not.
- **High Luminous Efficacy :** The increasingly high luminous efficacy (lm/W) of LED lamps provides more light output (lm) with less power input (W), turning LED lamps into the mainstream in the lighting industry.

Features

Indoor use, Power factor >0.95 at 115 VAC, Power Factor >0.9 at 230VAC
High power efficiency >85% , High luminous efficacy LEDs, No UV or IR radiation,
Cool light can reduce the rise of the ambient temperature, Energy saving and environment friendly

Design specifications subject to change

LED FLOOD LIGHT

IPS-FL-50W



RIL SAP Code - 2001552510

Technical Specification :

Type	IPS-FL-50W
Input Voltage :	90-265 VAC
Frequency Range	50 Hzs ± 2 Hz
Power factor	> -0.95
Total Harmonic Distortion	< 30%
Light Source	100-150W FLIP CHIP WITH TEMP. PROTECTION
Total Power Consumption	52W INCLUSIVE DRIVER
LED Luminious Efficiency	> 80 Lm
LED Initial Flux	4500 lm
Cable Entry	Bottom
Front Glass	Clear - Toughned Glass
Reflector	Wide angle rectangular Aluminium
Driver	Meanwell or Equivalent Driver
Colour Temperature	6500K (Cool White)
Colour Rendering Index	> 70
Working Temperature	Up to 50 degree centigrade
IP Rating	IP 65
Working Life	> 35000 Hrs
Housing Material	Aluminium Alloy Casting

This 150W LED floodlight Replaces A 250 W MH/HPSV Floodlight for use in specific Area Lighting Applications. Has a Long Life Practically no Maintenance over years. Has a life of@ 40000-50000 burning hours As Against 6000-8000 Hours in case of MH/HPSV lamps. Generates very low heat as Compaired to MH/HPSV lamps, has Advantage of instant start (Zero pick currents) Reduces size of cables required. There is no change In illumination Level over wide range of As supply 90V-300VAC. no Flicked, Light Spectrum is Such that insects are not
Attracted to light power factor is -0.9 Under all input and load conditions. Life of 50000 Burning HRS with 12 HRS Usage A day Means Life os 10 Years +

Option :

141W (IPS-FL-141) RIL SAP Code - 2001621628
171W (IPS-FL-171) RIL SAP Code - 2001621627
50W (IPS-FL-50) RIL SAP Code - 2001552510
10W (IPS-FLM-10) RIL SAP Code - 2001780693



Design specifications subject to change

LED FLOOD LIGHT

IPS-FL-141W



Technical Specification :

RIL SAP CODE - 2001621628

Type	IPS-FL-141
Input Voltage :	90-265 VAC
Frequency Range	45-53Hzs
Power factor	> -0.95
Total Harmonic Distortion	< 20%
Light Source	50W COBX3 WITH LENSES (THERMALLY PROTECTED)
Total Power Consumption	141W
LED Luminious Efficiency	> 85 Lm
LED Initial Flux	11985 lm
Average illumination at	Typ.
4 M Height	295 lum
6 M Height	195 lum
Protections	Over Voltage, short circuit, over, temp with Auto Reset
	MEANWELL TAIWAN DRIVER OR EQ USED.
Colour Temperature	6500K (Cool White)
Colour Rendering Index	> 70
Working Temperature	Up to 80 degree centigrade
IP Rating	IP 65
Working Life	> 50000 Hrs
Light Beam Angle	150 deg Horizontal Axis and 60 deg Vertical Axis
Housing Material	Aluminium Alloy

This 150W LED floodlight Replaces A 250 W MH/HPSV Floodlight for use in specific Area Lighting Applications. Has a Long Life Practically no Maintenance over years. Has a life of@ 40000-50000 burning hours As Against 6000-8000 Hours in case of MH/HPSV lamps. Generates very low heat as Compaired to MH/HPSV lamps, has Advantage of instant start (Zero pick currents) Reduces size of cables required. There is no change In illumination Level over wide range of As supply 90V-300VAC. no Flicked, Light Spectrum is Such that insects are not Attracted to light power factor is -0.9 Under all input and load conditions. Life of 50000 Burning HRS with 12 HRS Usage A day Means Life os 10 Years +

Option :

171W (IPS-FL-171) RIL SAP Code - 2001621627
50W (IPS-FL-50) RIL SAP Code - 2001552510
10W (IPS-FLM-10) RIL SAP Code - 2001780693



Design specifications subject to change

LED FLOOD LIGHT

IPS-FL-150W



RIL SAP Code - 2001621038

Technical Specification :

Type	IPS-FL-150W
Input Voltage :	90-305 VAC
Frequency Range	45-53Hzs
Power factor	> -0.95
Total Harmonic Distortion	< 15%
Light Source	100W COBX3 WITH IN-BUILT LENSES (THERMALLY PROTECTED)
Total Power Consumption	150W
LED Luminious Efficiency	> 85 Lm
LED Initial Flax	13000 lm
Average illumination at	Typ.
4 M Height	615 lum
6 M Height	245 lum
Protections	Over Voltage, short circuit, over, temp with Auto Reset
	MEANWELL TAIWAN DRIVER OR EQ USED.
Colour Temperature	6500K (Cool White)
Colour Rendering Index	> 70
Working Temperature	Up to 80 degree centigrade
IP Rating	IP 65
Working Life	> 50000 Hrs
Light Beam Angle	120 deg for in-built lenses (90 deg optional)
Housing Material	Aluminium Alloy

This 150W LED floodlight Replaces A 250 W MH/HPSV Floodlight for use in specific Area Lighting Applications. Has a Long Life Practically no Maintenance over years. Has a life of@ 40000-50000 burning hours As Against 6000-8000 Hours in case of MH/HPSV lamps. Generates very low heat as Compaired to MH/HPSV lamps, has Advantage of instant start (Zero pick currents) Reduces size of cables required. There is no change In illumination Level over wide range of As supply 90V-300VAC. no Flicked, Light Spectrum is Such that insects are not
Attracted to light power factor is -0.9 Under all input and load conditions. Life of 50000 Burning HRS with 12 HRS Usage A day Means Life os 10 Years +

Option :

141W (IPS-FL-141) RIL SAP Code - 2001621628
171W (IPS-FL-171) RIL SAP Code - 2001621627
50W (IPS-FL-50) RIL SAP Code - 2001552510
10W (IPS-FLM-10) RIL SAP Code - 2001780693



Design specifications subject to change

LED FLOOD LIGHT

IPS-FL-200W



Technical Specification :

RIL SAP Code - 2001860298

Input Voltage :	90-305 VAC
Frequency Range	45-53Hzs
Power factor	> -0.95
Total Harmonic Distortion	< 15%
Light Source	100W COB CHIPS WITH LENSES X 3 (THERMALLY PROTECTED)
Total Power Consumption	200W
LED Luminious Efficiency	> 85 Lm
LED Initial Flax	19000 lm
Average illumination at	Typ.
4 M Height	640 lum
6 M Height	350 lum
Protections	Over Voltage, short circuit, over, temp with Auto Reset
	MEANWELL DRIVER OR EQ USED.
Colour Temperature	6500K (Cool White)
Colour Rendering Index	> 70
Working Temperature	Up to 50 degree centigrade
IP Rating	IP 65
Working Life	> 50000 Hrs
Light Beam Angle	Lens angle 120 deg / 90 deg
Housing Material	Aluminium Alloy

This 200W LED floodlight Replaces A 400 W MH/HPSV Floodlight for use in specific Area Lighting Applications. Has a Long Life Practically no Maintenance over years. Has a life of@ 40000-50000 burning hours As Against 6000-8000 Hours in case of MH/HPSV lamps. Generates very low heat as Compaired to MH/HPSV lamps, has Advantage of instant start (Zero pick currents) Reduces size of cables required. There is no change In illumination Level over wide range of As supply 90V-305/AC. no Flicked, Light Spectrum is Such that insects are not Attracted to light power factor is -0.9 Under all input and load conditions. Life of 50000 Burning HRS with 12 HRS Usage A day Means Life os 10 Years +



Design specifications subject to change

LED FLOOD LIGHT

IPS-FL-250W



Technical Specification :

RIL SAP CODE : 2001994328

Input Voltage :	90-305 VAC
Frequency Range	45-53Hzs
Power factor	> -0.90
Total Harmonic Distortion	< 15%
Light Source	100/150W COB CHIPS WITH LENSES X 3 (THERMALLY PROTECTED)
Total Power Consumption	250W (Incl Driver)
LED Luminious Efficiency	> 80 Lm
LED Initial Flax	24500 lum
Average illumination at	Typ.
4 M Height	1020 lum
6 M Height	470 lum
Protections	Over Voltage, short circuit, over, temp with Auto Reset
	MEANWELL DRIVER OR EQ USED.
Colour Temperature	6500K (Cool White)
Colour Rendering Index	> 70
Working Temperature	Up to 55 degree centigrade
IP Rating	IP 65
Working Life	> 50000 Hrs
Light Beam Angle	120 deg for in-built lenses (90 deg optional)
Housing Material	Aluminium Alloy

This 250W LED floodlight Replaces A 500 W MH/HPSV Floodlight for use in specific Area Lighting Applications. Has a Long Life Practically no Maintenance over years. Has a life of@ 40000-50000 burning hours As Against 6000-8000 Hours in case of MH/HPSV lamps. Generates very low heat as Compaired to MH/HPSV lamps, has Advantage of instant start (Zero pick currents) Reduces size of cables required. There is no change In illumination Level over wide range of As supply 90V-305/AC. no Flicked, Light Spectrum is Such that insects are not Attracted to light power factor is -0.9 Under all input and load conditions. Life of 50000 Burning HRS with 12 HRS Usage A day Means Life os 10 Years +



Design specifications subject to change

LED LAMP
IPS-LBS-10 (220 VDC)



RIL SAP CODE: 2002060304

LED LAMP 360 DEG ANGLE,SPECIAL PCB DESIGN TO TAKE CARE OF COOLING,ANTI VIBRATION MOUNTED DRIVER AND COMPACT LAMP FIXTURE DESIGN. BASE HOLDERS AVAILABLE E27/B22. APPLICATION---LOW BAY /DG ROOMS/REPLACEMENT OF CFL's IN PASSAGES .REPLACES 60W GLS LAMP.

Specifications

Type	IPS-LBS-10(220VDC)
CCT	6000K
Typical Power Consumption	9.4W-10.4W
Luminous Flux (lm)	850 'um
Input Voltage	220V DC
Operation Temp. Range	0-50 deg centigrade
Typical Luminous Efficacy	80 lum/w
CRI	>70
Beam Angle	360 deg
LED Source	SMD LED's
Applications	Shopfloor Warehouses,Stores,Malls,Replacement of 18 CFL Lamps
Lamp Holder	B22
Outline Dim.	D= 52mm,L=122 mm
Net. Weight	@100 gms

Photo is indicative only.size and qty of led's subject to changes with design over period.

The LED Lamp Advantage:

- **More energy-efficient than halogen :** LED lamps, very efficacious in converting power into light, may achieve over 70% of power saving as compared with traditional halogen lamps.
- **Long Lifespan :** The averaged lifespan of LED lamps is at least 10 times that of halogen lamps, eliminating the need for frequent replacements.
- **Healthy Light :** Except particular applications such as tanning booths, mosquito killers and so on, LED lamps for general lighting emit neither ultraviolet (UV) nor infrared (IR) that may harm health.
- **Environment Friendly :** LED lamps do not contain mercury, sodium, and other hazardous chemical elements, possibly necessary for certain traditional light sources and unfriendly to the ecological environment.
- **Low Power Consumption :** Under the condition of the same output light, LED lamps consume less input power than traditional lamps, reimbursing you by reducing power bill.
- **No Perceptible Flickering :** Traditional lamps driven by an AC current with a relatively low frequency may produce perceptible flickering that may lead to eye discomfort or injury while LED lamps driven by a DC current with a relatively high frequency will not.
- **High Luminous Efficacy :** The increasingly high luminous efficacy (lm/W) of LED lamps provides more light output (lm) with less power input (W), turning LED lamps into the mainstream in the lighting industry.
- **No UV in Light Spectrum:**Does not attract insects and keeps place clean.

Features

- Indoor use
- Power factor >
- High power efficiency > 85%
- High luminous efficacy LEDs
- No UV or IR radiation
- Cool light can reduce the rise of the ambient temperature
- Energy saving and environment friendly

Specifications are subject to design changes

WELL GLASS LED LAMP

IPS-WG-40NFM (Safe Area)



LED WELLGLASS FIXTURE USED IN SAFE AREA. LED COB WITH THERMAL PROTECTION AND MEANWELL OR EQUIVALENT DRIVER USED. APPLICATION IN WARE HOUSE , SHOPFLOOR etc.

TECHNICAL SPECIFICATION:

TYPE	IPS-WG-40 NFM
INPUT VOLTAGE	90 - 265 V AC (Freq. 50 Hz) (P.F. > 0.96)
POWER CONSUMPTION	40 W (+/- 5 %)
LIGHT SOURCE	100-150W flip chip
CCT	6000 - 6500 K (Cool White)
LUX LEVEL	@ 2 meter = 750Lux & 2.5 meter = 450Lux
LUMINOUS EFFICIENCY	> 85 Lm
OPERATION TEMP.	Up to 50 Degree Centigrade
CRI	> 70
BEAM ANGLE	120deg.
DRIVER	Meanwell or equivalent driver used
OUTLINE DIM.	ALU Plate dia 145mm, fitting hole distance center to center 135mm
NET WEIGHT	@ 1.5 Kg
APPLICATION	Used in WAREHOUSE , SHOP FLOORS.

The LED Lamp Advantage:

- **More energy-efficient than halogen :** LED lamps, very efficacious in converting power into light, may achieve over 70% of power saving as compared with traditional halogen lamps.
- **Long Lifespan :** The averaged lifespan of LED lamps is at least 10 times that of halogen lamps, eliminating the need for frequent replacements.
- **Healthy Light :** Except particular applications such as tanning booths, mosquito killers and so on, LED lamps for general lighting emit neither ultraviolet (UV) nor infrared (IR) that may harm health.
- **Environment Friendly :** LED lamps do not contain mercury, sodium, and other hazardous chemical elements, possibly necessary for certain traditional light sources and unfriendly to the ecological environment.
- **Low Power Consumption :** Under the condition of the same output light, LED lamps consume less input power than traditional lamps, reimbursing you by reducing power bill.
- **No Perceptible Flickering :** Traditional lamps driven by an AC current with a relatively low frequency may produce perceptible flickering that may lead to eye discomfort or injury while LED lamps driven by a DC current with a relatively high frequency will not.
- **High Luminous Efficacy :** The increasingly high luminous efficacy (lm/W) of LED lamps provides more light output (lm) with less power input (W), turning LED lamps into the mainstream in the lighting industry.
- **No UV in Light Spectrum:** Does not attract insects and keeps place clean.

Features

- Indoor use
- Power factor > 0.96
- High power efficiency > 85%
- High luminous efficacy LEDs
- No UV or IR radiation
- Cool light can reduce the rise of the ambient temperature
- Energy saving and environment friendly

Specifications are subject to design changes

WELGLASS LED LAMP

IPS-WG-70NFM



This is wellglass fixture 70W which replaces 160W conventional HPSV/MH lamp. This light makes use of SMD Led's and
Integral make driver
It is provided with 5KA surge protection.

Specifications

RIL SAP CODE: 2001860458

TYPE	IPS-WG-70 NFM
CCT	6000K
Typical Power Consumption	70W
Luminous Flux (IM)	@5600 lm
Input Voltage	120-260 V AC, 50Hzs, PF >0.95 at 230 vac
Operation Temp. Range	0-50 dag centigrade
Typical Luminous Efficacy	80 lum/w
CRI	> 70
Beam Angle	120 dag
LED Source	SMD LED's
Application	Shop floor, Warehouses, Malls, Replacement of 160W.
Outline Dim.	220mm x 225 mm
Net. Weight	@ 3.8 kgs

The LED Lamp Advantage :

- **More energy-efficient than halogen :** LED lamps, very efficacious in converting power into light, may achieve over 70% of power saving as compared with traditional halogen lamps.
- **Long Lifespan :** The averaged lifespan of LED lamps is at least 10 times that of halogen lamps, eliminating the need for frequant replacements.
- **Healthy Light :** Except particular applications such as tanning booths, Mosquito killers and so on, LED lamps for general lighting emit neither ultraviolet (UV) nor infrared (IR) that may health.
- **Environment Friendly :** LED lamps do not contain mercury, sodium, and other hazardous chemical elements, possibly necessary for certain traditional light sources and unfriendly to the ecological environment.
- **Low Power Consumption :** Under the condition of the same output light, LED lamps consume less input power than traditional lamps, reimbursing you by reducing power bill.
- **No Perceptible Flickering :** Traditional lamps driven by an AC current with a relatively low frequency may produce perceptible flickering that may lead to eye discomfort or injury while LED lamps driven by a DC current with a relatively high frequency will not.
- **High Luminous Efficacy :** The increasingly high luminous efficacy (lm/W) of LED lamps provides more light output (lm) with less power input (W), turning LED lamps into the mainstream in the lighting industry.

Features

Indoor use, Power factor >0.95 at 115 VAC, Power Factor >0.9 at 230VAC
High power efficiency >85%, High luminous efficacy LEDs, No UV or IR radiation,
Cool light can reduce the rise of the ambient temperature, Energy saving and environment friendly

Design specifications subject to change

WELGALSS LED LAMP

FLAME PROOF WELGLASS

IPS-WG-63 FP



RIL SAP CODE: 2002043931

Welglass fixture with LED Cob Chip equivalent to conventional 150 WMH Lamp Special Feature is COB Chip is protected with temp sensor to ensure long life.
Fixture used is with certification from Dhanbad Chip is with copper base and Aluminium heatsink to ensure proper Thermal Engineering.
COB chip used is flip chip with/without in build lens has temp protection with auto recovery
Double Compression cable gland is Optional
Flameproof fixture used is CMRI /PESO Certified
Sudhir Switchgear make.

Specifications

TYPE	IPS-WG-63 FP
CCT	6000K- 6500K
Typical Power Consumption	@ 63W
Luminous Flux (lm)	@ 5900 lm
Operation Temp. Range	0-50 deg Centrigrade
Typical Luminous Efficiency	> 80 Lum/W
CRI	> 70
Beam Angle	360 deg
LED Source	100/150W COB with MW or EQ driver used
Application	Shop Floor, Warehouses, Malls, Replacement of
	125W/150W MH/MV LAMPS
Net Weight	@ 4.5 - 5 Kgs


All our products fixtures are approved by CIMFR Dhanbad for Gas group I,IIA,IIB, IIC Zone 1&2 as per IS/IEC:60079-0/2004 & IS/IEC:60079-1/2007
PESO Certification as per Petroleum Act 2002.
Glass : Toughened Glass
Temp : Lowest Temp Class T6/TCase<60°C
Cable Entry : Two Way
Degree of Protection : IP66
Enclosure : Cast Aulminium Alloy LM6 Const.



Design specifications subject to change

LED FLOOD LIGHT

IPS-FL-120S

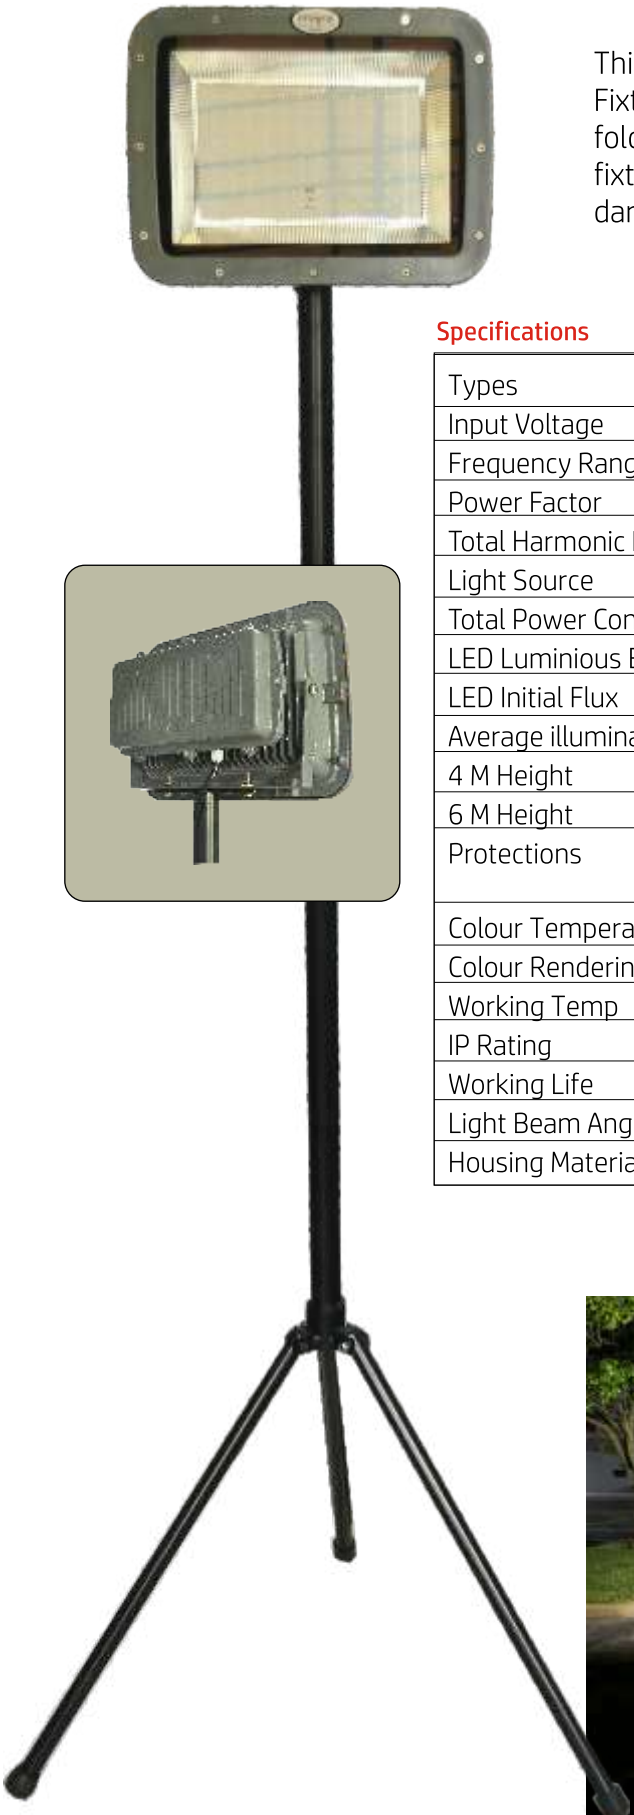

This flood light used SMD Led's assembled on MCPCB. Fixture is IP65 with vent provided to avoid condensation. A foldeble stand of height 1.5 mtrs is provided to mount fixture for construction site applications. Flood light fixture is dark gray while stand is black powder coated.

Specifications

Types	: IPS-FL-120S
Input Voltage	: 100-305 VAC
Frequency Range	: 50 Hzs+/- 3 Hzs
Power Factor	: >-0.9
Total Harmonic Distortion	: <20%
Light Source	: SMD Led's 3030
Total Power Consumption	: 120W+/-5W
LED Luminious Efficiency	: 80lm/w (Indicative) led used are kwality photonics make
LED Initial Flux	: @ 9600 Lum (indicative only)
Average illumination at	:
4 M Height	: -----
6 M Height	: ------
Protections	: Over voltage short circuit over temp with Auto Reset (repower in case of OT)
Colour Temperature	: 6000-6500k
Colour Rendering Index	: > 70
Working Temp	: Up to 55 degree centigrade
IP Rating	: IP 65
Working Life	: >50000 Hrs
Light Beam Angle	: 120 degree
Housing Material	: Aluminium Alloy



Design specifications subject to change

LED POST TOP LAMP

IPS-PTL-15, IPS-PTL-30



USEFUL FOR GARDEN, LAWNS & PERIPHERAL LIGHTING. 15W & 30W RATINGS AVAILABLE. IP65 OUTDOOR APPLICATIONS WITH MEANWELL DRIVER USED. SUITABLE FOR POLE MOUNTING. SPECIALLY DESIGNED CIRCULAR METAL PCB GIVES UNIFORM LIGHT SPREAD. LONG LIFE TYPICALLY >35000 HRS. LIGHT OUTPUT FOR 15 @ 1500 lum FOR 30W @3000 lUM, Luminous efficiency @ 100 lum/w edison/Epistar/Equivalent LED's used.

15 Watt - RIL SAP CODE: 2001621629
30 Watt - RIL SAP CODE: 2001966697

The LED Lamp Advantage :

- **More energy-efficient than halogen :** LED lamps, very efficacious in converting power into light, may achieve over 70% of power saving as compared with traditional halogen lamps.
- **Long Lifespan :** The averaged lifespan of LED lamps is at least 10 times that of halogen lamps, eliminating the need for frequant replacements.
- **Healthy Light :** Except particular applications such as tanning booths, Mosquito killers and so on, LED lamps for general lighting emit neither ultraviolet (UV) nor infrared (IR) that may health.
- **Environment Friendly :** LED lamps do not contain mercury, sodium, and other hazardous chemical elements, possibly necessary for certain traditional light sources and unfriendly to the ecological environment.
- **Low Power Consumption :** Under the condition of the same output light, LED lamps consume less input power than traditional lamps, reimbursing you by reducing power bill.
- **No Perceptible Flickering :** Traditional lamps driven by an AC current with a relatively low frequency may produce perceptible flickering that may lead to eye discomfort or injury while LED lamps driven by a DC current with a relatively high frequency will not.
- **High Luminous Efficacy :** The increasingly high luminous efficacy (lm/W) of LED lamps provides more light output (lm) with less power input (W), turning LED lamps into the mainstream in the lighting industry.

Features

Outdoor use
Power factor
High power efficiency
High luminous efficacy LEDs
No UV or IR radiation
Cool light can reduce the rise of the ambient temperature
Energy saving and environment friendly



Design specifications subject to change

LED SIGNAGE LIGHTS

IPS-SG-GR-BB3, IPS-LED-EX-3W



RIL SAP CODE: 2001550983

Emergency EXIT Signage lighting Wall Mounted with Battery Back up up to 2 Hrs +.
Made up CRCA Sheet Steel 22 SWG with Epoxy polyster powder coating, White in Colour, IP-20 consist of 3 W LED which provides illumination on normal mains power supply and the same lamp continues to provide illumination during mains failure on self contained battery sources. ON resumptions of mains supply, the lamp switches back to the mains automatically & simultaneously starts recharging the battery to the required level provide uninterrupted illumination.
Input : 230 Volts 50 Hz
Lamps : 3 x 1W LED
LED Make : Osram / Edission
Battery Type : Rechargeble Ni Cd/ SLA
Battery Backup Duration : 2 Hours backup + 10%
Charging Type : Constant Voltage Charger Indications : Red LED # ON # indicates charging Equipped with Push to ON test switch. Diffuser cum message panel CAD Designed & cut vinyl on 2 mm thick milky acrylic.





The LED Lamp Advantage :

- **More energy-efficient than halogen :** LED lamps, very efficacious in converting power into light, may achieve over 70% of power saving as compared with traditional halogen lamps.
- **Long Lifespan :** The averaged lifespan of LED lamps is at least 10 times that of halogen lamps, eliminating the need for frequant replacements.
- **Healthy Light :** Except particular applications such as tanning booths, Mosquito killers and so on, LED lamps for general lighting emit neither ultraviolet (UV) nor infrared (IR) that may health.
- **Environment Friendly :** LED lamps do not contain mercury, sodium, and other hazardous chemical elements, possibly necessary for certain traditional light sources and unfriendly to the ecological environment.
- **Low Power Consumption :** Under the condition of the same output light, LED lamps consume less input power than traditional lamps, reimbursing you by reducing power bill.
- **No Perceptible Flickering :** Traditional lamps driven by an AC current with a relatively low frequency may produce perceptible flickering that may lead to eye discomfort or injury while LED lamps driven by a DC current with a relatively high frequency will not.
- **High Luminous Efficacy :** The increasingly high luminous efficacy (lm/W) of LED lamps provides more light output (lm) with less power input (W), turning LED lamps into the mainstream in the lighting industry.

Features

Indoor use

- Power factor > 0.9
- High power efficiency >85%
- High luminous efficacy LEDs
- No UV or IR radiation
- Cool light can reduce the rise of the ambient temperature
- Energy saving and environment friendly



Design specifications subject to change

SAP CODE : 2001932370



TYPES : IPS-BOL-20

LED Bollard Lights of 1 Meter height, with @150 mm illumination area,Dia @160mm with clear and frosted cover. Wattages available 20w. comes in coolwhite(6500k) as well as warm white(3000k).
We use osram led's and MEANWELL or eq driver with 2 years warranty.
Bollard available in 650 mm height also.
Comes with round base plate and cable entry at bottom.Aluminium body grey or siemen's grey painted.

Liner profile achieved with dual colour powder coating (light grey +dark grey)/painting on aluminum.

IPS-WS-15X FM

LED WORK STATION LAMP SERIES
(FLAMEPROOF EXTENDED BACK UP)




Illumination Derails


RIL SAP CODE: 2001647997

Power	A (ix)	B (ix)	C (ix)	D (ix)	E (ix)
5w	22.1	16.3	12.5	9.8	8
10w	29.37	21.57	16.52	13.05	10.57
15w	46.07	33.85	25.9	20.47	16.58

◆ illuminance diagram



Light Distribution Curve



Technical parameter

Item / Model	
Led Consumption	15W
Input Voltage	DC12V
Battery capacity	15,4Ah
Discharge time	12 Hrs +
Charging time	6-7 h
Lithium battery charge and discharge frequency	More than 500 time
Working Environment	working temperature -40°C~60°C working humidity -0~100%
Surface Highest Temperature	⩽ 60°C
Junction Temperature (TJ)	<70°C
Lamp Luminous Efficiency (La/W)	⩾ 95LmW
Led Initial Flux (Lm)	LED Power X 95LM
Lamp Efficiency (S)	⩾ 90%
Color Temperature	2500K ~ 7000K
Color Rendering Index (CRI)	Ra > 80
LED Life Span	> 50000 hrs
Protection Grade	IP65
Lens Light Transmittance	⩾ 90%
Bean Angle	90° ~160°
Net weight	3.7 Kgs
Gross weight	@ 4.5 Kgs
	USES LITHIUM ION BATTERY

The LED Lamp Advantage :

- **More energy-efficient than halogen :** LED lamps, very efficacious in converting power into light, may achieve over 70% of power saving as compared with traditional halogen lamps.
- **Long Lifespan :** The averaged lifespan of LED lamps is at least 10 times that of halogen lamps, eliminating the need for frequant replacements.
- **Healthy Light :** Except particular applications such as tanning booths, Mosquito killers and so on, LED lamps for general lighting emit neither ultraviolet (UV) nor infrared (IR) that may health.
- **Environment Friendly :** LED lamps do not contain mercury, sodium, and other hazardous chemical elements, possibly necessary for certain traditional light sources and unfriendly to the ecological environment.
- **Low Power Consumption :** Under the condition of the same output light, LED lamps consume less input power than traditional lamps, reimbursing you by reducing power bill.
- **No Perceptible Flickering :** Traditional lamps driven by an AC current with a relatively low frequency may produce perceptible flickering that may lead to eye discomfort or injury while LED lamps driven by a DC current with a relatively high frequency will not.
- **High Luminous Efficacy :** The increasingly high luminous efficacy (lm/W) of LED lamps provides more light output (lm) with less power input (W), turning LED lamps into the mainstream in the lighting industry.

Features

- Indoor use
- Power factor
- High power efficiency
- High luminous efficacy LEDs
- No UV or IR radiation
- Cool light can reduce the rise of the ambient temperature
- Energy saving and environment friendly

LED : Work station lamps are poratble lamps with Battery backup suitable for working in areas where access is limited and emergency work has to be carried out.These are extremely. useful since these have feature where light beam angle could be adjusted easily. These come with a portable charger unit so that battery could be charged after usage. This particular lamp is with long 12 hrs + back up 15W with a external battery of 15.4 Ah (Lithium Ion) and special charge Fixture is flameproof certified by ATEX agency.

Design specifications subject to change

IPS-FL-50W FP

50W LED FLOOD LIGHT FP



SAP CODE: 2002344999

All our products fixtures are approved by CIMFR Dhanbad for Gas group I,IIA JIB, IIC Zone 182 as per IS/IEC:60079-0/2004 & IS/IEC 60079-1/2007 PESO Certification as per Petroleum Act 2002.
Glass: Diffused Glare Free Borosilicate based Primary Glass Optics
Temp. Lowest Temp Class T6/Tcase<60 deg cent.
Cable Entry: Two way.
Degree of Protection: IP66
Enclosure: Cast Aluminium Alloy LM6 construction

Specifications

Types	: IPS-FL-50 FP
Input Voltage	: 6000-6500K
Typical Power Consum	: 50 W
Lumious Flux	: 5000 lum
Input Voltage	: 24V AC
Operation Temp. Range	: 0-50 Deg Centigrade
Typical Luminous Effic	: >80 lm/w
CRI	: >70
Beam Angle	: 120 Deg
Outline Dimension	: W270MM, D200MM
Net Wt.	: 5 Kgs

The LED Lamp Advantage :

- **More energy-efficient than halogen :** LED lamps, very efficacious in converting power into light, may achieve over 70% of power saving as compared with traditional halogen lamps.
- **Long Lifespan :** The averaged lifespan of LED lamps is at least 10 times that of halogen lamps, eliminating the need for frequant replacements.
- **Healthy Light :** Except particular applications such as tanning booths, Mosquito killers and so on, LED lamps for general lighting emit neither ultraviolet (UV) nor infrared (IR) that may health.
- **Environment Friendly :** LED lamps do not contain mercury, sodium, and other hazardous chemical elements, possibly necessary for certain traditional light sources and unfriendly to the ecological environment.
- **Low Power Consumption :** Under the condition of the same output light, LED lamps consume less input power than traditional lamps, reimbursing you by reducing power bill.
- **No Perceptible Flickering :** Traditional lamps driven by an AC current with a relatively low frequency may produce perceptible flickering that may lead to eye discomfort or injury while LED lamps driven by a DC current with a relatively high frequency will not.
- **High Luminous Efficacy :** The increasingly high luminous efficacy (lm/W) of LED lamps provides more light output (lm) with less power input (W), turning LED lamps into the mainstream in the lighting industry.

Features

- Indoor use
- Power factor
- High power efficiency
- High luminous efficacy LEDs
- No UV or IR radiation
- Cool light can reduce the rise of the ambient temperature
- Energy saving and environment friendly

Design specifications subject to change

100 W/24
FLAMEPROOF FLOOD LIGHT





TECHNICAL SPECIFICATION

TYPE	IPS-FL-100W FP-24VAC
INPUT VOLTAGE	24V AC
POWER CONSUMPTION	100W (+/-5)
LIGHT SOURCE	SAP CODE: 2002344593
CCT	SMD LED'S (make Osram or equi, led used)
LUMINOUS FLUX	6000-6500K (Cool White
LUMINOUS EFFICIENCY	>9500
OPERATION TEMP.	90 Lm/W
CRI	Up to 55 Degree Centigrade
BEAM ANGLE	>70
DRIVER	120 Degree
OUTLINE DIM.	Meanwell or equivalent driver used
NET WEIGHT	WIDTH-330MM LENGTH-350MM (WITH CLAMP)
APPLICATION	WEIGHT- 13.00Kgs
HOUSING MATERIAL	Aluminium alloy casting

The LED Lamp Advantage :

- **More energy-efficient than halogen :** LED lamps, very efficacious in converting power into light, may achieve over 70% of power saving as compared with traditional halogen lamps.
- **Long Lifespan :** The averaged lifespan of LED lamps is at least 10 times that of halogen lamps, eliminating the need for frequant replacements.
- **Healthy Light :** Except particular applications such as tanning booths, Mosquito killers and so on, LED lamps for general lighting emit neither ultraviolet (UV) nor infrared (IR) that may health.
- **Environment Friendly :** LED lamps do not contain mercury, sodium, and other hazardous chemical elements, possibly necessary for certain traditional light sources and unfriendly to the ecological environment.
- **Low Power Consumption :** Under the condition of the same output light, LED lamps consume less input power than traditional lamps, reimbursing you by reducing power bill.
- **No Perceptible Flickering :** Traditional lamps driven by an AC current with a relatively low frequency may produce perceptible flickering that may lead to eye discomfort or injury while LED lamps driven by a DC current with a relatively high frequency will not.
- **High Luminous Efficacy :** The increasingly high luminous efficacy (lm/W) of LED lamps provides more light output (lm) with less power input (W), turning LED lamps into the mainstream in the lighting industry.

Features

- Indoor use
- Power factor > 0.9
- High power efficiency >85%
- High luminous efficacy LEDs
- No UV or IR radiation
- Cool light can reduce the rise of the ambient temperature
- Energy saving and environment friendly

Design specifications subject to change

IPS-T8-120-18x1 FLM

18 WATT FLAME PROOF FIXTURE



GAS GROUPS	IIA & IIB AS PER IS:2148-1981 AND IS:2206 (PART-1)1984
DEG OF PROTECTION	IP-65 PROTECTION AS PER IS:13947-1993 (PART-1)
CONSTRUCTION	ALUMINIUM ALLOY LM-6 CONSTRUCTION.
REFLECTOR	2 NO.-MS. VITREOUS ENAMELLED TYPE (OPTIONAL)
WIRE GUARD	2 NO.-MS.WHITE PAINTED
EARTHING SCREW	1 NO.-INTERNAL & 2NOS.-EXTERNAL
CABLE ENTRY	2 NOS.-1/2" OR 3/4"ET/BSC/NPT CABLE ENTRIES
PAINT	EPOXY LIGHT GREY SHADE-631 OF IS:5

Fixture used is Sudhir switchgear make cimr approved.

Specifications

Types	: FLAME PROOF TUBELIGHT FIXTURE
Input Voltage	: 6000-6500K
Typical Power Consum	: 1500 lim
Input Voltage	:150-270V AC
Operation Temp. Range	:0-50 Deg Centigrade
Typical Luminous Effic	: >90 lm/w
CRI	: >70
Beam Angle	: 120 Deg
Warranty	: 18 Months
Fixture IP	IP65 Protection

The LED Lamp Advantage :

- **More energy-efficient than halogen :** LED lamps, very efficacious in converting power into light, may achieve over 70% of power saving as compared with traditional halogen lamps.
- **Long Lifespan :** The averaged lifespan of LED lamps is at least 10 times that of halogen lamps, eliminating the need for frequant replacements.
- **Healthy Light :** Except particular applications such as tanning booths, Mosquito killers and so on, LED lamps for general lighting emit neither ultraviolet (UV) nor infrared (IR) that may health.
- **Environment Friendly :** LED lamps do not contain mercury, sodium, and other hazardous chemical elements, possibly necessary for certain traditional light sources and unfriendly to the ecological environment.
- **Low Power Consumption :** Under the condition of the same output light, LED lamps consume less input power than traditional lamps, reimbursing you by reducing power bill.
- **No Perceptible Flickering :** Traditional lamps driven by an AC current with a relatively low frequency may produce perceptible flickering that may lead to eye discomfort or injury while LED lamps driven by a DC current with a relatively high frequency will not.
- **High Luminous Efficacy :** The increasingly high luminous efficacy (lm/W) of LED lamps provides more light output (lm) with less power input (W), turning LED lamps into the mainstream in the lighting industry.

Features

- Indoor use
- Power factor > 0.9
- High power efficiency >85%
- High luminous efficacy LEDs
- No UV or IR radiation
- Cool light can reduce the rise of the ambient temperature
- Energy saving and environment friendly

Design specifications subject to change

NON FLAME PROOF HAND LAMP
IPS-MYD013 -15WNFP



Technical Specification

SAP CODE : 2001647997

TYPE	IPS-MYD013 -15W.
INPUT VOLTAGE	12VDC (Battery Operated)
BATTERY CAPACITY	6 Ah
DISCHARGE TIME	5-6 Hrs.
CHARGING TIME	8 – 10 Hrs.
TYPICAL POWER CONSUME	15W
LUMINIOUS LUX(lm)	1950 Lumen
OPERATING TEMPRATUTE RANGE	0 - 70 Degree Centigrade
TYPICAL LUMINIOUS EFFICIENCY	> 130 Lumen / W
CRI	> 80
CCT	6000K – 6500K
BEAM ANGLE	90 – 120 Degree
LED SOURCE	COB
HOUSING MATERIAL	Aluminum Alloy LM6 Construction.
LED LIFE AT NORMAL STANDARD WORKING CONDITION	500000Hrs.
IP RATING	IP66

Advantage:

More energy-efficient than halogen : LED lamps, very efficacious in converting power into light, may achieve over 70% of power saving as compared with traditional halogen lamps.

- Long Lifespan: The average lifespan of LED lamps is at least 10 times thatofhalogen lamps, eliminating the need for frequent replacements.
- Healthy Light: Except particular applications such as tanning booths, mosquito killers and so on, LED lamps for general lighting emit neither ultraviolet (UV) nor infrared (IR) that may harm health.
- Environment Friendly: LED lamps do notoontain mercury, sodium, and other hazardous chemist elements, possibly necessary for certain traditional light sources and unfriendly to the ecological environ
- Low Power Consumption: Under the condition of the same output light, LED lamps consume less input power than traditional lamps, reimbursing you by reducing power bill.
- No Perceptible Flickering : Traditional lamps driven by an AC current with relatively low frequency may produce perceptible flickering that may lead to eye discomfort or injury while LED lamps driven by DC current with a relatively high frequency will

Features

- Indoor use
- Power factor
- High power efficiency
- High luminous efficacies “No UV or IR radiation
- Cool light can reduce the rise of the ambient temperature
  Cool light can reduce the rise of the ambient temperature
- Cool light can reduce the rise of the ambient temperature
- Cool light can reduce the rise of the ambient temperature

Design specifications subject to change



Technical Specification

TYPE	IPS -FL -100W/150W/ 200W /250W/300W
INPUT VO LTAGE	100 - 265 V AC (Freq. 50 Hz) (P.F. > 0.96)
POWER CONSUMPTION	100W/150W/200 W /250W/300W
LIGHT SOURCE	S MD LED
LUMINIOUS FLUX	22000 Lumen (increasing by required wattage)
CCT	6000-6500 K (Coo l White)
LUMI NOUS EFFICI ENCY	1 10 Lumen/W@4000K
OPERATION TEMP .	Up to 50 Degree Ce ntigrade
CRI	> 80
BEAM ANGLE	90Deg/120Deg
PROTECTION	10K Surge Protection
DRIVER	Integral Driver
HOU SING MATER IAL	A luminu m alloy cas ting
IP RATING	IP 65
LED Working Life	50000Hrs

The LED Lamp Advantage:

Long Lifespan: The average lifespan of LED lamps is at least 10 times that of halogenlamps eliminating the need for frequent replacements.
Healthy Light: Except particular applications such as tanning booths, mosquito killers and so on, LED lamps for general lighting emit
Neither ultraviolet (UV) nor infrared (IR) that may harm health.
Environment Friendly: LED lamps do not contain mercury, sodium, and other hazardous chemical elements, possibly necessary for certain traditional light sources and unfriendly to the ecological environment.
Low Power Consumption:Under the condition of the same output light, LED lamps consume less input power than tradtional lamps, reimbursing you by reducing power bill.
No Perceptible Fickering: Traditional lamps driven by an AC current with a relatively low frequency may produce perceptible
Flickering that may lead to eye discomfort or injury while LED lamps driven by a DC current with a relatively high frequency will not.
High Luminous Efficacy: The increasingly high luminous efficacy (lm/W) of LED lamps provides more light output (m) with less power input (W), turning LED lamps into the mainstream in the lighting industry.
No UV in Light Spectrum Does not attract insects and keeps place clean.

Features

Indoor use/Outdoor use
Power factor >
High power efficiency > 85% High luminous efficacy LEDs
No UV or IR radiation
Cool light can reduce the rise of the ambient temperature
Energy saving and environment friendly

Design specifications subject to change

SOLAR STREET LIGHT (SOLAR + ELECTICITY)
IPS-SSL-20W



TECHNICAL SPECIFICATION

TYPE	IPS-SSL-20W (Solar + Electricity)
POWER CONSUMPTION	20W
LIGHT SOURCE	SMD LED
CCT	6000K 6500K
LUMINIOUS FLUX	2800 Lumen
LUMINIOUS EFFICIENCY	140 Lumen/Watt
CRI	>80Ra
BATTERY	12.8V 24Ah (EV Grade cell with 1500 life cycle)
SOLAR PANEL	75W
CHARGING TIME	7- 8 Hrs
OPERATING TIME	10/12 Hrs.
HOUSING MATERIAL	Aluminum Die Cast
IP RATING	IP65
DISCRIPTION: - Working on Solar & Electricity in Same Light Fixture, As The Battery get Discharged Lamp will Switch O ver to Electricity Automatically & Light Output Will be Same.	

Design specifications subject to change



TECHNICAL SPECIFICATION

TYPE	IPS-CLR-60W (MS)&(SS) TOP & BOTTOM OPENABLE
INPUT VOLTAGE	180V – 265V AC 0.9 PF
POWER CONSUMPTION	60W
TYPICAL LUMEN EFFICIENCY	110 LUMEN/W
LUMINIOUS LUX	6600 LUMEN
CRI	>80
DRIVER TYPE	ISOLATED CONSTANT CURRENT DRIVER IP65
PROTECTION	SPD 5K
DRIVER	INTEGRAL POWER MAKE/EQUIVALENT
LED MAKE	OSRAM
ACRYLIC SHEET	POLY CARBONATE 1.5MM NON YELLOWING
PCB THICKNESS	1.5MM
POWDER COATING	CRCA POWDER COATED FIXTURE
TOP FRAME	1MM THICKNESS EPOXY COATED
BODY THICKNESS	1MM
OUTER SIZE	600MM X 600MM PANNEL SIZE 595X595MM
INSTALLATION	MOUNTING BRACKET EASY STEADY INSTALLATION
LED LIFE	50000 HRS
IP RATING	IP33
WARRENTY	24MONTH

Design specifications subject to change

HAND LAMP E -27 24VAC 7W
IPS-HL-7W -24VAC



THIS FLAMEPROOF LEDHANDLAMP ISDESIGNED TO OPERATEON 24V AC POWER SUPPLY FOR USAGE IN AS WHERE AC SUPPLY IS NOT AVAILABLE.LAMP IS WITH 12 W OUTPUT WITH GOOD SPREAD UVER AREA. USES A HIGHLY RELIABLE AC/DC DRIVER HAS LONG LIFE OF 30000+BURNING HOURS. USES STANDARD CERTIFIED FLAME PROOF FIXTURE WITH TOUGHNED GLASS, SMD LED's WITH MC PCB

TECHNICA L SPECIFICATION

TYPE	IPS -HL -7W -24VAC
INPUT VOLTAGE	24VAC
CCT	6000-6500K (Cool White)
TYPICAL POWER CONSUME	7W
LUMINIOUS LUX(lm)	770Lumen
TYPICAL LUMINIOUS EFFICIENCY	> 110Lumen /W
CRI	> 80
BEAM ANGLE	120 dig
LED SOURCE	SMD LED
HOUSING	Aluminum DIE Cast LM6
GLASS	Toughen glass
SHAPE	Cylindrical
CABLE ENTRY	M20X1.5
LAMP HOLDER	E -27
LED LIFE AT NORMAL STANDARD WORKING CONDITION	500000Hrs.
IP RATING	IP66,Flame Proof
CERTIFICATES	PESO_WG_1238. CIMFR _WG_1238

The LED Lamp Advantage:

More energy-efficient than halogen: LED lamps, very efficacious in converting power into light, may achieve over 70% of power saving as compared with traditional halogen lamps.
Long Lifespan: The average lifespan of LED lamps is at least 10 times that of halogen lamps, eliminating the need for frequent replacements.
Healthy Light :Except particular applications such as tanning booths, mosquito killers and so on, LED lamps for general lighting emit neither ultraviolet (UV) nor infrared (IR) that may harm health.
Environment Friendly: LED lamps do not contain mercury, sodium, and other hazardous chemical elements, possibly necessary for certain traditional light sources and unfriendly to the ecological environment.
Low Power Consumption: Under the condition of the same output light, LED lamps consume less input power than traditional lamps, reimbursing you by reducing power bill.
No Perceptible Fl clearing :Traditional lamps driven by an AC current with a relatively low frequency may produce perceptible Flickering that may lead to eye discomfort or injury while LED lamps driven by a DC current with a relatively high frequency will not.
High Luminous Efficacy: The increasingly high luminous efficacy (lm/W) of LED lamps provides more light output with less power input (W), turning LED lamps into the mainstream in the lighting industry.

Features:

Indoor uses
High Power Efficiency
High Luminous Efficiency
No UV OR IR Radiation
Cool Light Can Reduce the Rise of Ambient Temperature.

Design specifications subject to change



SAP CODE -2001632127

This headlight has high light output of 800+ lumens even at 2mtr distance, uses CREE Q5 LED has two switch modes for selection of steady beam or flashing beam. This super high -bright head lamp is suitable for use as safety light with helmet and also outdoor activity etc.

Features:

- CREE Q5 LED, ultra - bright. 2 mode: High / Flash.
- Headlamp angle adjustable by 90 degree. Zoom In/ Out to adjust its Focus.
- Brightness adjustable with knob.

Specifications:

- LED type: CREE Q5 LED
- Lumen: 3watts... (Lux at 1mtr=3250lum, at 2mtr=800lum+) Light color: Cool White
- Switch: Knob with 3 positions (on - flashing - off)
- Power ..... 3.7v 6800mAh (Rechargeable batteries with charger optional)
- Weight: @100gms (excluding battery)

Design specifications subject to change









RELIABLE SOLUTIONS

- **Office :** AS B/57, Ashwin Nagar, Near MIDC Ambad, Nashik - 422 009. Maharashtra, INDIA
- **Works :** X-29, Near XLO Point, MIDC Ambad, Nashik-422010. Maharashtra, INDIA

Ph.: +91 253 6600309 E-mail : integralpowersol@gmail.com