

Two-Tire-Architecture

Firstly, I logged into the Azure portal, and created a resource group named two-tire-proj.

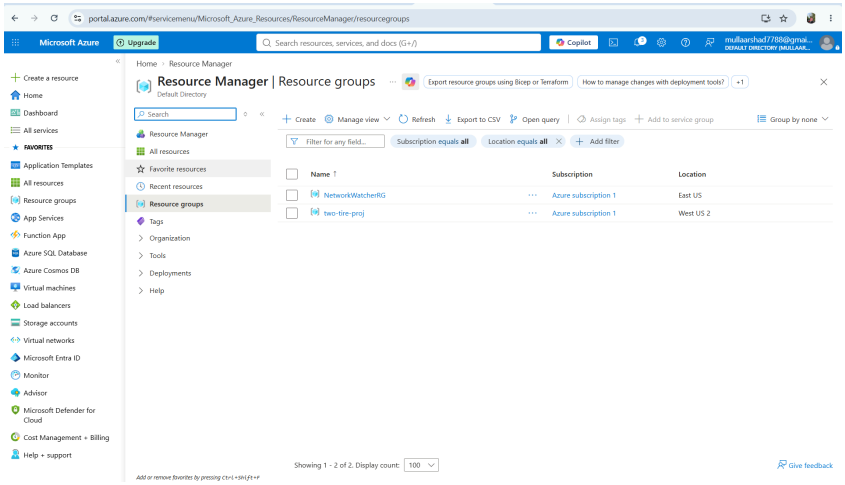

Then, I have created a virtual network (VNet) named as all-tire (VNet1) and created another Vnet as app (VNet2).

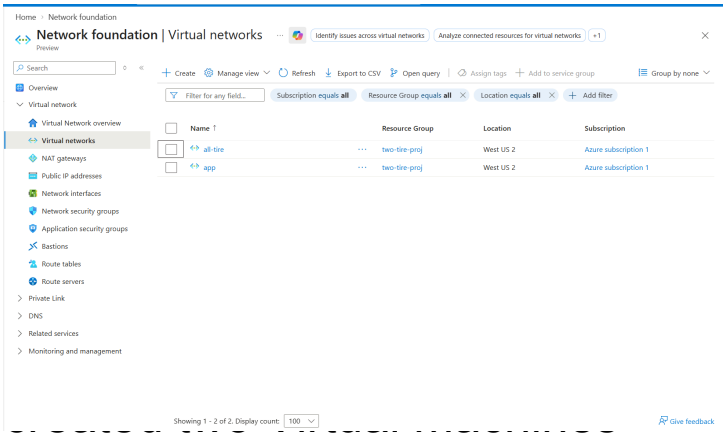


Later, i have

1.web-server

2.app-server

In those machines I have installed two nginx servers while creating it in advanced settings.

Also i have added ubuntu images.

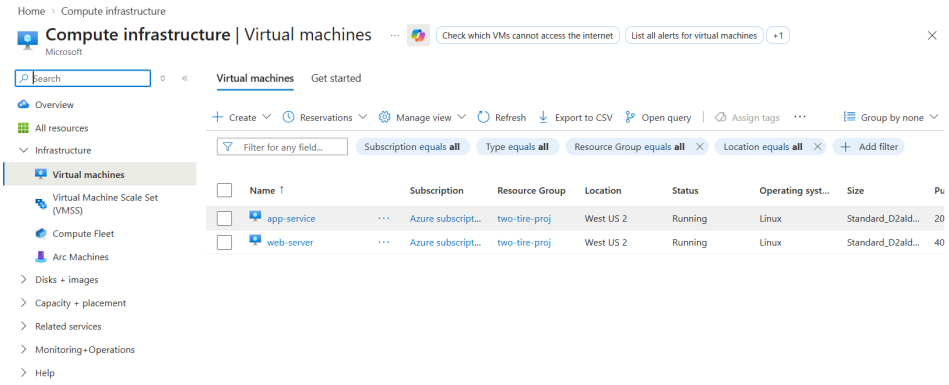


Now, fc




balancer (web-LB) and added Frontend IP configuration, Backend pools, Health probes and Load balancing rules. Then i got my Frontend IP address

example : 4.154.195.24 (web-ip)

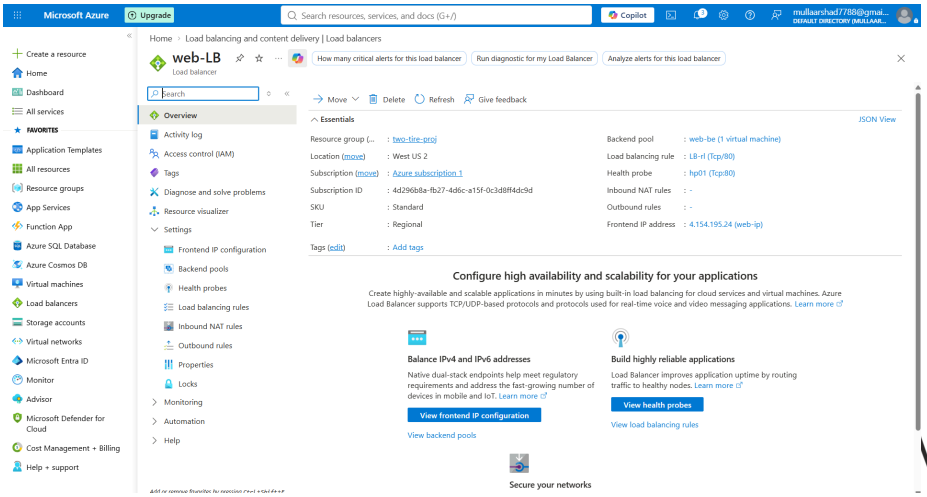

Later , I VM2 named as app-LB and associated Frontend IP

configuration, Backend pools, Health probes and Load balancing rules.
Then I got my Frontend IP address.
Example: 10.1.3.5 (private IP)

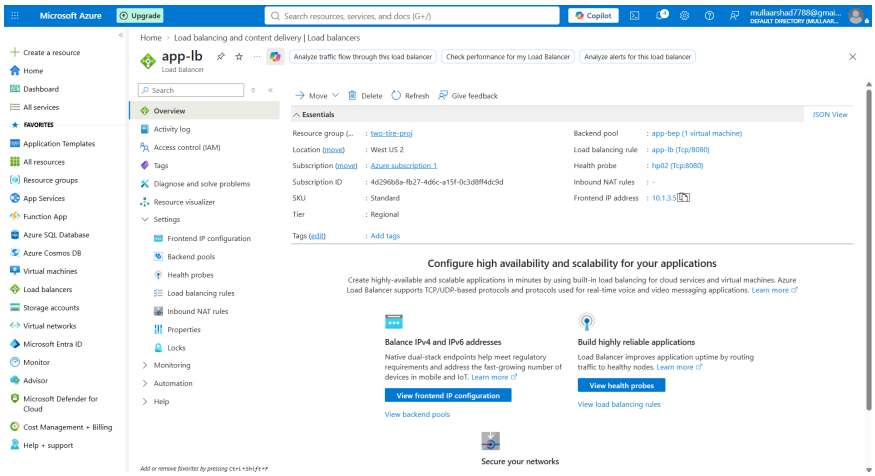


I have logged into the app-server in ubuntu and installed tomcat in it.


While writing the load balancing rule I wrote a rule to allow 8080 port for tomcat and 80 port for web-server.

Later, in the app-server (VM2) in the Network security group I added an inbound rule to allow 8080 port.

I have also created a peering connection for VNet1 to Vnet2 to establish internal communication between both servers.

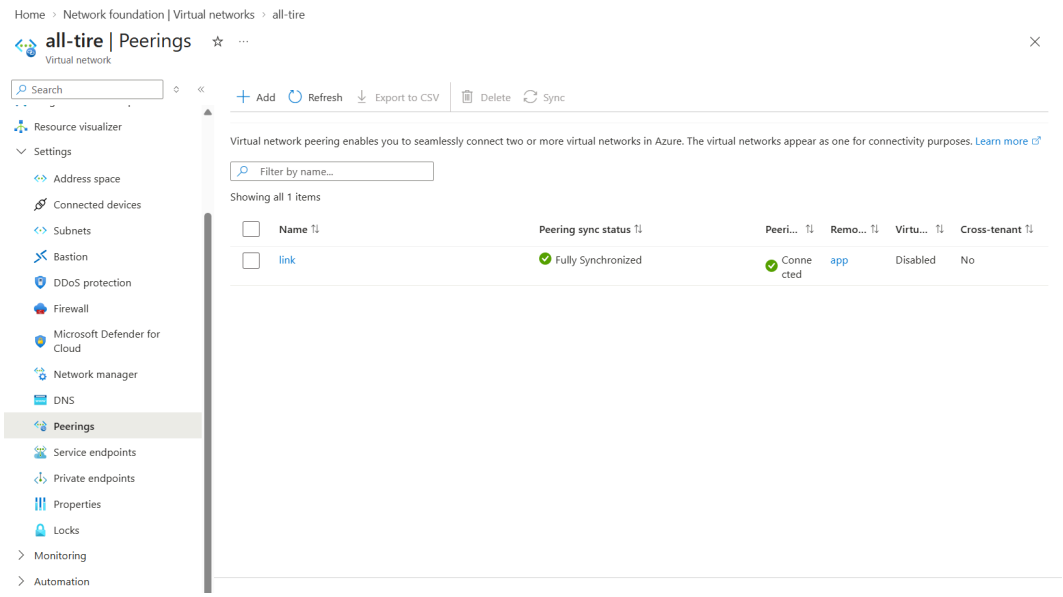

I have logged into VM1 web-server machine and tried the command telnet private ip of vm2 and I have successfully got connected status.
command : telnet 10.1.3.5 8080

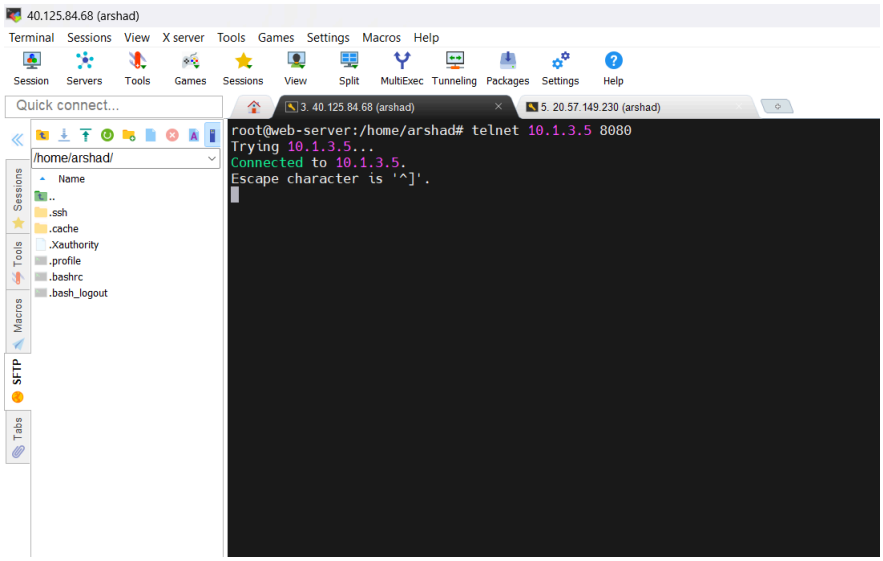

Successfully completed two-tire-Architecture

MULLA ARSHAD AALEM