

SMART EV CHARGING FOR SMART INDIA WITH INDIA'S LARGEST EV CHARGING NETWORK



3.3kW



7.4kW




30kW



60kW



Scan to
install
today!



3.3kW



Input Voltage (VAC)

230V, Single Phase

Connectivity

Wi-Fi (GSM optional)

Power Output

3.3 kW

User Interface

EZ CHARGE Mobile App

Connector Type

BIS Certified 3-Pin Socket

Mounting

Wall-mounted

Compliant With

Bharat AC-001

IP Rating

IP54

Protection

MCB, RCCB

Best Use Case

Villas | Individual Builder Units
Office | Industry

3.3kW



I/P Rating	Single Phase, 240V $\pm$ 10%, 50/60 Hz
O/P Rating	3.3 kW 16A Type 2 Charging Cable
Language	English
Push button	Yes
User Authentication	RFID/QR
Indications	12V RGB
Network Connectivity	WI-FI/ 4G
Charger & CMS	OCPP 1.6 J
Operating Temperature	-10° to 55° C
Storage Temperature	-40° to 80° C
Humidity	B/w 5% to 95%
Altitude	B/w 0 to 2000 m
Enclosure Protection	IP 54
Cooling Type	Natural
Dimension	310 x 220 x 90 mm
Weight	2 Kg
Compliance	ARAI AIS 138 Part 1 compliant
Protection	Over Voltage Under Voltage Over Current, Short Circuit Surge Protection Ground Fault Protection Residual Current Emergency Stop Button

7.4kW



Input Voltage (VAC)

230V, Single Phase

Connectivity

Wi-Fi, 4G

Power Output

7.4 kW

User Interface

Mobile App + RFID Card

Connector Type

Type 2 (Tethered Gun)

Mounting

Wall-Mounted

Compliant With

OCPP 1.6J

IP Rating

IP65

Protection

Overload | Surge | Short Circuit

Best Use Case

Societies | Guest Parkings |
Dealerships | Office | Industry

7.4kW



I/P Rating	Single Phase, 240V $\pm$ 10%, 50/60 Hz
O/P Rating	7.4 kW 32A Type 2 Charging Cable
Language	English
Push button	Yes
User Authentication	RFID/QR/OTP
Indications	12V RGB
Network Connectivity	WI-FI (default)
Charger & CMS	OCPP 1.6 J or above (optional)
Operating Temperature	-30° to 55° C
Storage Temperature	-40° to 70° C
Humidity	B/w 5% to 95%
Altitude	>2000 m
Enclosure Protection	IP 54
Cooling Type	Natural
Dimension	300 x 250 x 140 mm
Weight	12.5 Kg
Compliance	ARAI AIS 138 Part 1 compliant
Protection	Over Voltage Under Voltage Over Current, Short Circuit Surge Protection Ground Fault Protection Residual Current Emergency Stop Button

CCS-2
30kW
MODEL :
OEV30K-1DCCS



Input Voltage (VAC)

3-Ph 415V (+/- 10%)

Output Voltage (V)

150-1000V DC

Charger Interface

LAN / 3G/4G/5G (M2M) / WiFi

Display

7" TFT Color Touch Screen

Ingress Protection

IP55

**Charger and Vehicle
Communication**

Power Line Communication
(PLC)

User Authentication

RFID / Mobile App based
QR Code / VIN

Place of Installation

Indoor / Outdoor

User Authentication

RFID / Mobile App based
QR Code / VIN

CCS-2 30kW



Input Voltage (VAC)	3-Ph 415V (+/-10%)
Efficiency (%)	>= 95%
Input Frequency (Hz)	50 Hz (+/- 3%) as per IS12360
Input Current (AC)	<50 A
Wires	5 wire (L1,L2,L3, N,PE)
Standby Power	<30W
Power Factor	>0.98
Current THD	<=5% (50% to 100%) as per IEC 61000-3-12
Number of Outputs	1
Output Connector type	IEC 62196-3 (CCS-2)
Output Voltage (V)	150-1000V DC
Max. Output Current (DC)	Max. 100A
Max. Output Power Rating (kW)	Max. 30KW DC
Display	7" TFT Color Touch Screen
Electrical metering	1% Accuracy (comply with IEC 62052-11 & IC 62053-21)
Emergency Push Button	Provided
User Authentication	ISO 14443 RFID / Mobile App based QR Code/ VIN
Visual Status Indication	LCD and LED for Mains available, Charging status, System error
Charging Mode	IEC 61851-1 (Mode-4)
Charger and Vehicle Communication	Power Line Communication (PLC)
Charger and CMS communication	Open Charge Point Protocol 1.6J
Compliance	IS17017-1/ IEC61851-1
Charger Interface	LAN / 3G/4G/5G (M2M) / WiFi
Remote Firmware Update	FOTA
Protections	Input Over Voltage, Input Under Voltage, Input Short Circuit, Input over Current, Connection Abnormality, Emergency Stop, Surge Protection upto 4KV, Residual Leakage Current-30mA, Ground Fault, Earth Presence Monitoring, Output Over Current, Over Temperature (Derating/Shutdown), Insulation Resistance Monitoring, Reverse Battery Connection.
EMI/EMC	Immunity to Electro Static Discharge (IEC 61000-4-2), Voltage Dips and Interruptions (IEC 61000-4-11), Electric Fast Transient (IC 61000-4-4), Voltage Surge (IC 61000-4-5), Radiated Emission, Conducted Emission, Radiated Immunity, Conducted Immunity.
Ambient Temperature	-20° to +55° C (derating above +55°C)
Relative Humidity	<95%, non-condensing
Place of installation	Indoor / Outdoor
Ingress Protection	IP55
Enclosure Protection	IK10
Cooling	Forced Air Convection
Charging wire length	5 Mtr
Payment systems	Billing & transaction with various modes of payment
Memory Storage	To store 50 event logs. To store last 50 charging session information
Application	4W, Buses
Battery back-up	1 Hour
Max. dimension (W X D X H) mm	700 x 295 x 625
Max. Weight (KGS)	70KG (Approx)
Installation Type	Wall/Pole mounting

CCS-2
60kW
MODEL :
OEV60K-2DCCS-LSC



Input Voltage (VAC)

3-Ph 415V (+/- 10%)

Output Voltage (V)

150-1000V DC

Charger Interface

LAN / 3G/4G/5G (M2M) / WiFi

Display

7" TFT Color Touch Screen

Ingress Protection

IP55

Max. Output Power Rating (kW)

60 kW DC

User Authentication

RFID / Mobile App based
QR Code / VIN

Place of Installation

Indoor / Outdoor

Charger and Vehicle Communication

Power Line Communication
(PLC)

CCS-2 60kW



Input Voltage (VAC)	3-Ph 415V (+/-10%)
Efficiency (%)	>= 95%
Input Frequency (Hz)	50 Hz (+/- 3%) as per IS12360
Input Current (AC)	<100 A
Wires	5 wire (L1,L2,L3, N,PE)
Standby Power	<40W
Power Factor	>0.98
Current THD	<=5% (50% to 100%) as per IEC 61000-3-12
Number of Outputs	2
Output Connector type	IEC 62196-3 (CCS-2)
Output Voltage (V)	150-1000V DC
Max. Output Current (DC)	Max. 200A DC
Max. Output Power Rating (kW)	60KW DC (30KW/Gun)
Output Load Sharing	Yes It will deliver 100% power to one gun when only one gun is in use. The charger will share the power in both guns when both guns are in use.
Display	7" TFT Color Touch Screen
Electrical metering	1% Accuracy (comply with IEC 62052-11 & IC 62053-21)
Emergency Push Button	Provided
User Authentication	ISO 14443 RFID / Mobile App based QR Code/ VIN
Visual Status Indication	LCD and LED for Mains available, Charging status, System error
Charging Mode	IEC 61851-1 (Mode-4)
Charger and Vehicle Communication	Power Line Communication (PLC)
Charger and CMS communication	Open Charge Point Protocol 1.6J
Compliance	IS17017-1/ IEC61851-1
Charger Interface	LAN / 3G/4G/5G (M2M) / WiFi
Remote Firmware Update	FOTA
Protections	Input Over Voltage, Input Under Voltage, Input Short Circuit, Input over Current, Connection Abnormality, Emergency Stop, Surge Protection upto 4KV, Residual Leakage Current-30mA, Ground Fault, Earth Presence Monitoring, Output Over Current, Over Temperature (Derating/Shutdown), Insulation Resistance Monitoring, Reverse Battery Connection.
EMI/EMC	Immunity to Electro Static Discharge (IEC 61000-4-2), Voltage Dips and Interruptions (IEC 61000-4-11), Electric Fast Transient (IC 61000-4-4), Voltage Surge (IC 61000-4-5), Radiated Emission, Conducted Emission, Radiated Immunity, Conducted Immunity.
Ambient Temperature	-20° to +55° C (derating above +55°C)
Relative Humidity	<95%, non-condensing
Place of installation	Indoor / Outdoor
Ingress Protection	IP55
Enclosure Protection	IK10
Cooling	Forced Air Convection
Charging wire length	5 Mtr
Payment systems	Billing & transaction with various modes of payment
Memory Storage	TTo store 50 event logs. To store last 50 charging session information
Application	4W, Buses
Battery back-up	1 Hour
Max. dimension (W X D X H) mm	700 x 425 x 1525
Max. Weight (KGS)	210KG (Approx)
Installation Type	Floor mounting

India's No. 1 Choice for EV Charging Solutions



Plug & Earn

Turn every parking slot into a future-proof asset




Reliable Service

Tata Power's 24x7 tech & network support



Compact Installation:

Quick setup with minimal space



Dual Control

Operate via EZ CHARGE App or RFID-Enabled EZ CHARGE Card



TATA POWER EZ CHARGE App

Monitor Usage | Track Energy



Pan India Support

5500+ Charging Points |
550+ Cities |
3L+ Users

Built for Businesses. Ready for every Space



Builder Projects

(Residential/Commercial)



Housing Societies & RWAs



Dealership Chains

(OEMs)



Corporate Offices



Hotels and Hospitality Chains



Commercial & Industrial (C&I) Customers

Key Partnerships

AUTOMAKERS

TATA MOTORS
Connecting Aspirations



HOTELS



VIVANTA

GINGER




BUILDER & DEVELOPERS



Rustomjee



Scan to install today!

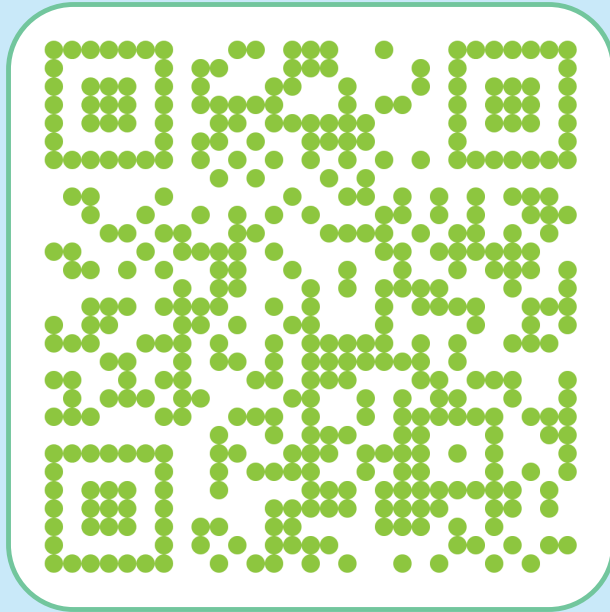

TATA POWER

EZ CHARGE

THE FUTURE IS HERE

For Installations & Sales Enquiries



1800-833-2233



evcharging@tatapower.com