


FRONT VIEW (record side)

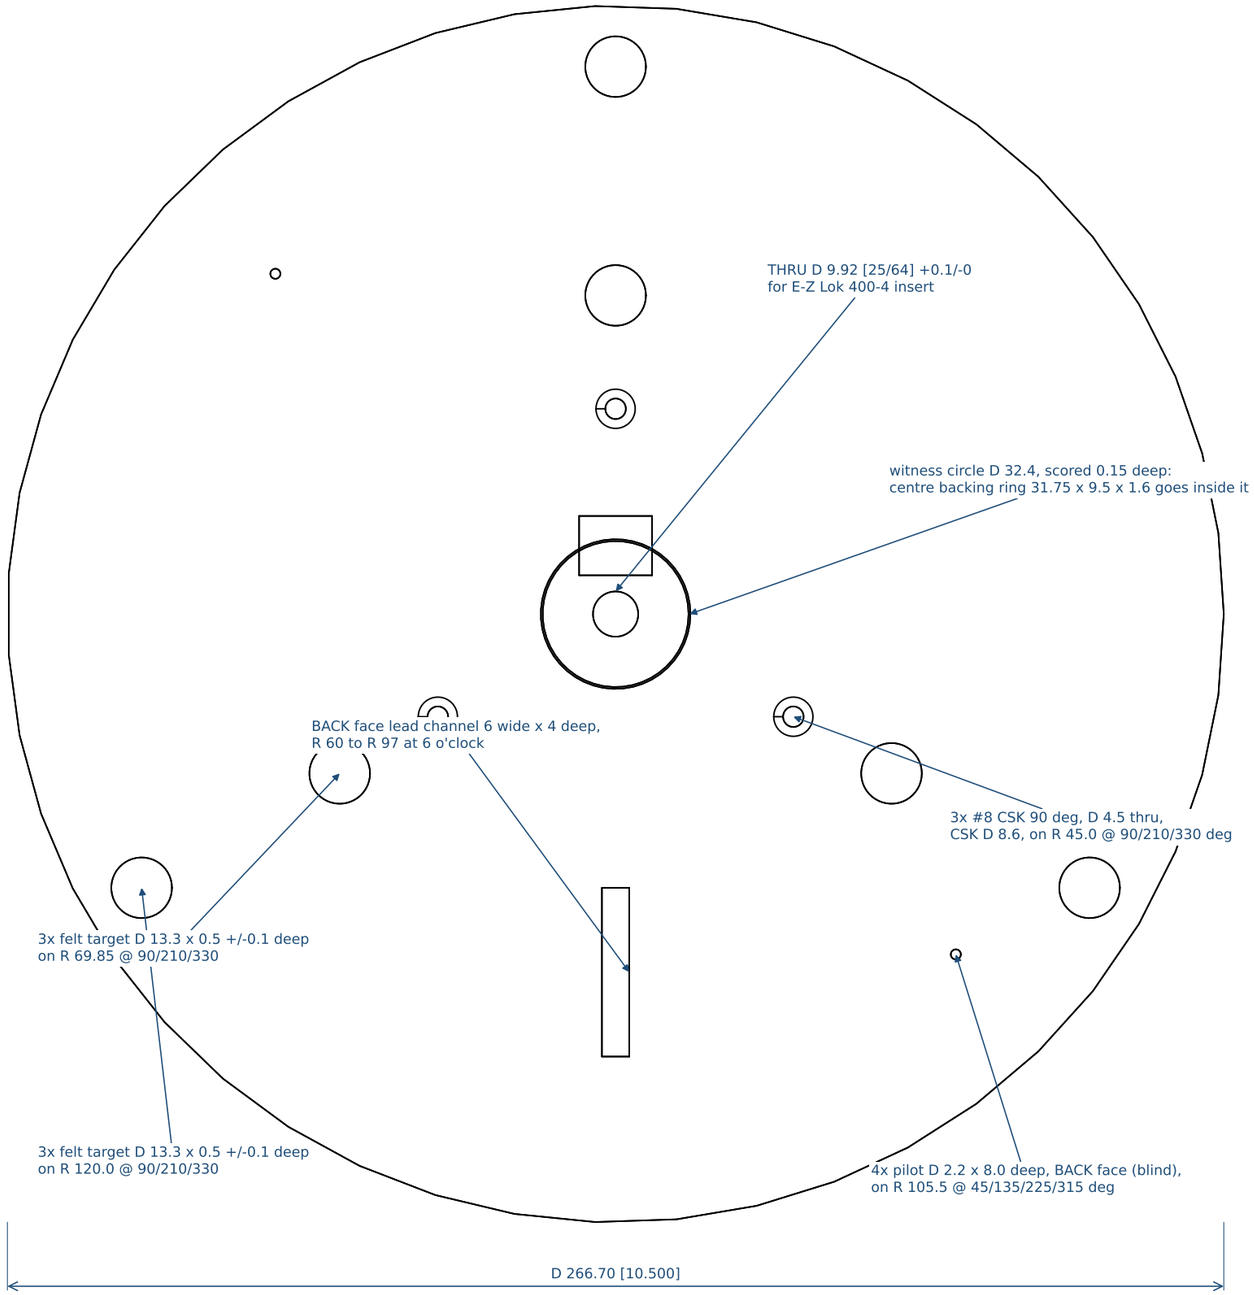

SECTION A-A (x=0): plain rim, no rabbet (rev C)

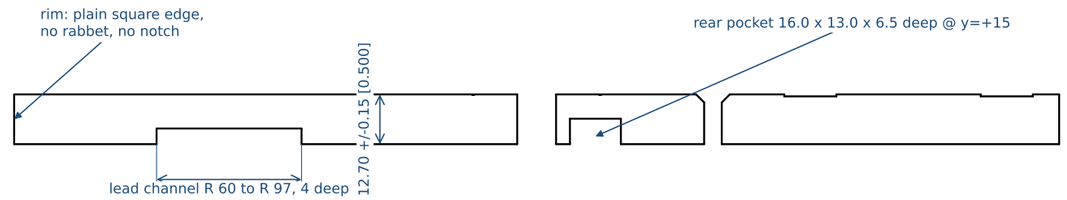

DETAIL B-B: radial cut through a heat-ring pilot (45 deg), back face down

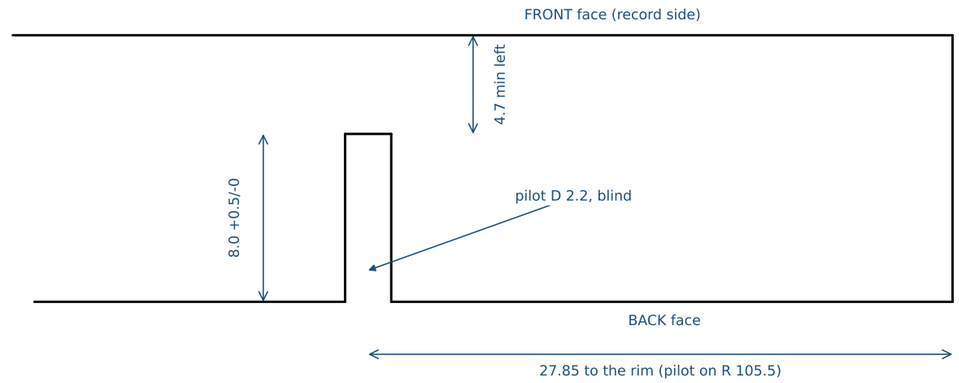

NOTES:

1. E-Z Lok 400-4 brass insert, 1/4-20, in the 25/64 in bore (CA glue in the bore only): driven flush to 0.2 BELOW the FRONT face, never proud (the centre backing ring lies over it). Wipe the insert's BACK end clean: it is an electrical contact on the lit sconce.
2. CENTRE BACKING RING: 31.75 OD x 9.5 ID x 1.6 adhesive felt (same blank as the cap felt) bonded on the FRONT face concentric with the bore, inside the scored witness circle D 32.4 (0.4 wide x 0.15 deep). It backs the record directly behind the cap so the clamp cannot dish it.
3. 6x felt pad targets D 13.3 x 0.5 deep for 1/2 in x 1/16 in felt pads. Pads sit IN the targets: record seat plane = 1.1 above the front face, coplanar with the loaded centre ring.
4. REV C (2026-11-11): NO rim rabbet and NO rim notch. The rim is a plain square edge, full thickness. The LED strip is no longer on this part: it rides on the aluminium ring RS-HR-12 over the cork ring RS-CK-12, which screw to the BACK face (heat-safe layout, see RS-ASM-12-MDF).
5. 3x #8 flat-head countersinks on the FRONT face (hidden by the record) fasten the hub from the front.
6. BACK face: 4x pilot D 2.2 x 8.0 +0.5/-0 deep on R 105.5 at 45/135/225/315 deg for the #4 x 3/8 heat-ring screws. BLIND: 4.7 of MDF must stay in front of each pilot, no mark on the front face.
7. BACK face: pocket 16 x 13 x 6.5 at y=+15 over the hub's splice cavity; lead channel 6 wide x 4 deep at 6 o'clock from R 60 to R 97 ONLY (it stops 3 short of the cork ring, ID R 100).
8. Break all edges 0.5 max. Flatness 0.3 over the full front face (the record lies on it) and over the back face band R 100 to R 130 (the cork ring lies on it). No tear-out on the front face or rim.

RECORD SCONCE | BACKPLATE 10.5 in, CNC MDF

PART NO: RS-BP-12-MDF REV: C DATE: 2026-11-11 SUPERSEDES: rev A, B (rim rabbet + rim notch; do not cut) (do not build or quote)

MATERIAL: 1/2 in MDF, thickness 12.70 +/-0.15 MEASURED (reject sheet outside it; nominal 1/2 in Baltic birch is 12.0 and is NOT acceptable), both faces flat

FINISH: Matte black, 2 coats, ALL surfaces including the rim edge (sealed MDF)

UNITS: mm [in] THIRD-ANGLE PROJECTION SCALE: as shown (not to print scale)

GENERAL TOLERANCES: x.x +/-0.3 x.xx +/-0.1 angles +/-0.5 deg unless noted