SECTION THROUGH THE AXIS

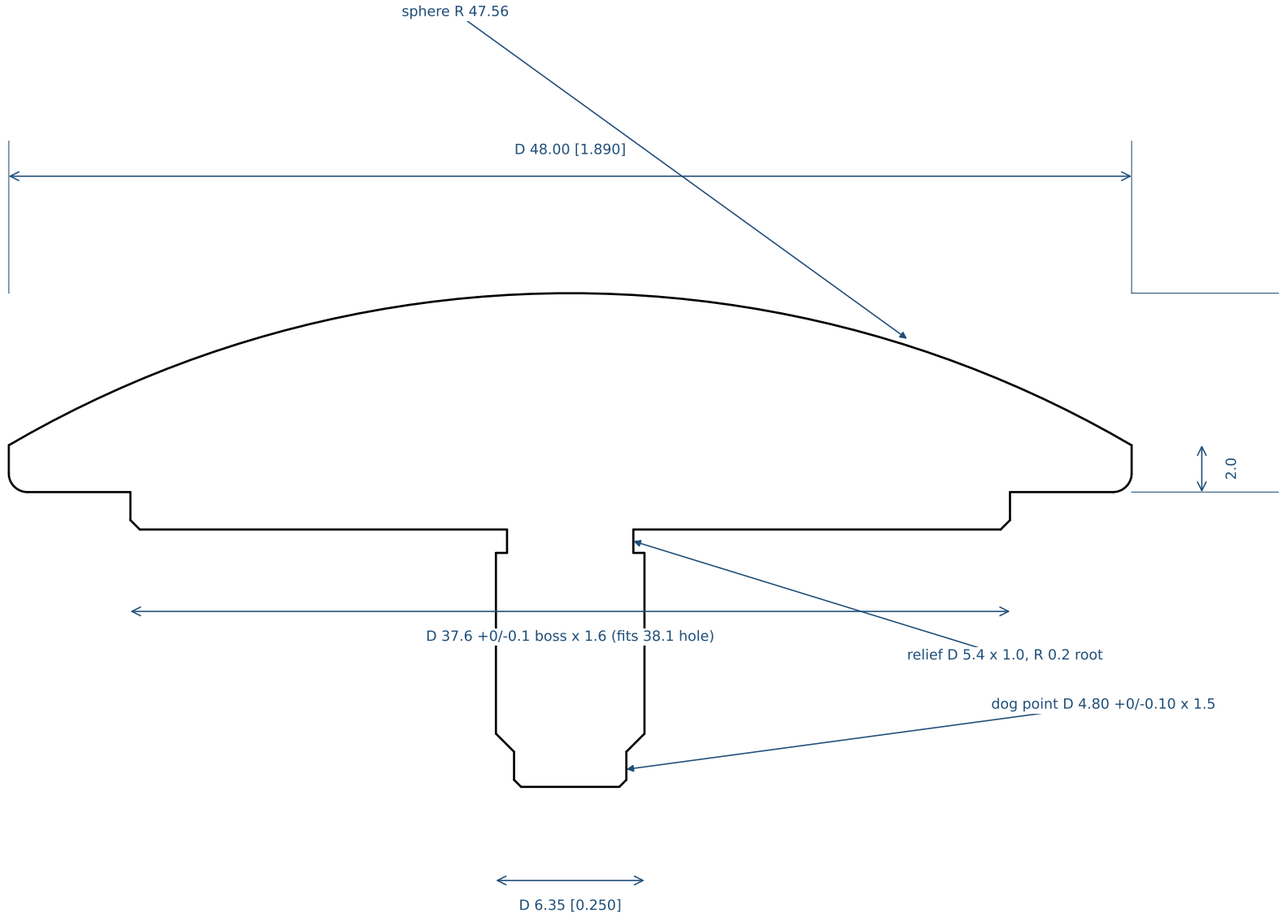

TOP VIEW

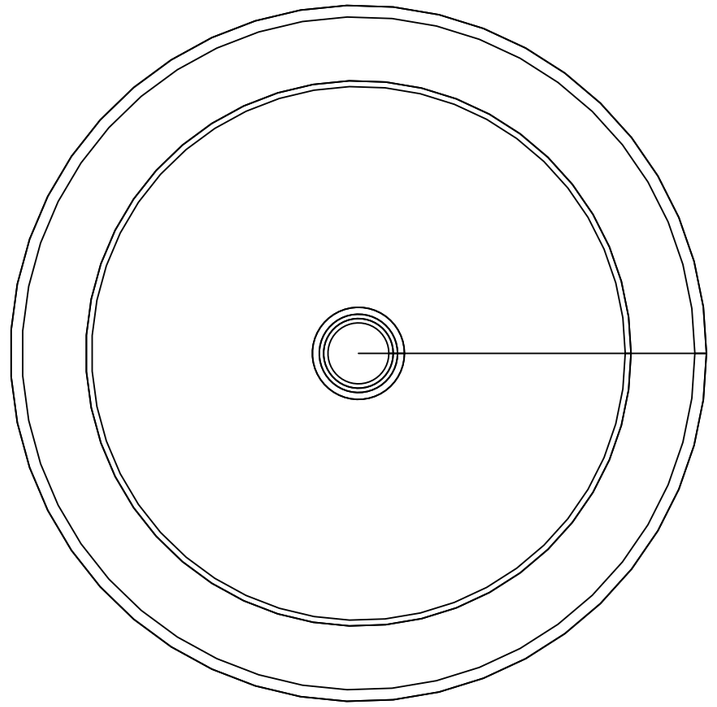

NOTES:

1. Dome is a sphere segment, R 47.56, height 6.5 above a 2.0 straight band; base edge R 0.8. NO knurl, no tool marks on the dome.
2. Thread 1/4-20 UNC-2A (class BEFORE plating), full form from the run-in to the relief groove D 5.4 x 1.0 (R 0.2 at the groove root). TIP: unthreaded dog point D 4.80 +0/-0.10 x 1.5 long (must enter the insert's 4.98 MIN minor dia), 0.3 x 45 chamfer, 45 deg run-in to the thread.
3. Stud length 12.60 +/-0.05 from the band (underside) face to the tip. Stud axis to dome axis concentric within 0.05. Underside face flat and square to the stud within 0.05.
4. Underside boss D 37.6 +0/-0.1 x 1.6 centres the cap in the 38.1 mm 45-rpm hole (replaces the plastic adapter).
5. Plating: rack on the STUD only. MASK the thread (do NOT chase after plating: chrome flakes). Any nickel on the thread 5 um max; the thread must accept a 1/4-20 2B GO gauge AFTER plating. Dome and band are Class A: inspect under daylight at 300 mm, zero pits/haze.
6. We fit: felt ring 47.0 x 39.0 x 1.6 and a clear PET ring 47.5 x 38.6 x 0.25. REV C (2026-11-11): stud 12.6 (rev B 15.88) so its tip lands exactly where the RS-CAP-12 tip lands; a rev B cap over-drives the lit sconce's centre contact.
7. Finish variants share the same part number with suffix -CR (chrome), -BR (brass), -BK (black).

RECORD SCONCE | DOME CAP 48 mm, 7 in record (45 adapter form)

PART NO: RS-CAP-7 REV: C DATE: 2026-11-11 SUPERSEDES: rev A, B (do not build or quote)
MATERIAL: Brass C360 (CDA 360) bar, turned in ONE piece with the 1/4-20 stud. No separate or bonded stud.
FINISH: CHROME: polish to mirror (Ra <= 0.1 um) then copper + bright nickel + decorative chrome per ASTM B456 SC2 (or PVD chrome over bright nickel). BRASS: polish + clear lacquer or brushed + lacquer. BLACK: black chrome over bright nickel, or PVD black (TiC/DLC), or black nickel + lacquer
UNITS: mm [in] THIRD-ANGLE PROJECTION SCALE: as shown
GENERAL TOLERANCES: x.x +/-0.3 x.xx +/-0.1 angles +/-0.5 deg unless noted