

SECTION x=0, cap + backplate + hub centre (world z, mm)

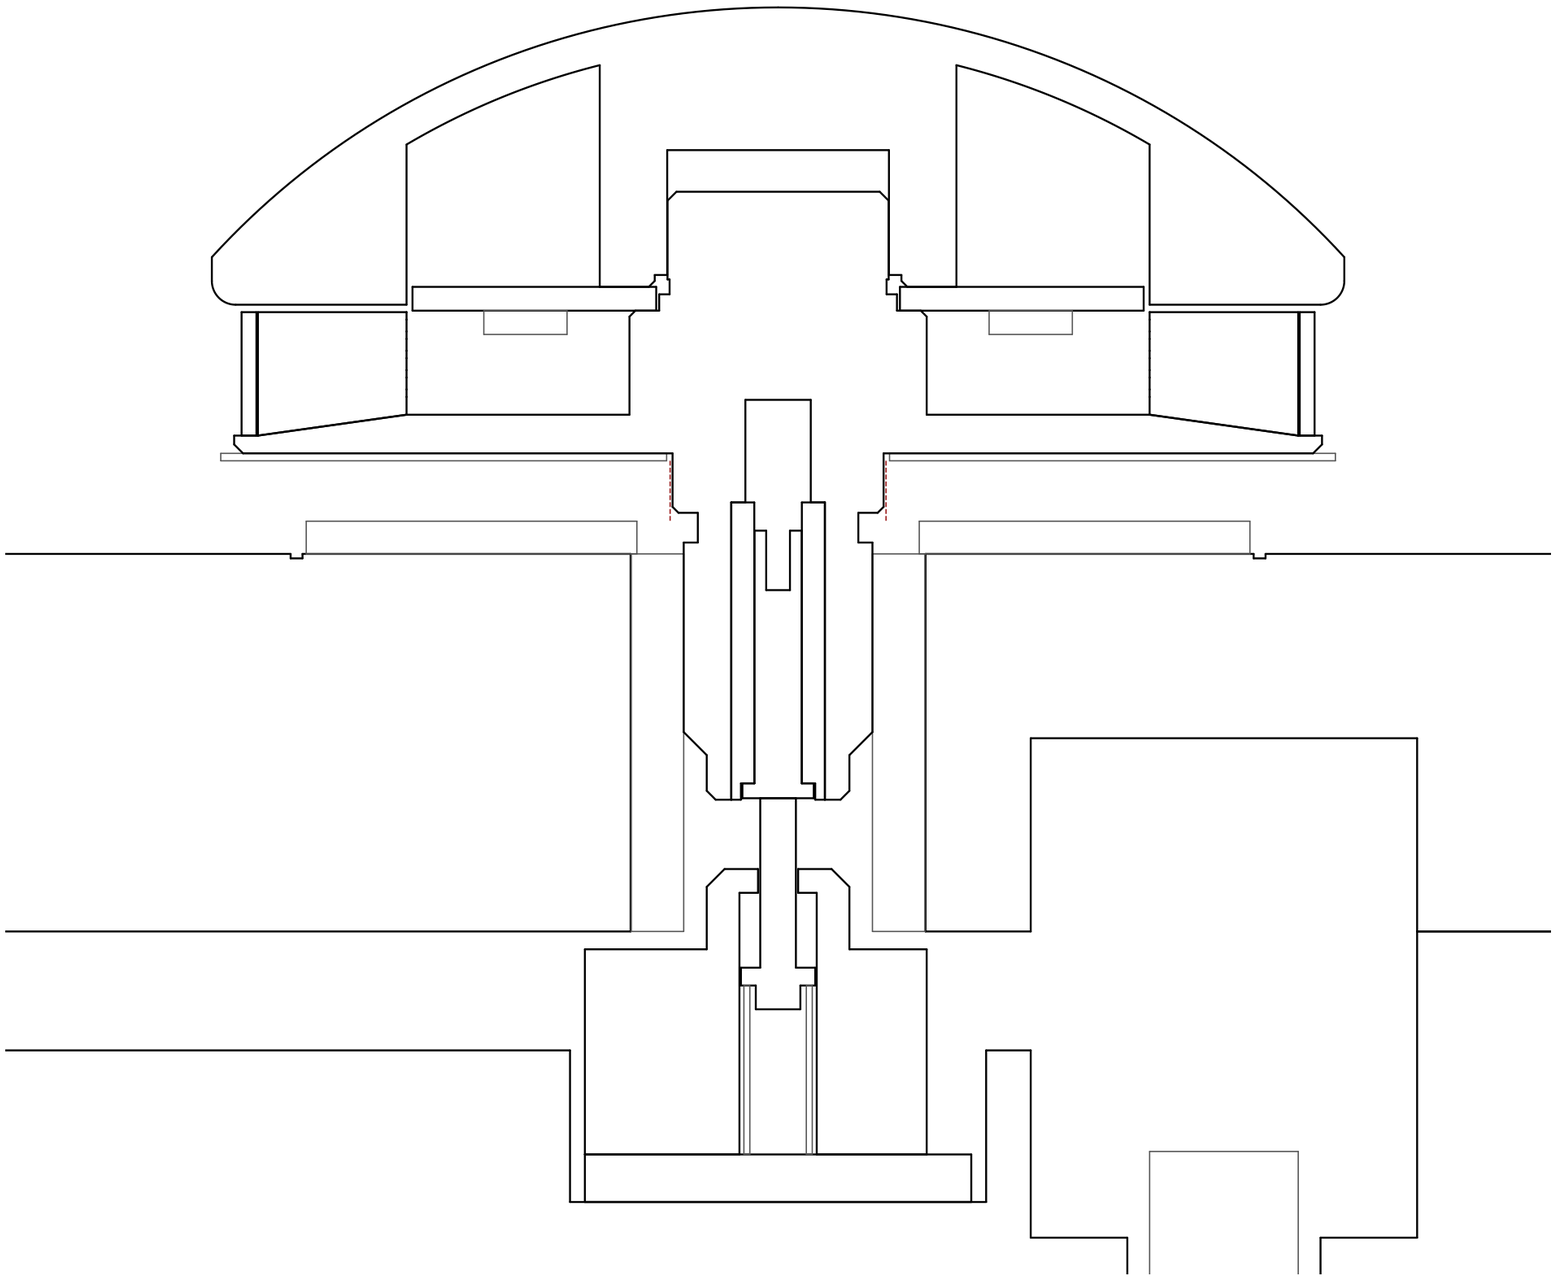

HALO DETAIL, top edge, section x=0 (same on plain and lit)

Record overhangs the backplate 19.05. The strip is 14.35 inside the rim, on the far side of the wood: no line of sight to the record. 4x #4 x 3/8 screws on R 105.5 at 45/135/225/315 deg are not in this cut.

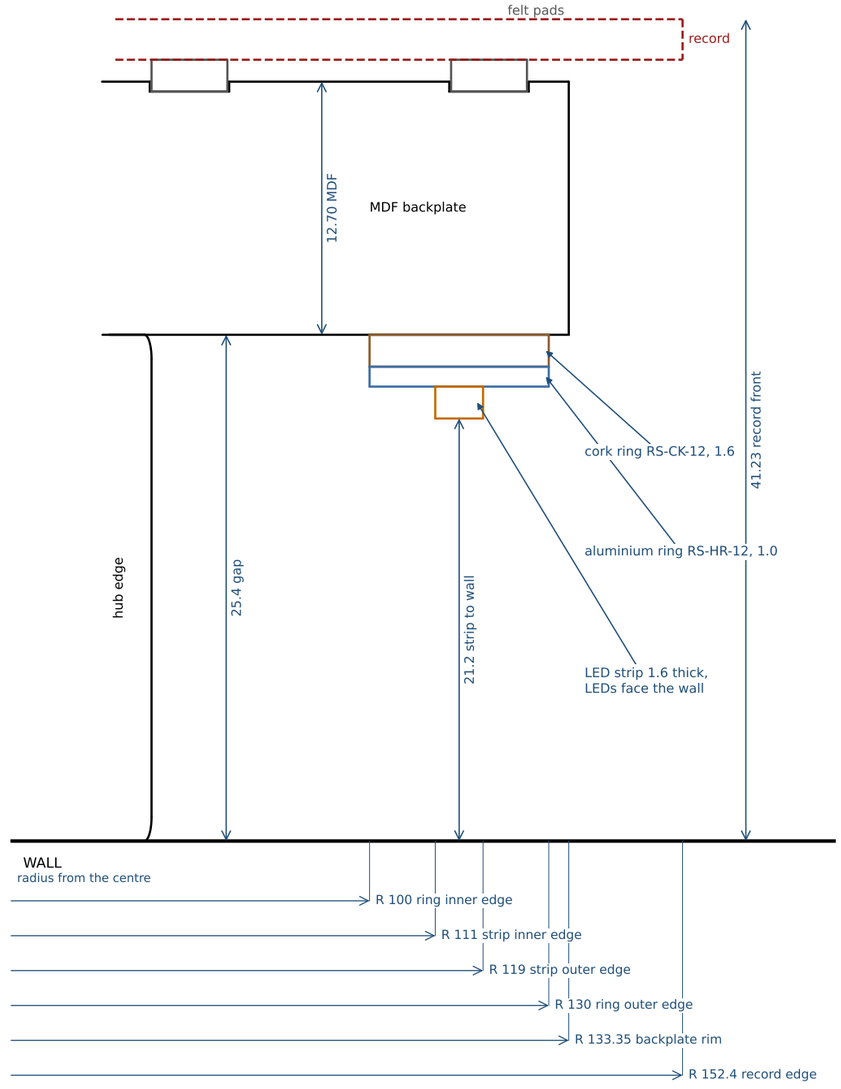

NOTES:

1. Section x=0, world frame (wall at z=0). Black = custom, grey = purchased, red dashed = customer record.
2. Clamp: flat core flange - PET label washer - record - centre backing ring (felt) - backplate, in one straight line. The record also rests on 6 felt pads, coplanar with the ring.
3. +12 V: hub CCR -> spring -> gold plunger in the PEEK guard tube -> headed gold pin at the stud tip -> PTFE lead up the bore -> LED PCB.
4. Return: LED PCB (both faces) -> column + dome boss -> brass core -> 1/4-20 thread -> E-Z Lok insert -> return spring pin on the insert's back end -> hub PCB.
5. Light: 6 LEDs face DOWN into a white cavity; it leaks out only through the 5-channel louver and the satin window, under the chrome lip, and grazes the label.
6. Stack numbers, contact travel and the full tolerance stack: checks.md, section 'Label light'.
7. HALO (right-hand view): identical to the plain-cap sconce RS-ASM-12-MDF. 8 mm strip on the BACK of the backplate facing the wall, on the 1.0 aluminium ring RS-HR-12 over the 1.6 cork ring RS-CK-12, strip centred on R 115, 4x #4 x 3/8 screws on R 105.5. No strip on the rim.
8. From the wall, measured on this assembly: backplate back 25.40, record front 41.23, lit cap tip 56.62 (furthest point).

RECORD SCONCE | LABEL-LIGHT STACK, section through the spindle axis

PART NO: RS-ASM-12L REV: B.1 DATE: 2026-11-11 SUPERSEDES: rev A, A.1, B (B showed the LED strip on the rim) (do not build or quote)

MATERIAL: see label-light/DESIGN.md parts list

FINISH: n/a

UNITS: mm [in] THIRD-ANGLE PROJECTION SCALE: as shown

GENERAL TOLERANCES: x.x +/-0.3 x.xx +/-0.1 angles +/-0.5 deg unless noted