
SECTION x=0, cap + backplate + hub centre (world z, mm)

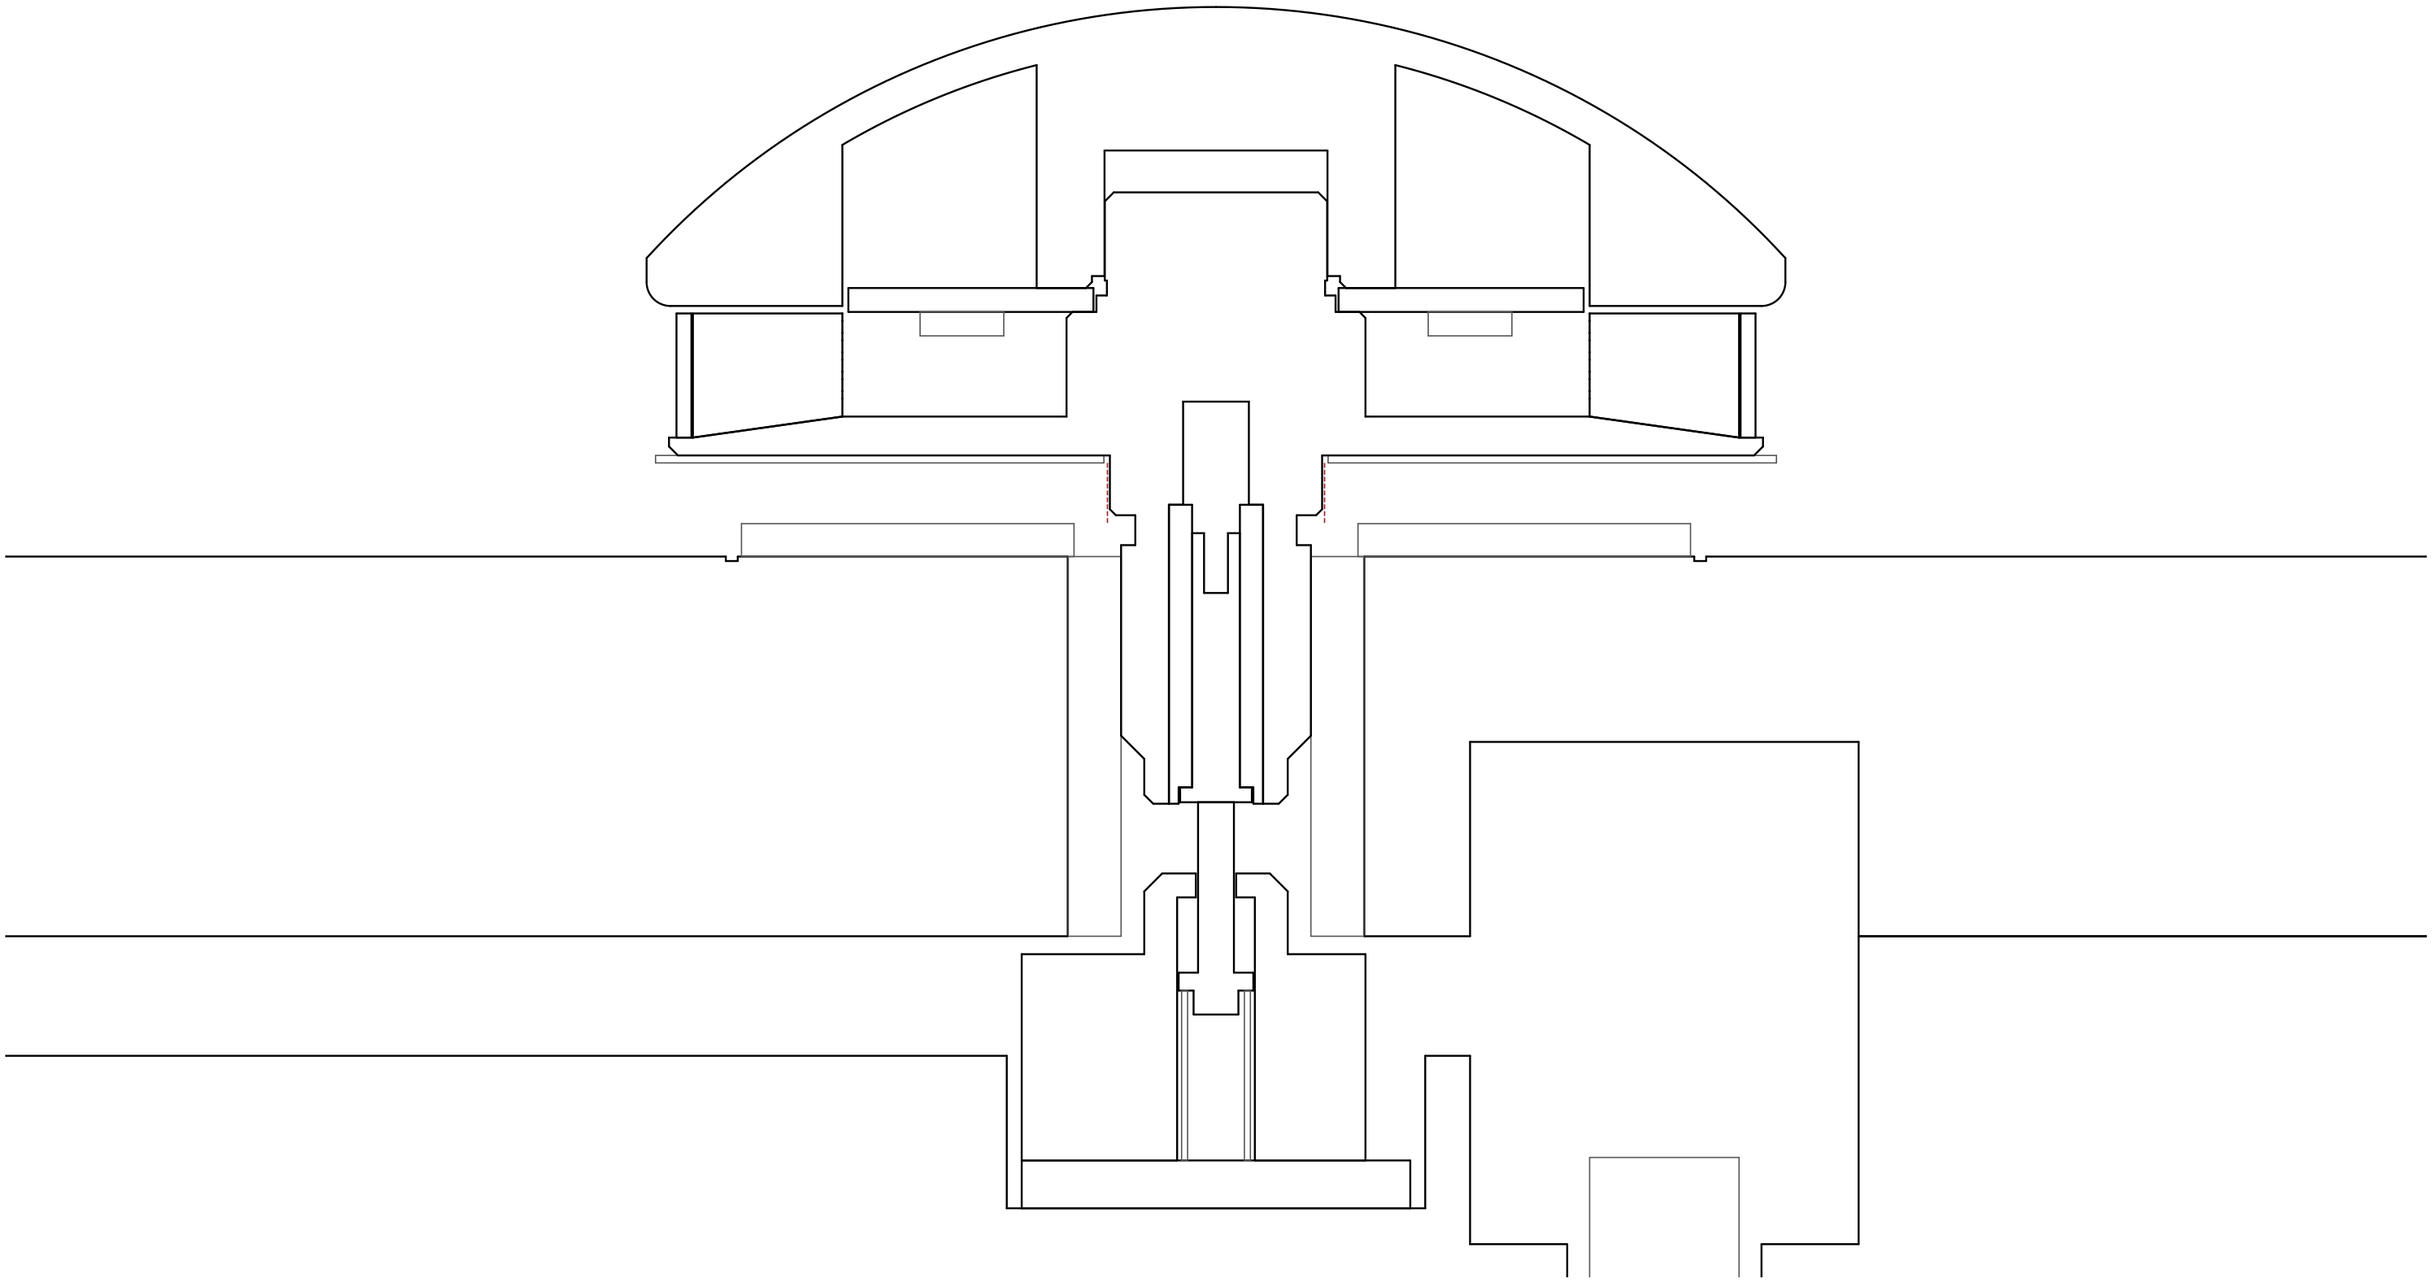

NOTES:

1. Section x=0, world frame (wall at z=0). Black = custom, grey = purchased, red dashed = customer record.
2. Clamp: flat core flange - PET label washer - record - centre backing ring (felt) - backplate, in one straight line. The record also rests on 6 felt pads, coplanar with the ring.
3. +12 V: hub CCR -> spring -> gold plunger in the PEEK guard tube -> headed gold pin at the stud tip -> PTFE lead up the bore -> LED PCB.
4. Return: LED PCB (both faces) -> column + dome boss -> brass core -> 1/4-20 thread -> E-Z Lok insert -> return spring pin on the insert's back end -> hub PCB.
5. Light: 6 LEDs face DOWN into a white cavity; it leaks out only through the 5-channel louver and the satin window, under the chrome lip, and grazes the label.
6. Stack numbers, contact travel and the full tolerance stack: checks.md, section 'Label light'.

RECORD SCONCE | LABEL-LIGHT STACK, section through the spindle axis

PART NO: RS-ASM-12L REV: B DATE: 2026-11-11 SUPERSEDES: rev A, A.1 (do not build or quote)
MATERIAL: see label-light/DESIGN.md parts list
FINISH: n/a
UNITS: mm [in] THIRD-ANGLE PROJECTION SCALE: as shown
GENERAL TOLERANCES: x.x +/-0.3 x.xx +/-0.1 angles +/-0.5 deg unless noted