


FRONT VIEW (record side)

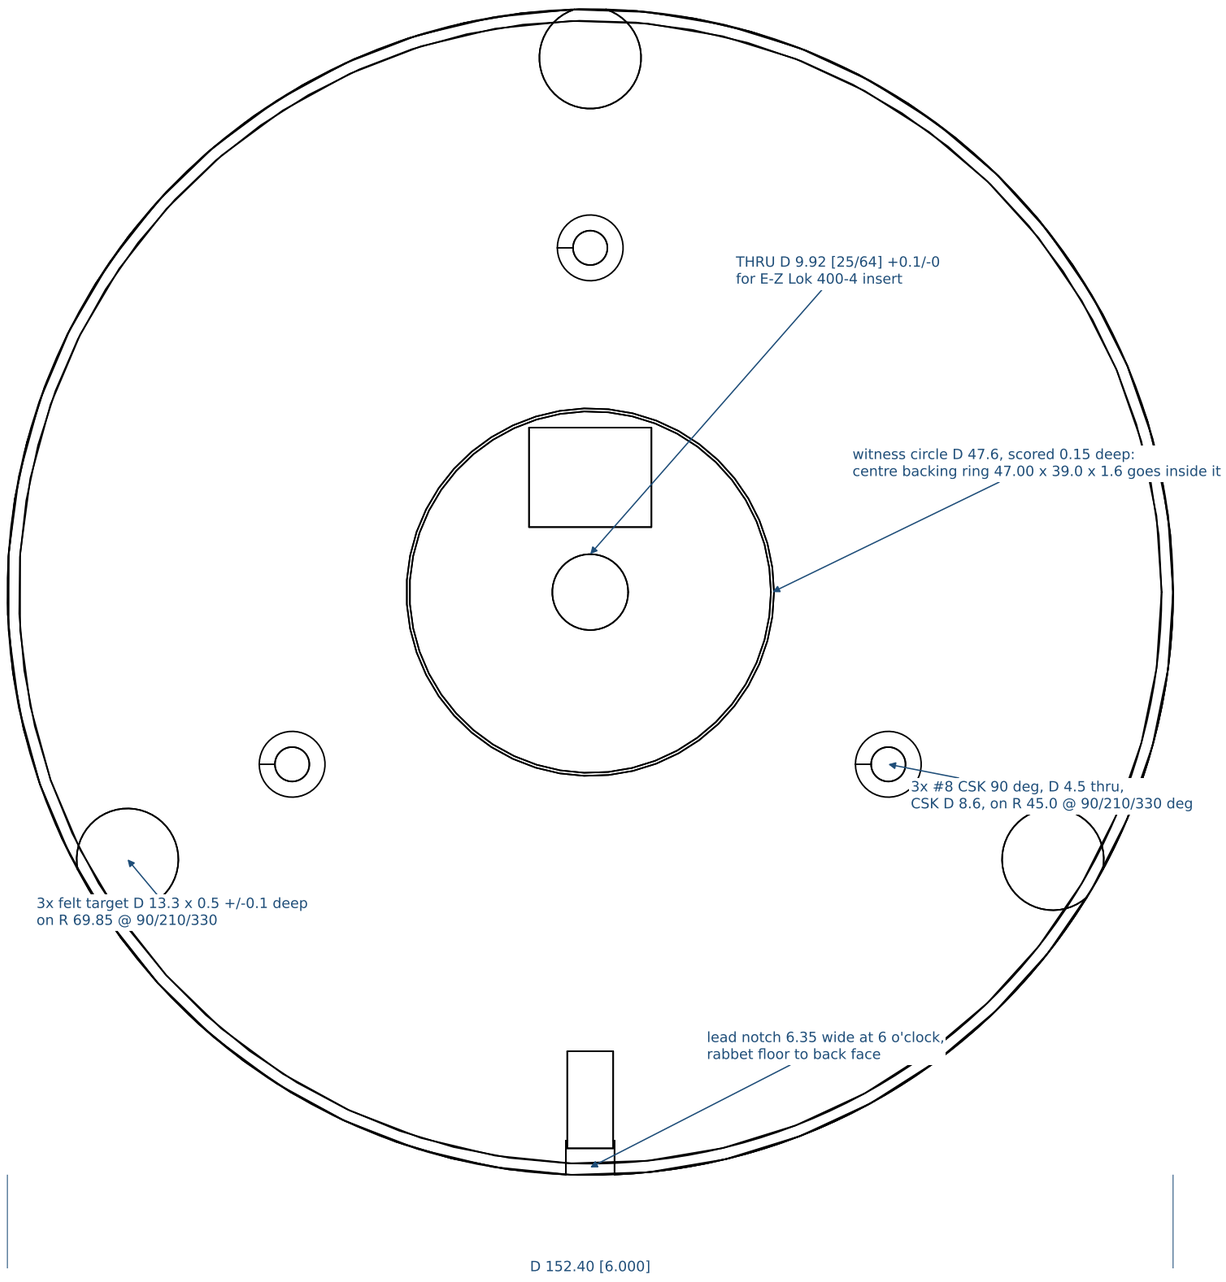

SECTION A-A (x=0), rim detail enlarged below

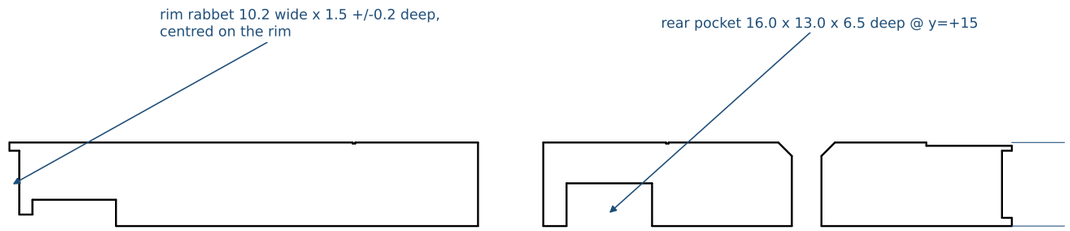

DETAIL: rim rabbet + 6 o'clock lead notch (x=0 cut)

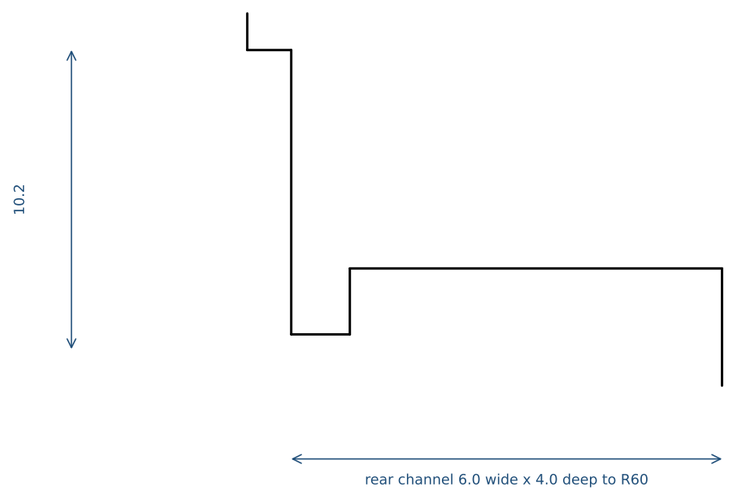

NOTES:

1. E-Z Lok 400-4 brass insert, 1/4-20, in the 25/64 in bore (CA glue in the bore only): driven flush to 0.2 BELOW the FRONT face, never proud (the centre backing ring lies over it). Wipe the insert's BACK end clean: it is an electrical contact on the lit sconce.
2. CENTRE BACKING RING: 47.00 OD x 39.0 ID x 1.6 adhesive felt (same blank as the cap felt) bonded on the FRONT face concentric with the bore, inside the scored witness circle D 47.6 (0.4 wide x 0.15 deep). It backs the record directly behind the cap so the clamp cannot dish it.
3. 3x felt pad targets D 13.3 x 0.5 deep for 1/2 in x 1/16 in felt pads. Pads sit IN the targets: record seat plane = 1.1 above the front face, coplanar with the loaded centre ring.
4. Rim rabbet carries an 8 mm LED strip (6 W max, 4 W class preferred), LEDs facing outward; rabbet floor smooth and painted. NOTE: this 7 in part is NOT on the heat-safe back-face layout of the 12 in rev C plate (no room for the ring outside the hub); see cad/FIXES-heat-layout.md.
5. 3x #8 flat-head countersinks on the FRONT face (hidden by the record) fasten the hub from the front.
6. Rear pocket 16 x 13 x 6.5 at y=+15 sits over the hub's splice cavity; rear channel 6 x 4 routes the LED leads to the hub.
7. Break all edges 0.5 max. Flatness 0.3 over the full front face (the record lies on it). No tear-out on the front face or rim.

RECORD SCONCE | BACKPLATE 6.0 in, CNC MDF

PART NO: RS-BP-7-MDF REV: B DATE: 2026-11-11 SUPERSEDES: rev A (do not build or quote)

MATERIAL: 1/2 in MDF, thickness 12.70 +/-0.15 MEASURED (reject sheet outside it; nominal 1/2 in Baltic birch is 12.0 and is NOT acceptable), both faces flat

FINISH: Matte black, 2 coats, ALL surfaces including the rim rabbet and the notch (sealed MDF: LED tape lets go of raw MDF)

UNITS: mm [in] THIRD-ANGLE PROJECTION SCALE: as shown (not to print scale)

GENERAL TOLERANCES: x.x +/-0.3 x.xx +/-0.1 angles +/-0.5 deg unless noted