

PLAN (either face; the part is symmetric)

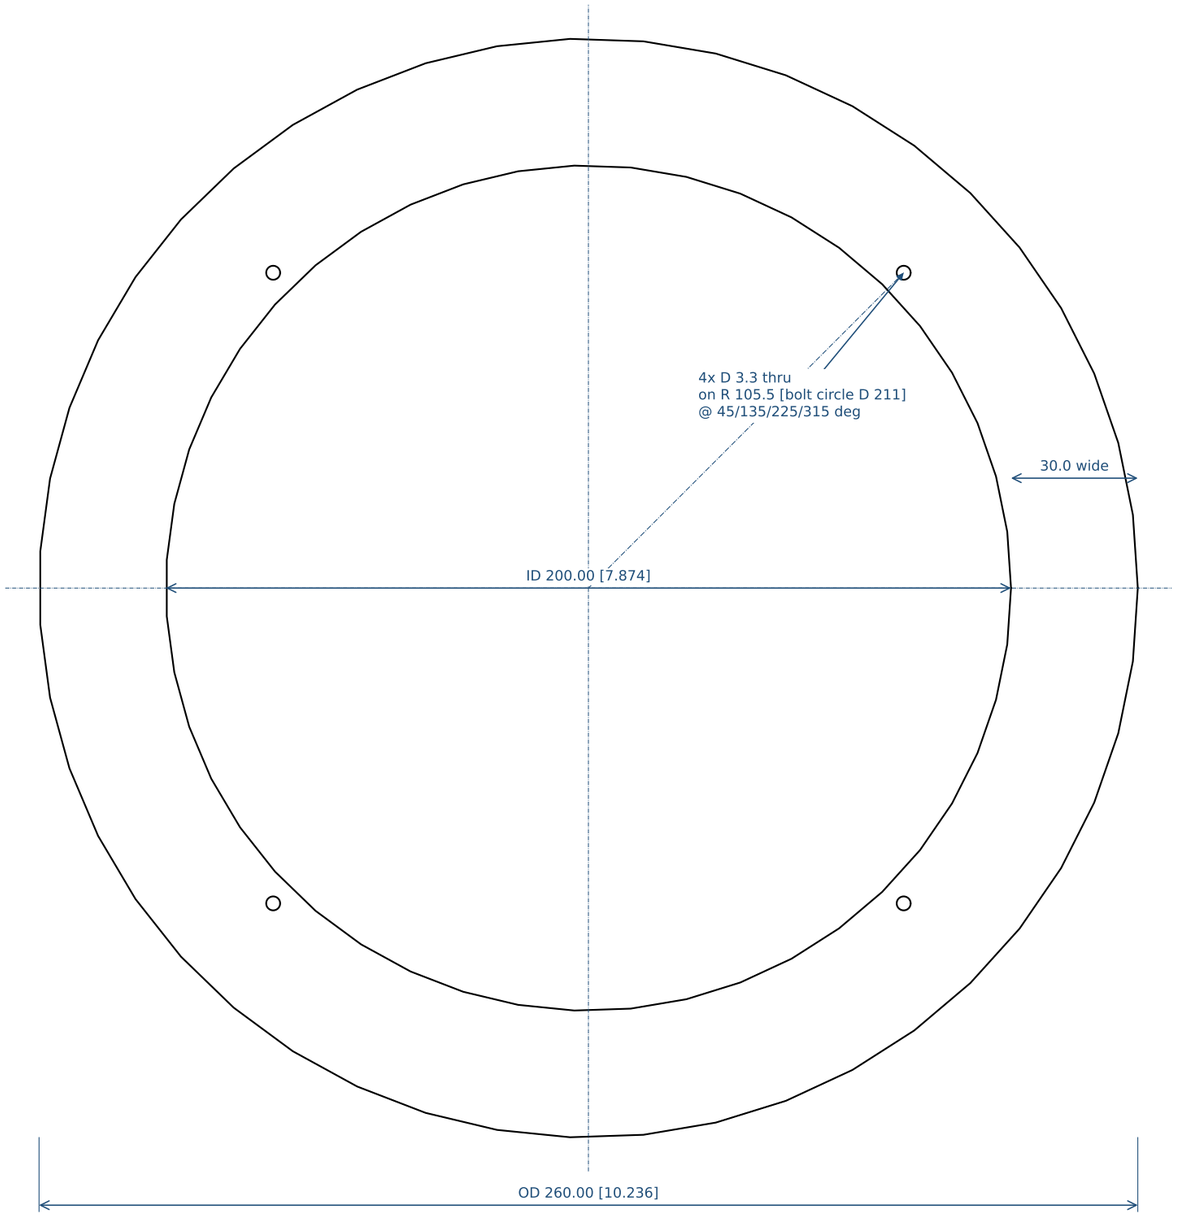

SECTION A-A: radial cut through a hole (45 deg), to scale

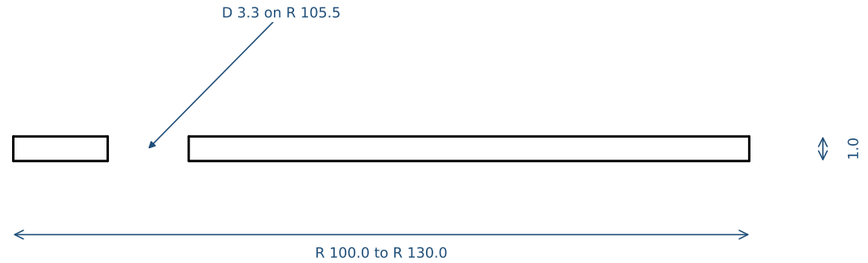

WHERE IT SITS (12 in sconce, plain cap and lit cap)

```
Stack on the backplate BACK face, toward the wall:
  cork ring RS-CK-12        1.6
  aluminium ring RS-HR-12   1.0
  LED strip                 1.6
  total at the strip        4.2   (at a screw head 4.7)
Gap behind the backplate     25.4
Strip face to the wall       21.2
Ring OD inside the backplate rim (R 133.35)   3.35
Ring ID outside the hub (R 63.5)              36.5
Strip R 111 to R 119; screw heads D 5.6 on R 105.5
Mass (5052, 2.68 g/cm3)      58 g
```

NOTES:

1. Flat ring, laser cut: OD 260.0, ID 200.0, 4x D 3.3 thru on R 105.5 at 45/135/225/315 deg. Nothing else. DXF RS-HR-12.dxf is 1:1, mm.
2. Deburr BOTH faces and BOTH edges, break edges 0.2: the LED leads cross the inner edge and a hand will hold it. No heat tint, no dross. Flat within 0.5 over the full ring.
3. Where it goes: on the BACK of the 12 in MDF backplate RS-BP-12-MDF rev C, concentric, with the cork ring RS-CK-12 between it and the wood. The 8 mm LED strip sticks to the WALL-facing face, centred on R 115 (R 111 to R 119), LEDs toward the wall.
4. Fastening: 4x #4 x 3/8 in pan-head screws (Type AB) through this ring and the cork into D 2.2 pilots in the backplate. Snug only: stop when the head touches, do not crush the cork.
5. Assembly order: (1) lay the cork on this ring, holes lined up (adhesive face to the ring if the cork has one); (2) wipe the other face with isopropyl alcohol and lay the strip on it, joint and leads at 6 o'clock; (3) sleeve the solder joints and the leads with heat-shrink where they cross the inner edge (the ring is bare metal, the strip is 12 V); (4) screw the ring to the backplate.
6. Same ring on the plain-cap and the lit-cap 12 in sconce. Not used on the 7 in sconce or on the aluminium-backplate variants.

RECORD SCONCE | HEAT RING 12 in, flat aluminium (spreads the LED strip's heat)

PART NO: RS-HR-12 REV: A DATE: 2026-11-11
MATERIAL: 5052-H32 aluminium sheet, 1.0 mm [0.040 in]. 6061-T6 or 3003-H14 of the same thickness acceptable (tell us)
FINISH: Bare mill finish, both faces clean and oil-free (the LED strip's tape and the cork's adhesive bond to it). No anodise, no paint, no powder coat
UNITS: mm [in] THIRD-ANGLE PROJECTION SCALE: as shown (not to print scale)
GENERAL TOLERANCES: x.x +/-0.3 x.xx +/-0.1 angles +/-0.5 deg unless noted