


FRONT VIEW (record side)

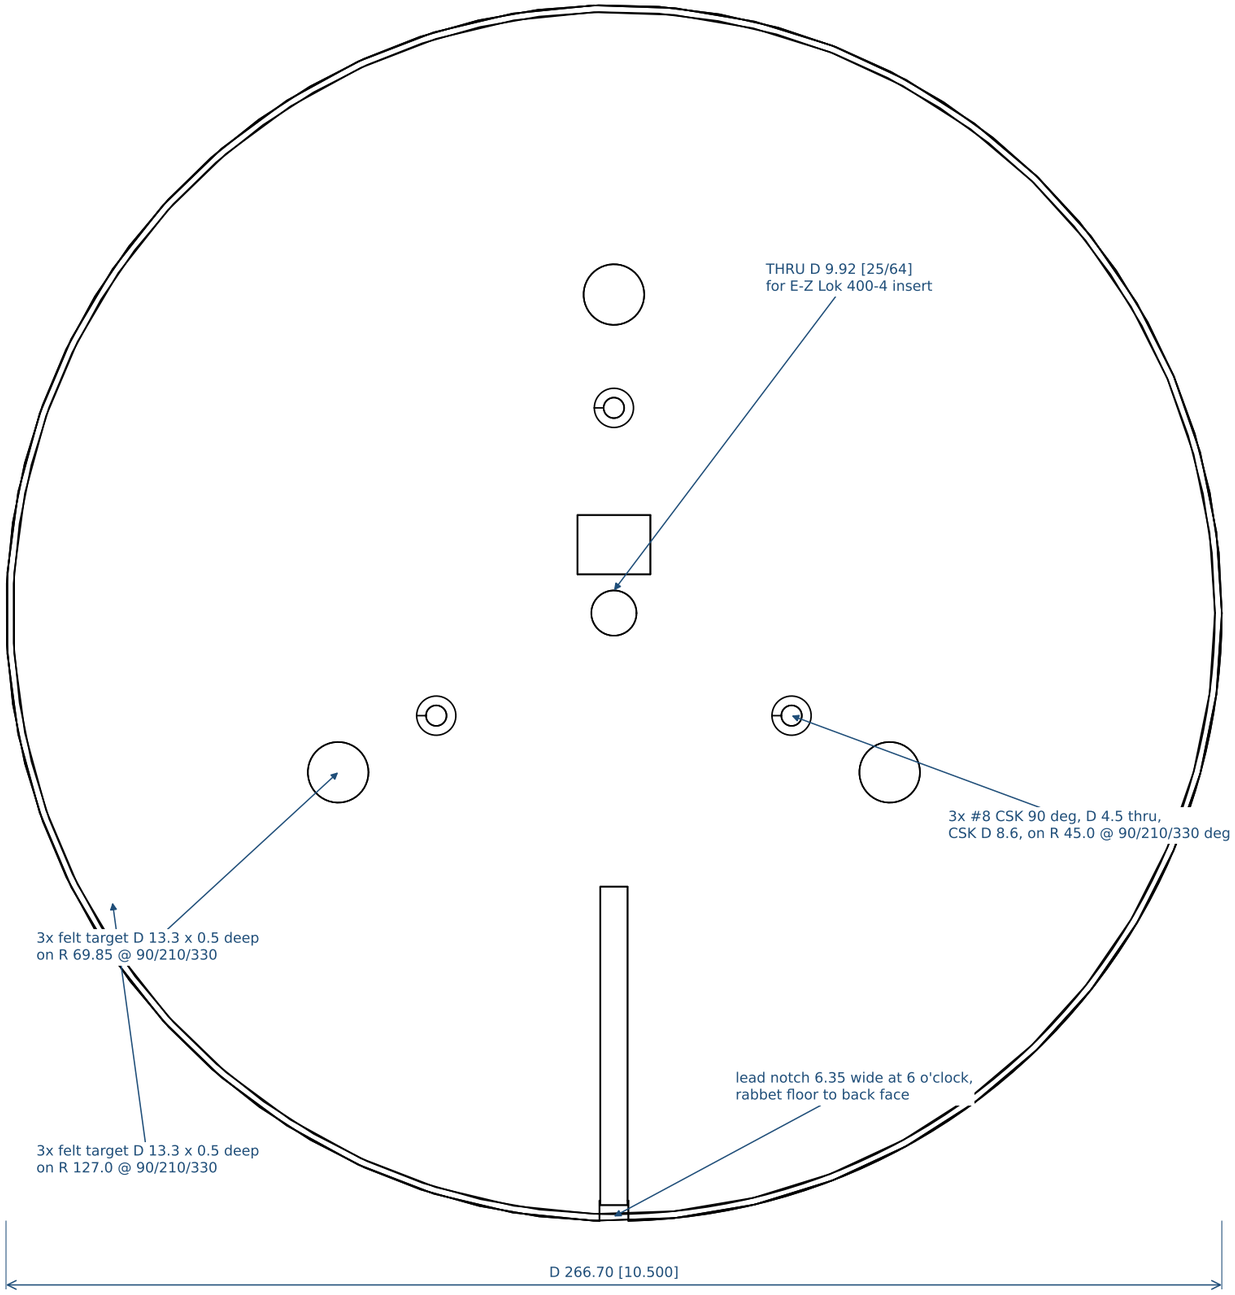

SECTION A-A (x=0), rim detail enlarged below

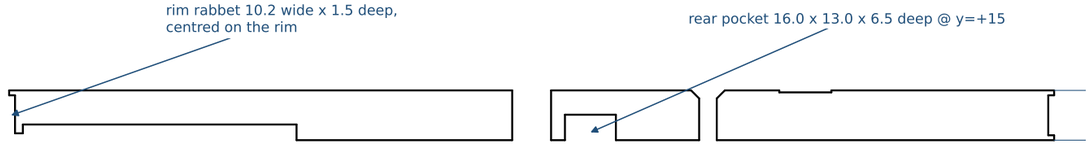

DETAIL: rim rabbet + 6 o'clock lead notch (x=0 cut)

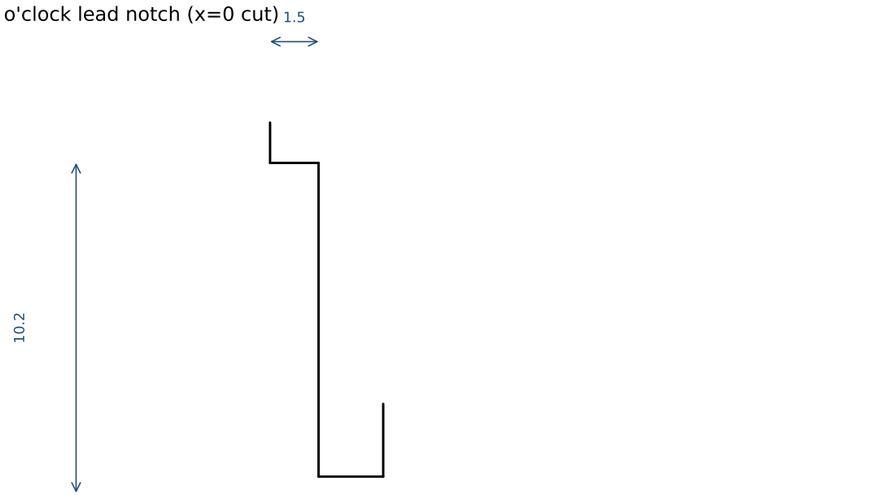

NOTES:

1. E-Z Lok 400-4 brass insert, 1/4-20, driven FLUSH with the FRONT face in the 25/64 in bore (CA glue in MDF).
2. Rim rabbet carries an 8 mm COB LED strip, LEDs facing outward; keep rabbet floor smooth (no fuzz).
3. Felt pad targets are 0.5 mm deep spots for 1/2 in self-adhesive felt pads (assembly aid only).
4. 3x #8 flat-head countersinks on the FRONT face (hidden by the record) fasten the hub from the front.
5. Rear pocket 16 x 13 x 6.5 at y=+15 clears the DC jack body; rear channel 6 x 4 routes the LED leads to the hub.
6. Break all edges 0.5 max. Flatness 0.5 over the full face. No visible tear-out on the front face or rim.

RECORD SCONCE | BACKPLATE 10.5 in, CNC MDF / BIRCH

PART NO: RS-BP-12-MDF REV: A DATE: 2026-11-09

MATERIAL: 1/2 in (12.7) MDF or Baltic birch plywood, both faces flat

FINISH: Matte black, 2 coats (paint after machining); rim rabbet and notch unpainted OK

UNITS: mm [in] THIRD-ANGLE PROJECTION SCALE: as shown (not to print scale)

GENERAL TOLERANCES: x.x +/-0.3 x.xx +/-0.1 angles +/-0.5 deg unless noted