SECTION THROUGH THE AXIS

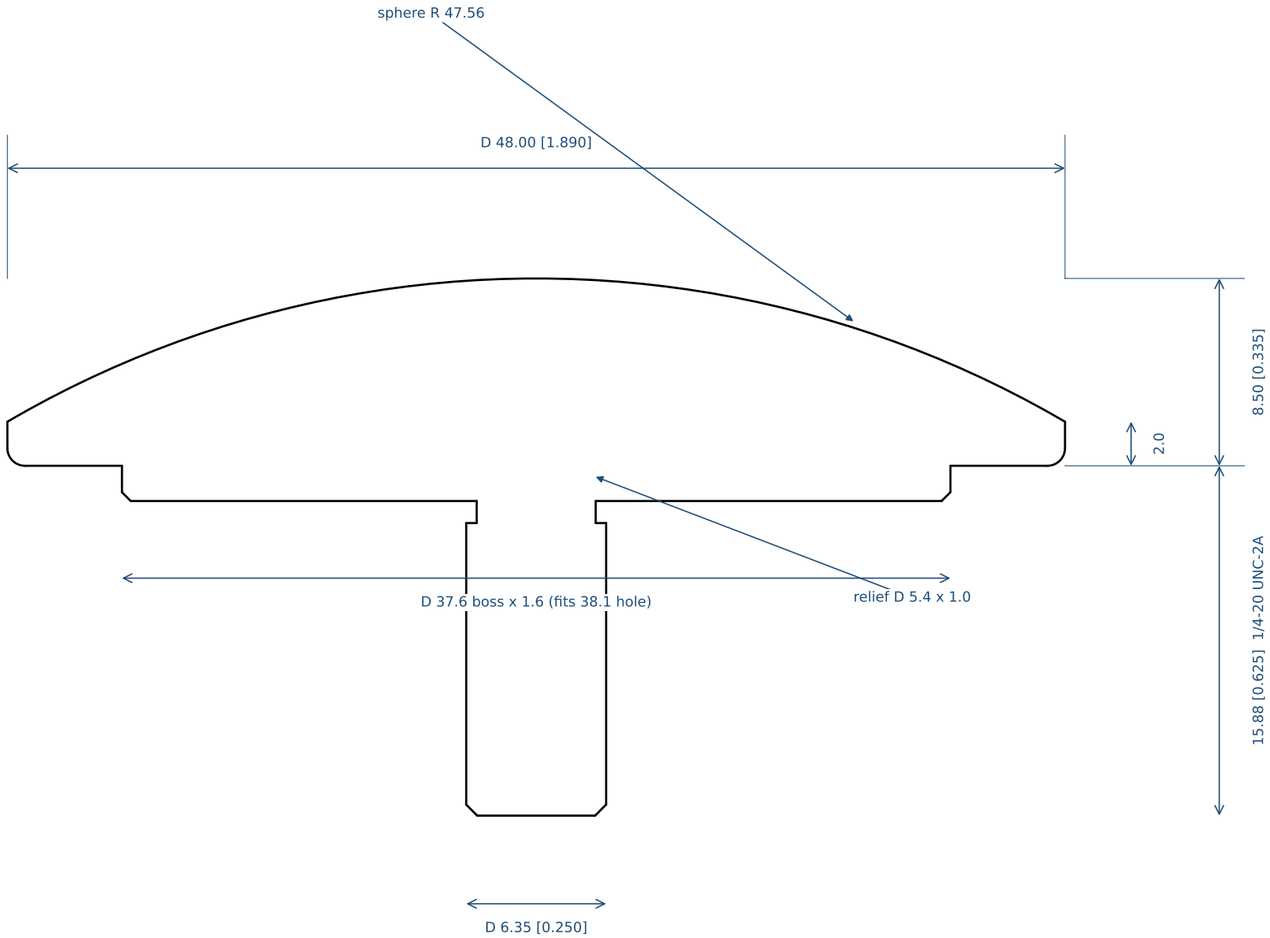

TOP VIEW

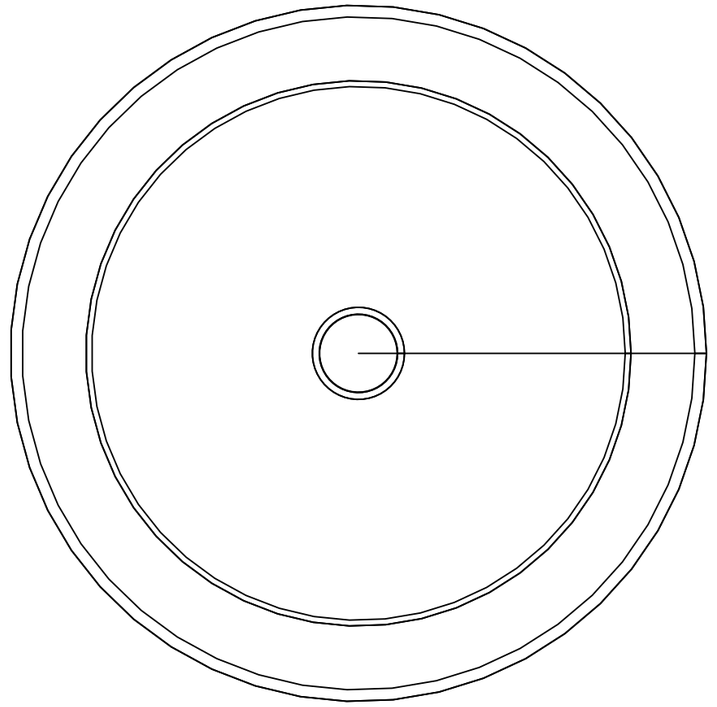

NOTES:

1. Dome is a sphere segment, R 47.56, height 6.5 above a 2.0 straight band; base edge R 0.8. NO knurl, no tool marks on the dome.
2. Thread 1/4-20 UNC-2A, full form to within 1 mm of the shoulder; relief groove D 5.4 x 1.0 at the root; 0.5 x 45 deg chamfer at the tip.
3. Stud axis to dome axis: concentric within 0.05. Underside face flat and square to the stud within 0.05.
4. Plating: mask the thread (or chase after plating). Dome and visible band are Class A, inspect under daylight at 300 mm, zero pits/haze.
5. Underside boss D 37.6 x 1.6 centres the cap in the 38.1 mm 45-rpm hole (replaces the plastic adapter).
6. Finish variants share the same part number with suffix -CR (chrome), -BR (brass), -BK (black).

RECORD SCONCE | DOME CAP 48 mm, 7 in record (45 adapter form)

PART NO: RS-CAP-7 REV: A DATE: 2026-11-09

MATERIAL: Brass C360 (CDA 360) bar, turned in one piece with the 1/4-20 stud. Alt: tapped 1/4-20 x 0.40 deep + 1/4-20 x 1-1/8 stainless threaded stud, Loctite 243

FINISH: CHROME: polish to mirror (Ra <= 0.1 um) then copper + bright nickel + decorative chrome per ASTM B456 SC2 (or PVD chrome over bright nickel). BRASS: polish + clear lacquer or brushed + lacquer. BLACK: black chrome over bright nickel, or PVD black (TiC/DLC), or black nickel + lacquer

UNITS: mm [in] THIRD-ANGLE PROJECTION SCALE: as shown

GENERAL TOLERANCES: x.x +/-0.3 x.xx +/-0.1 angles +/-0.5 deg unless noted