
SECTION x=0 (black = custom parts, grey = purchased, red dashed = customer record)

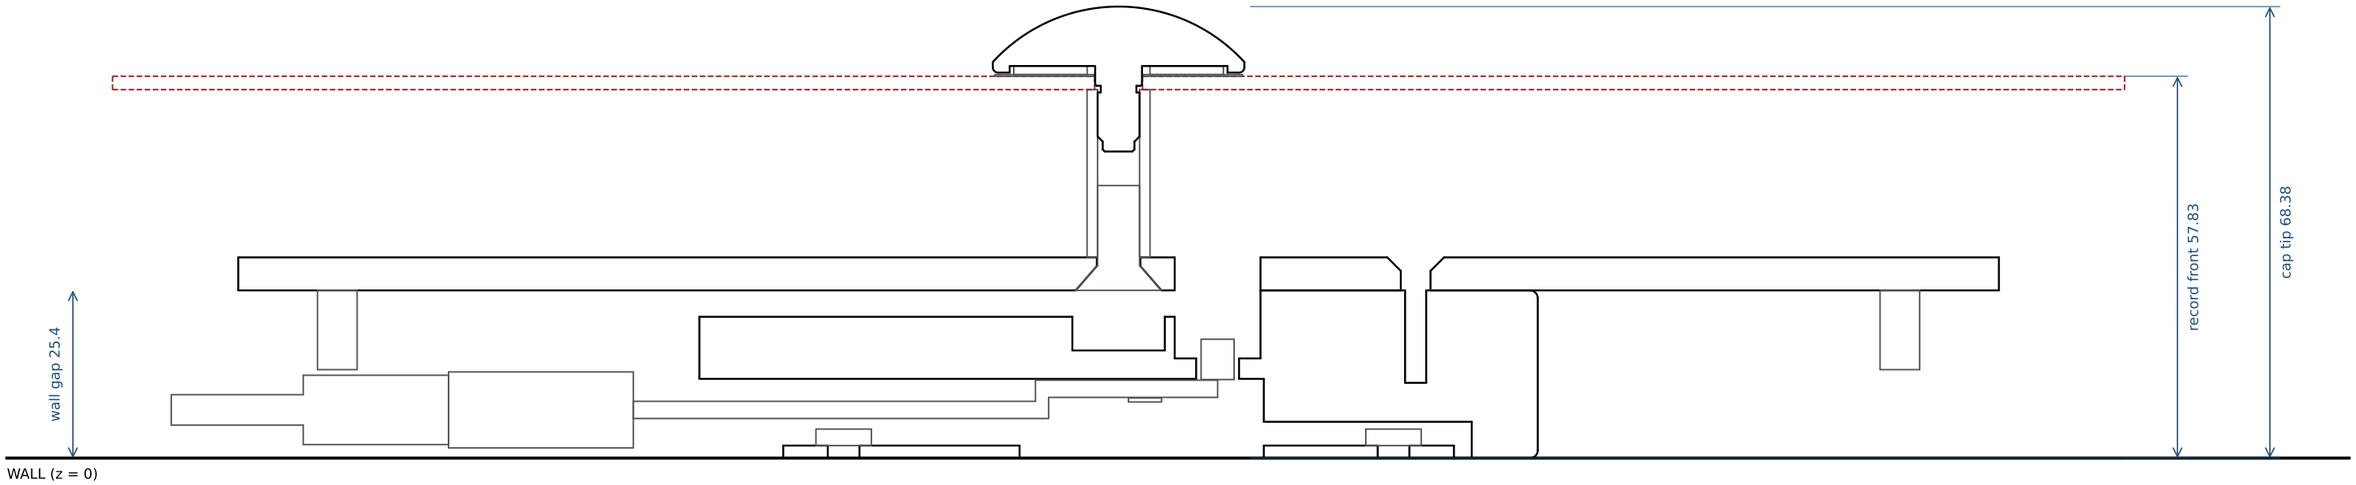

NOTES:

1. Section through x=0 (12 o'clock up). Wall at z=0. Customer record shown for fit only.
2. Hub rear face and plate rear face both sit on the wall; the plate hides in the hub recess.
3. MDF: record rests on the felt pads AND the centre backing ring (coplanar), clamped felt - record - felt in line. Aluminum: on the 1 in standoff.
4. Cap studs (RS-CAP-12 rev D 11.95, RS-CAP-7 rev C 12.6): fully engaged, never proud of the backplate back face (see checks.md). Clear PET label washer under every cap.
5. Power: 150 mm pigtail with an inline female 5.5 x 2.1 jack, P-clipped in the hub. Shown on the surface route (6 o'clock channel, mated behind the backplate); for in-wall it turns back through the plate slot and a 1 in wall hole.
6. Aluminium-backplate variant: neon flex ring on the back face. NOT covered by the heat-safe layout D of the 12 in MDF sconce and not thermally modelled.
7. From the wall, measured on this assembly: backplate back 25.40, record front 57.83, cap tip 68.38 (furthest point). All clearances verified by boolean interference check in assembly.py (0 hits).

RECORD SCONCE | ASSEMBLY SECTION, 12 in record, backplate AL5

PART NO: RS-ASM-12-AL5 REV: A DATE: 2026-11-11
MATERIAL: see parts list in README.md
FINISH: n/a
UNITS: mm [in] THIRD-ANGLE PROJECTION SCALE: as shown
GENERAL TOLERANCES: x.x +/-0.3 x.xx +/-0.1 angles +/-0.5 deg unless noted