

SECTION x=0 (black = custom parts, grey = purchased, red dashed = customer record)

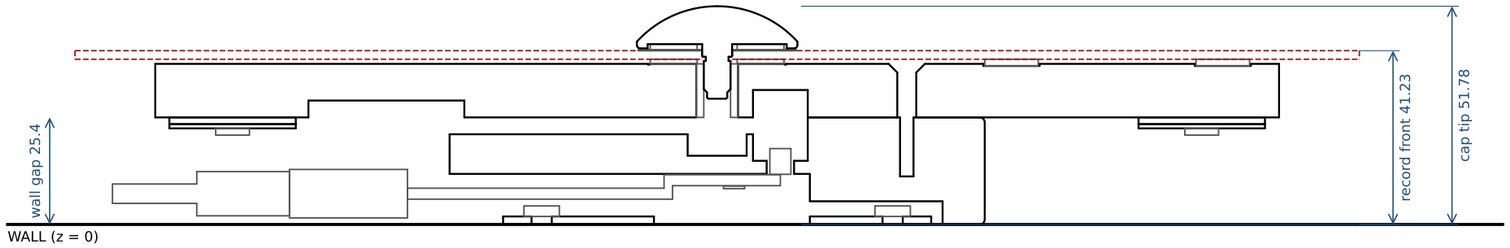

HALO DETAIL, top edge, section x=0 (same on plain and lit)

Record overhangs the backplate 19.05. The strip is 14.35 inside the rim, on the far side of the wood: no line of sight to the record. 4x #4 x 3/8 screws on R 105.5 at 45/135/225/315 deg are not in this cut.

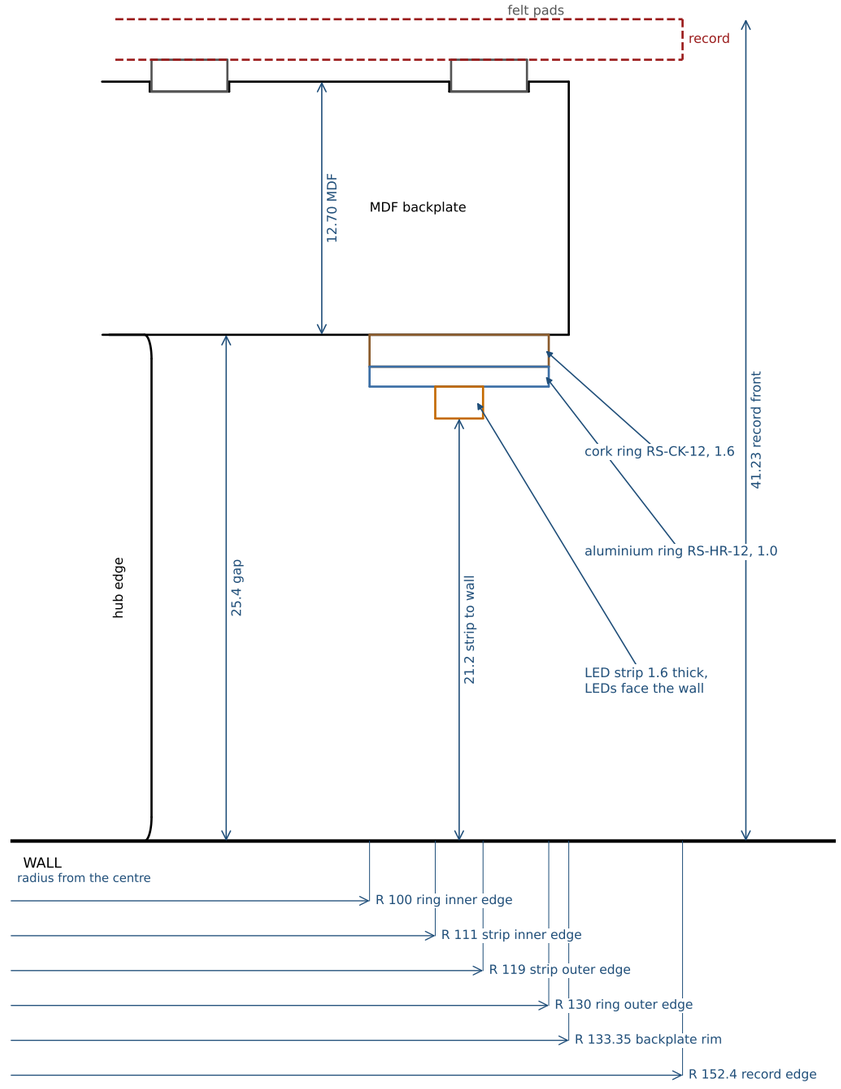

NOTES:

1. Section through x=0 (12 o'clock up). Wall at z=0. Customer record shown for fit only.
2. Hub rear face and plate rear face both sit on the wall; the plate hides in the hub recess.
3. MDF: record rests on the felt pads AND the centre backing ring (coplanar), clamped felt - record - felt in line. Aluminum: on the 1 in standoff.
4. Cap studs (RS-CAP-12 rev D 11.95, RS-CAP-7 rev C 12.6): fully engaged, never proud of the backplate back face (see checks.md). Clear PET label washer under every cap.
5. Power: 150 mm pigtail with an inline female 5.5 x 2.1 jack, P-clipped in the hub. Shown on the surface route (6 o'clock channel, mated behind the backplate); for in-wall it turns back through the plate slot and a 1 in wall hole.
6. HEAT-SAFE HALO (rev 2026-11-11, same on the plain-cap and lit-cap sconce): the 8 mm LED strip is on the BACK of the backplate, LEDs facing the wall, on the 1.0 aluminium ring RS-HR-12 over the 1.6 cork ring RS-CK-12 (OD 260, ID 200), strip centred on R 115. Held by 4x #4 x 3/8 screws on R 105.5 into blind pilots. Stack 4.2 deep in the 25.4 gap; strip face 21.2 from the wall. Strip leads run in the 6 o'clock back channel to the hub splice cavity. No strip on the rim.
7. From the wall, measured on this assembly: backplate back 25.40, record front 41.23, cap tip 51.78 (furthest point). All clearances verified by boolean interference check in assembly.py (0 hits).

RECORD SCONCE | ASSEMBLY SECTION, 12 in record, backplate MDF

PART NO: RS-ASM-12-MDF REV: B DATE: 2026-11-11 SUPERSEDES: rev A (LED strip on the rim) (do not build or quote)

MATERIAL: see parts list in README.md

FINISH: n/a

UNITS: mm [in] THIRD-ANGLE PROJECTION SCALE: as shown

GENERAL TOLERANCES: x.x +/-0.3 x.xx +/-0.1 angles +/-0.5 deg unless noted