
SECTION x=0 (black = custom parts, grey = purchased, red dashed = customer record)

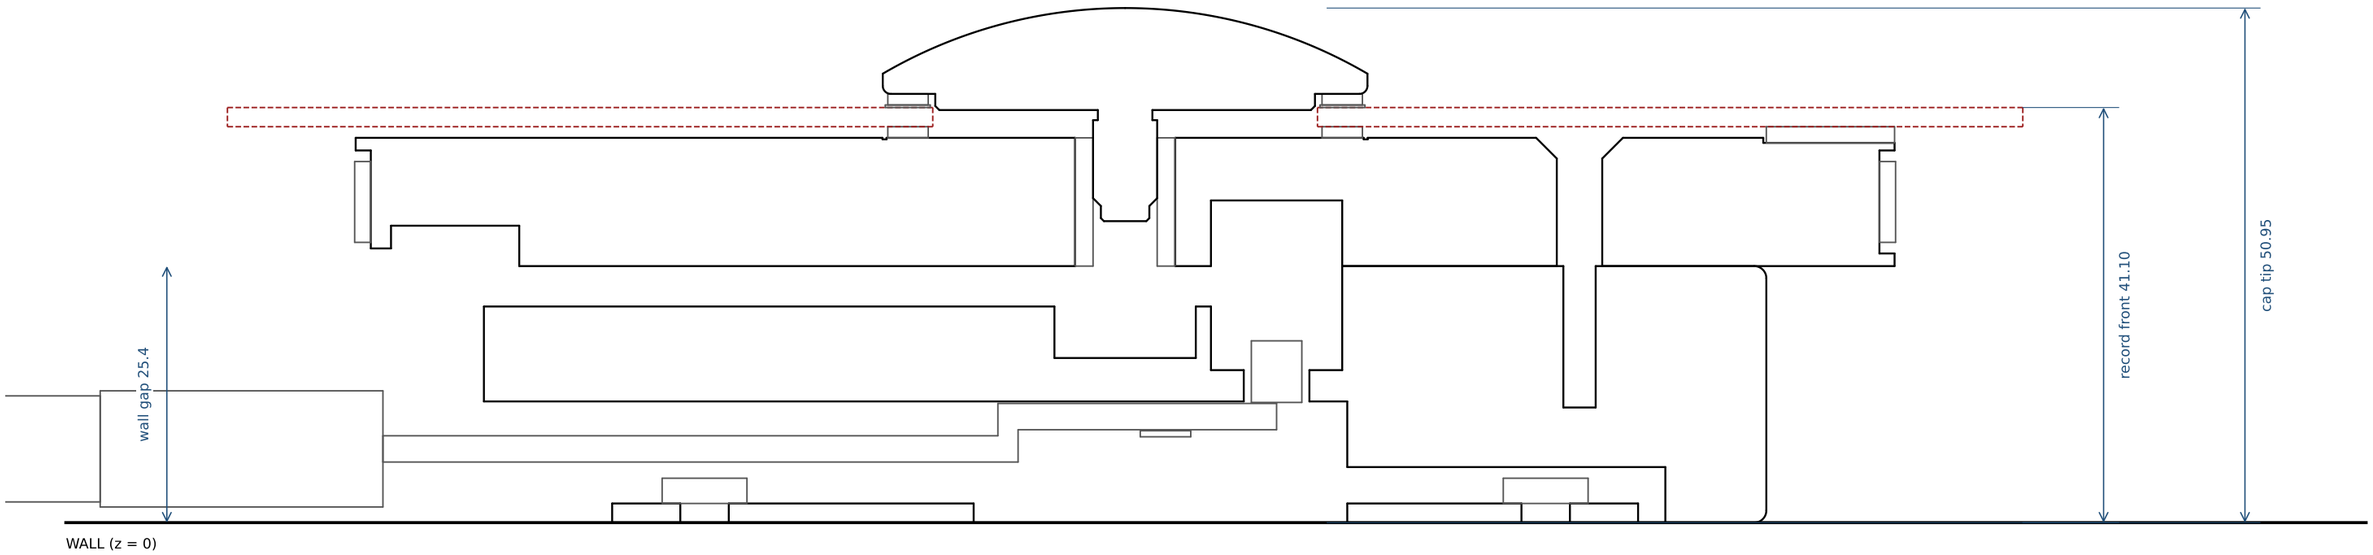

NOTES:

1. Section through x=0 (12 o'clock up). Wall at z=0. Customer record shown for fit only.
2. Hub rear face and plate rear face both sit on the wall; the plate hides in the hub recess.
3. MDF: record rests on the felt pads AND the centre backing ring (coplanar), clamped felt - record - felt in line. Aluminum: on the 1 in standoff.
4. Cap studs (RS-CAP-12 rev D 11.95, RS-CAP-7 rev C 12.6): fully engaged, never proud of the backplate back face (see checks.md). Clear PET label washer under every cap.
5. Power: 150 mm pigtail with an inline female 5.5 x 2.1 jack, P-clipped in the hub. Shown on the surface route (6 o'clock channel, mated behind the backplate); for in-wall it turns back through the plate slot and a 1 in wall hole.
6. LED strip on this 7 in sconce is still in the RIM rabbet, facing outward. It is NOT on the heat-safe back-face layout of the 12 in sconce (the back face outside the hub is only 9.35 wide). Open item, see cad/FIXES-heat-layout.md.
7. From the wall, measured on this assembly: backplate back 25.40, record front 41.10, cap tip 50.95 (furthest point). All clearances verified by boolean interference check in assembly.py (0 hits).

RECORD SCONCE | ASSEMBLY SECTION, 7 in record, backplate MDF

PART NO: RS-ASM-7-MDF REV: A DATE: 2026-11-11
MATERIAL: see parts list in README.md
FINISH: n/a
UNITS: mm [in] THIRD-ANGLE PROJECTION SCALE: as shown
GENERAL TOLERANCES: x.x +/-0.3 x.xx +/-0.1 angles +/-0.5 deg unless noted