SECTION y=0

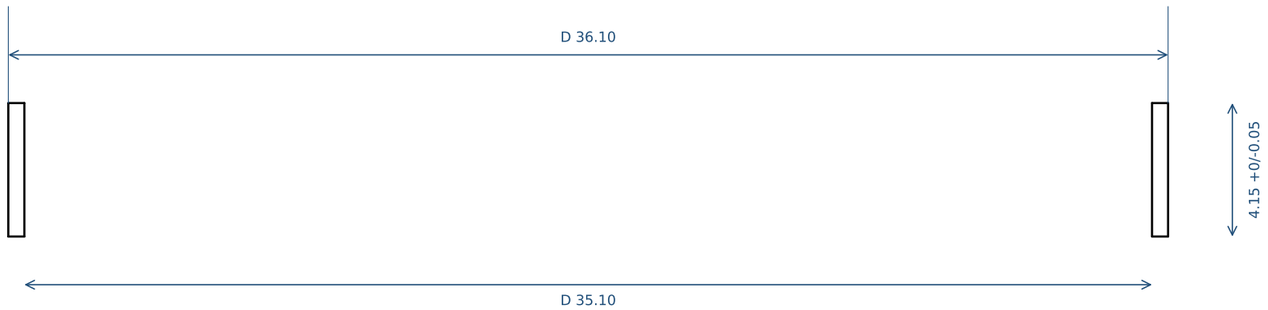


**NOTES:**

1. Ring D 36.10 x D 35.10 x 4.15 +0/-0.05 high. Geometry unchanged from rev A.
2. Sits on the core flange under the dome lip overhang (1.0 mm). The lip is 0.25 ABOVE its top face (rev A 0.05): it is never clamped. 3 dots of UV adhesive.
3. No yellowing grade: UV-stabilised PC or PMMA.

## RECORD SCONCE | LABEL-LIGHT WINDOW RING

PART NO: RS-CAP-12L-WINDOW REV: B DATE: 2026-11-11 SUPERSEDES: rev A, A.1 (do not build or quote)
MATERIAL: Clear polycarbonate (Makrolon 2407 or equal) or PMMA, turned from tube or moulded
FINISH: Inner face polished/clear. OUTER face light satin: scatter sigma ~3 deg (glass-bead blast 150-200 grit at low pressure, or mould texture MT-11010). Approve on a sample: satin 1-6 deg changes the light profile, see DESIGN.md sec. 5.
UNITS: mm [in] THIRD-ANGLE PROJECTION SCALE: as shown
GENERAL TOLERANCES: x.x +/-0.3 x.xx +/-0.1 angles +/-0.5 deg unless noted