

PLAN (either face; the part is symmetric)

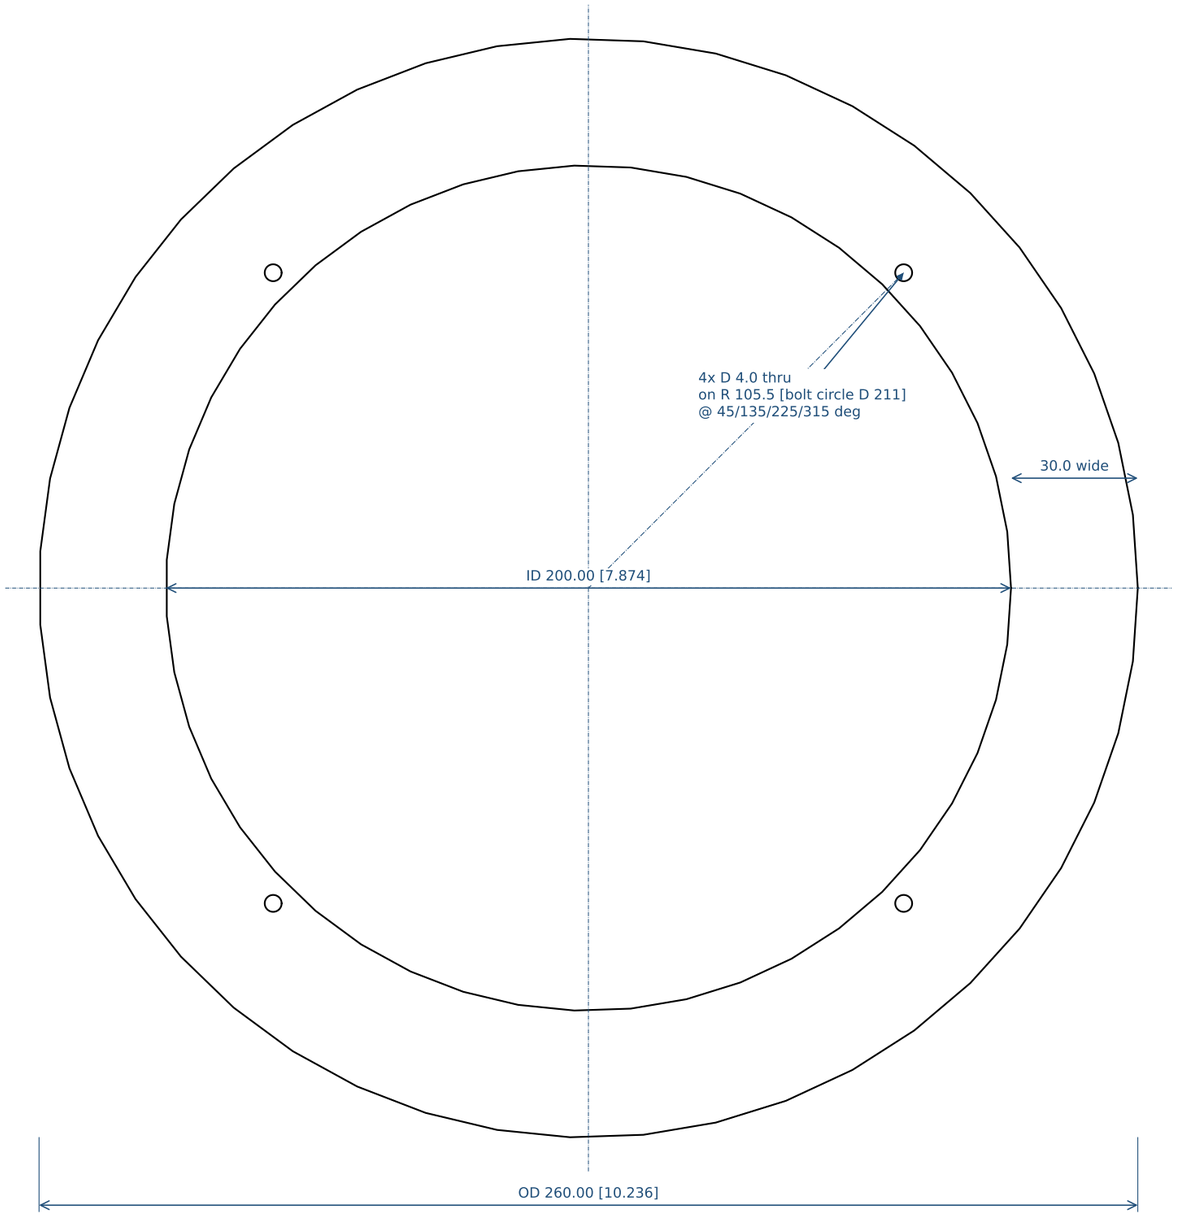

SECTION A-A: radial cut through a hole (45 deg), to scale

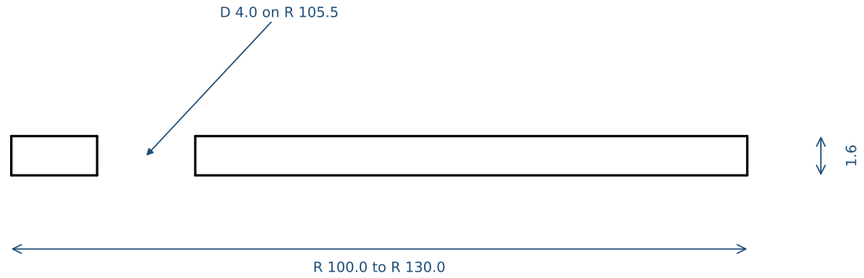

WHERE IT SITS (12 in sconce, plain cap and lit cap)

```
Stack on the backplate BACK face, toward the wall:
  cork ring RS-CK-12        1.6
  aluminium ring RS-HR-12   1.0
  LED strip                 1.6
  total at the strip        4.2   (at a screw head 4.7)
Gap behind the backplate     25.4
Strip face to the wall       21.2
Ring OD inside the backplate rim (R 133.35)   3.35
Ring ID outside the hub (R 63.5)              36.5
Strip R 111 to R 119; screw heads D 5.6 on R 105.5
```

NOTES:

1. Flat ring, die cut, knife cut or laser cut: OD 260.0, ID 200.0, 4x D 4.0 thru on R 105.5 at 45/135/225/315 deg (punch the 4 holes; they line up with the aluminium ring's). DXF RS-CK-12.dxf is 1:1, mm.
2. Tolerance on OD, ID and hole position +/-0.5 (soft part). No cracks, no missing chunks wider than 2 mm at any edge. May be supplied in up to 4 butt-jointed segments if a 260 mm ring does not nest on your sheet (tell us).
3. Where it goes: between the aluminium heat ring RS-HR-12 and the BACK face of the MDF backplate RS-BP-12-MDF rev C. If it has an adhesive face, that face goes on the ALUMINIUM. The plain face lies on the painted MDF and is held by the 4 ring screws.
4. Why it is there: 1.6 mm of cork is a much poorer heat path than wood, so less of the strip's heat reaches the backplate and the record (cad/THERMAL.md).
5. Same ring on the plain-cap and the lit-cap 12 in sconce. Not used on the 7 in sconce or on the aluminium-backplate variants.

RECORD SCONCE | CORK RING 12 in (insulates the wood from the warm aluminium ring)

PART NO: RS-CK-12 REV: A DATE: 2026-11-11
MATERIAL: Cork sheet, fine grain, 1.6 mm [1/16 in] +/-0.2. Plain composition cork. Pressure-sensitive adhesive on ONE face preferred; cork with no adhesive is acceptable (the 4 ring screws hold it). 1.5 mm sheet acceptable
FINISH: None. Natural cork. Adhesive liner, if any, left on
UNITS: mm [in] THIRD-ANGLE PROJECTION SCALE: as shown (not to print scale)
GENERAL TOLERANCES: x.x +/-0.3 x.xx +/-0.1 angles +/-0.5 deg unless noted