


PLAN (features up to z=19, +X to the right = room-side orientation). +Y = 12 o'clock

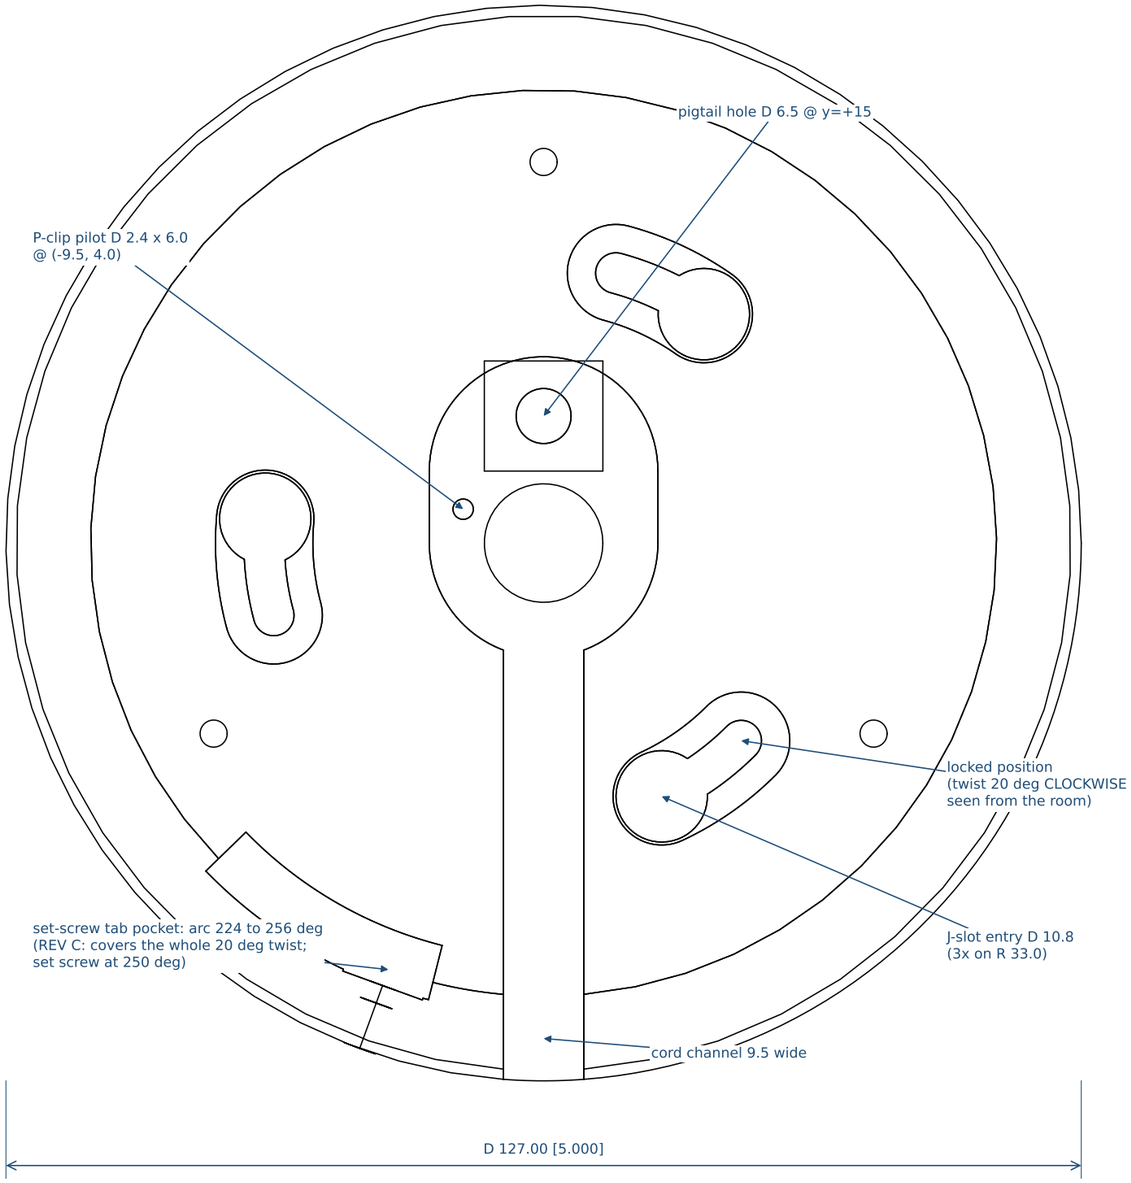

SECTION B-B (x=0): cable pocket, web, channels, splice cavity, centre relief

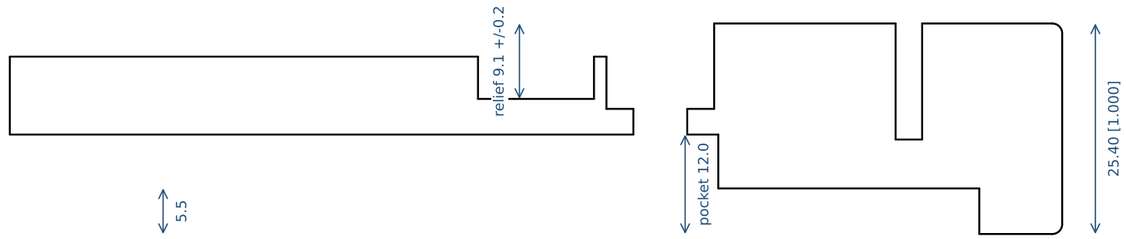

SECTION C-C through a stud (75 deg, locked position): recess, J-web, nut pocket

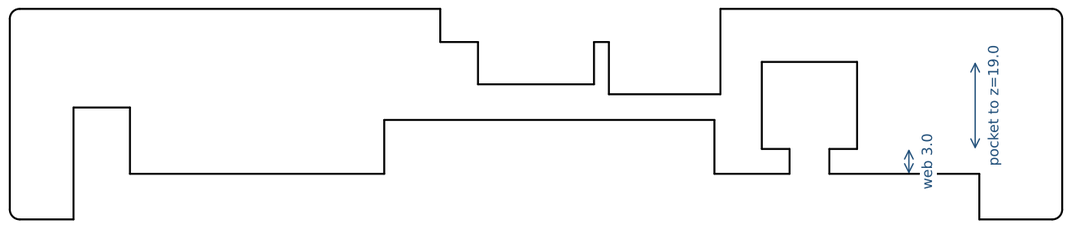

NOTES:

1. Hidden part: sits between the backplate and the wall. Rear face (z=0) is the wall face.
2. Rear recess D 107 x 5.5 deep swallows the 4 in steel plate and screw heads.
3. 3x J-slots on R 33.0: entry D 10.8 at 55, 175, 295 deg, shank slot 4.8 wide, 20 deg arc to the locked position at 75, 195, 315 deg (angles in the FRONT / room-side view): the hub LOCKS CLOCKWISE seen from the room. Nut pocket 11.5 wide above the 3.0 web, ceiling z=19.0.
4. NO DC JACK (rev B). Rear cable pocket: slot 27.0 wide, y -13.5..+22.0, 12.0 deep. D 6.5 pigtail hole at (0,+15) through a 3.1 web into the splice cavity 14.0 x 13.0 (opens to the FRONT). D 2.4 x 6.0 pilot at (-9.5, 4.0) in the pocket ceiling for the P-clip screw (#4 x 3/8): the strain relief for the 150 mm 18 AWG pigtail.
5. Rear cord channel 9.5 x 12.0 deep, 6 o'clock, pocket to rim: the pigtail leaves here for a surface cord, or turns back through the plate slot for in-wall. Front lead channel 6.0 x 4.0 deep, 6 o'clock, rim to cavity.
6. Front centre relief D 14.0 x 9.1 +/-0.2 deep (rev A 4.5), floor flat: seat of the label-light contact module. Mark '12 V DC ONLY' beside the cord channel (label or deboss 0.4).
7. M3 heat-set insert (D 4.0 x 5.7 pilot) in the rim at 250 deg, z=9.5; M3x12 set screw lands in the plate tab. 3x D 3.2 x 14.0 pilots on R 45.0 (front) for #8 x 1 in screws.

RECORD SCONCE | HUB, twist-lock, PETG/ASA print (IM-ready)

PART NO: RS-HUB-01 REV: C DATE: 2026-11-11 SUPERSEDES: rev A, rev B (rev B could not be twisted onto the plate: tab pocket too short) (do not build or quote)

MATERIAL: PETG or ASA, FDM: 0.2 mm layers, 5 perimeters, 40% gyroid, print REAR face down. Later: injection moulded ABS/PC-ABS

FINISH: As printed, matte black or dark grey filament. IM: SPI-C1 texture, add 0.5-1 deg draft on all pockets at tooling

UNITS: mm [in] THIRD-ANGLE PROJECTION SCALE: as shown

GENERAL TOLERANCES: x.x +/-0.3 x.xx +/-0.1 angles +/-0.5 deg unless noted