FRONT VIEW (record side)

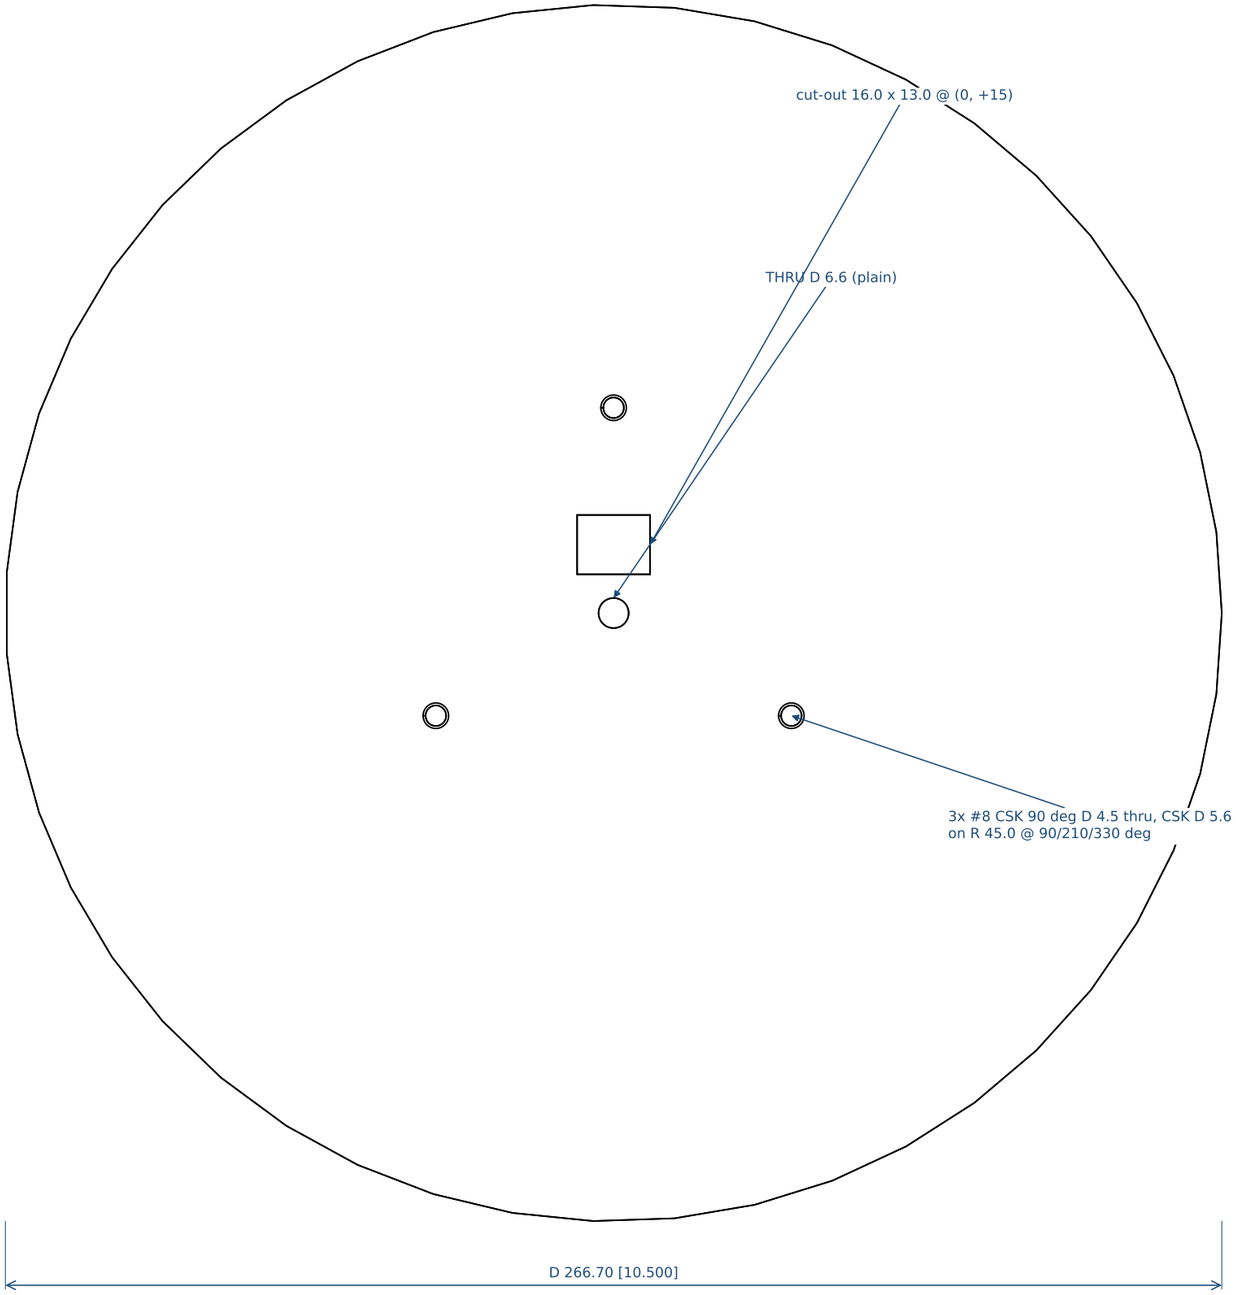

SECTION A-A (x=0)



NOTES:

1. Centre: 1/4-20 pan head on the back face (sits in the hub relief); plain D 6.6 hole. Screw goes into a 3/8 in OD x 1 in 1/4-20 F-F aluminum standoff on the FRONT face (the record rests on it).
2. 3x #8 flat-head countersinks on the FRONT face (hidden by the record) fasten the hub from the front.
3. 16 x 13 through cut-out at y=+15 sits over the hub's splice cavity (pigtail to LED leads).
4. LED for this variant: 6 x 12 mm top-emitting 12 V COB neon flex laid as a ring on the BACK face, centreline R 118, emitting toward the wall.
5. Laser or waterjet; deburr both faces; no heat-tint on the visible edge. Flatness 0.5 over the face after coating.
6. Countersinks may be done by the cutting vendor (SendCutSend / OSH Cut countersink service) or in-house.

RECORD SCONCE | BACKPLATE 10.5 in, FLAT ALUMINUM 3 mm (floating record)

PART NO: RS-BP-12-AL3 REV: A DATE: 2026-11-11
MATERIAL: 5052-H32 aluminum sheet, 3.0 mm [0.118 in]
FINISH: Powder coat matte black (RAL 9005 texture or equal), all over, mask threads not required (no threads)
UNITS: mm [in] THIRD-ANGLE PROJECTION SCALE: as shown
GENERAL TOLERANCES: x.x +/-0.3 x.xx +/-0.1 angles +/-0.5 deg unless noted