

VIEW FROM THE HUB SIDE (studs toward viewer). +Y = 12 o'clock

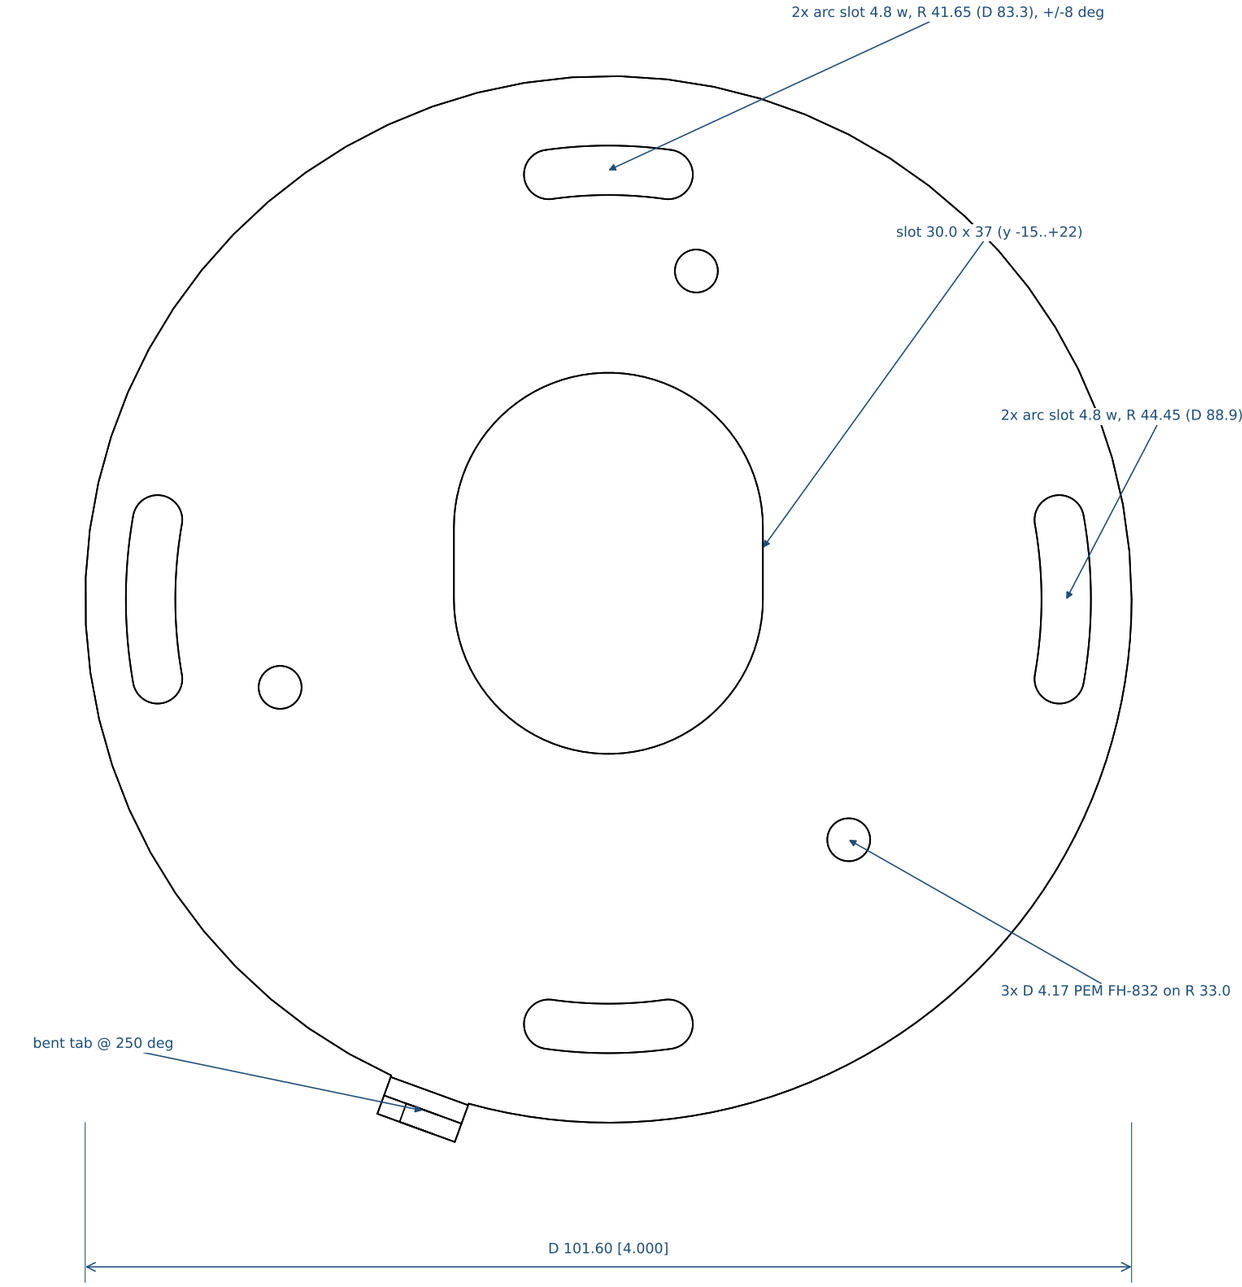

SECTION D-D through the tab (radial cut at 250 deg)

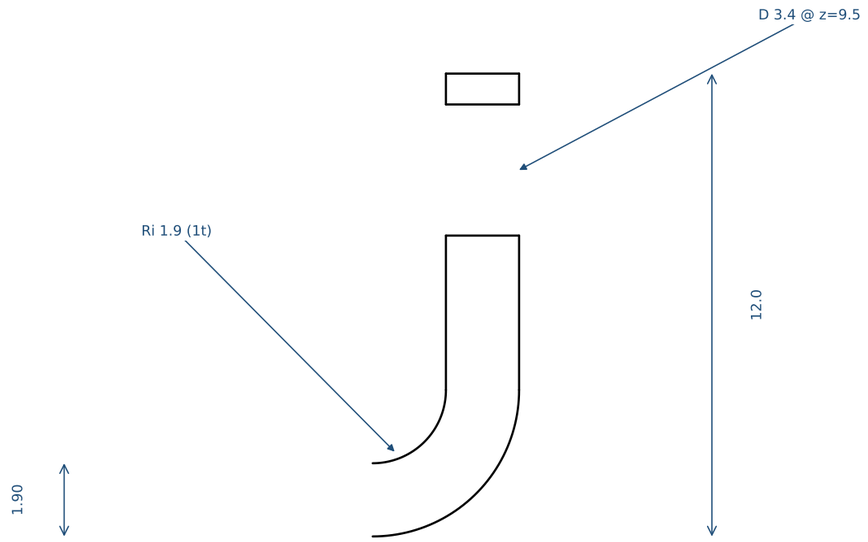

FLAT PATTERN (see RS-WP-01_flat.dxf)

```
Bend allowance (90 deg, Ri 1.9, t 1.90, K 0.44) = 4.30 mm
Tab flat length from the plate edge (R 50.8) = 12.50 mm  (ends at R 63.30)
Bend line (centre of bend zone) at R 52.95
Tab hole centre in the flat at R 60.80 on the 250 deg radial
Flat envelope: 101.6 x 114.1 mm
```

NOTES:

1. Flat pattern in RS-WP-01_flat.dxf (1:1, mm). One 90 deg bend UP (toward the hub side), inside radius 1.9 (1t), K=0.44, tab at the 250 deg position.
2. 3x PEM self-clinching studs FH-832-10 (8-32 x 5/8) pressed from the WALL face (flush side to wall), in D 4.17 holes on R 33.0 @ 75, 195, 315 deg. Verify hole size on PEM bulletin FH before cutting.
3. 4x arc slots 4.8 wide: pair on D 83.3 (single-gang / LV bracket) at 90/270 deg, +/-8 deg (REV B: was +/-10, too close to the 75 deg stud hole); pair on D 88.9 (round / octagon box) at 0/180 deg, +/-10 deg. Stud holes D 4.17 (PEM FH-832: 4.14 to 4.22), each at least 7.14 from any edge.
4. Centre slot 30.0 wide x 37 long passes the hub pigtail and its inline jack (in-wall route); the wall hole is 1 in, on the plate centre.
5. Tab: 8.0 wide, stands 12.0 above the wall face, D 3.4 hole at z=9.5 for the M3 set screw.
6. Deburr all edges; no sharp edge toward the wall. Flat within 0.3 after forming.

RECORD SCONCE | WALL MOUNTING PLATE, 14 ga steel, formed

PART NO: RS-WP-01 REV: B DATE: 2026-11-11 SUPERSEDES: rev A (gang slots +/-10 deg, stud holes D 4.22) (do not build or quote)
MATERIAL: Mild steel CRS, 14 ga (0.0747 in / 1.90 mm). Alt: 304 SS 14 ga
FINISH: Powder coat black, studs masked (SendCutSend cannot zinc plate 0.074 in steel, checked 2026-11-11). Alt: G90 galvanized sheet, no finish. Hidden part
UNITS: mm [in] THIRD-ANGLE PROJECTION SCALE: as shown
GENERAL TOLERANCES: x.x +/-0.3 x.xx +/-0.1 angles +/-0.5 deg unless noted