


wires enter from this side (USB end of the Arduino)

EXTERNAL 24 V SOURCE: +

- (either 0V screw)

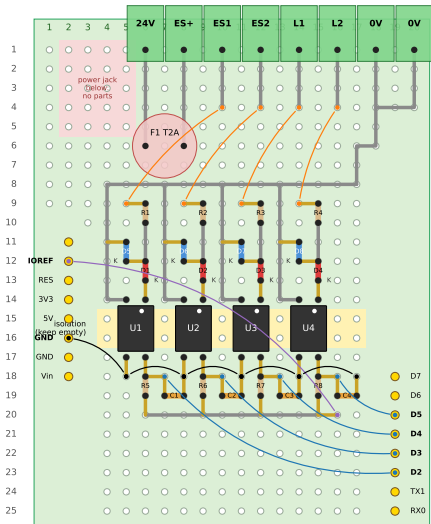

COMPONENT SIDE, USB end of the Arduino at the top. Columns = the numbers printed on the board.

Row 1 = the row next to those numbers. Yellow = solder bridge (solder side).

Grey = bare wire soldered along the pads (solder side). Thin coloured = insulated wire.

Resistors and 1N4148 stand upright in two neighbouring holes; R1-R4 are 1/2 W.

K = cathode (short LED leg, diode band). White dot = PC817 pin 1. Gold = pad joined to a header pin.