


SPECIFICATIONS

Standard	NEMA 23
Step angle	$1.8^{\circ} \pm 5\%$
Current / Phase	2.0A
Voltage / Phase	8.6V
Phase No.	2
Resistance	$4.3 \pm 10\% \Omega$
Insulation resistance	100MOhm (500V DC)
Inductance	$16.2 \pm 20\% \text{mH}$
Insulation class	B
Holding torque	24kgf.cm

DIAGRAM

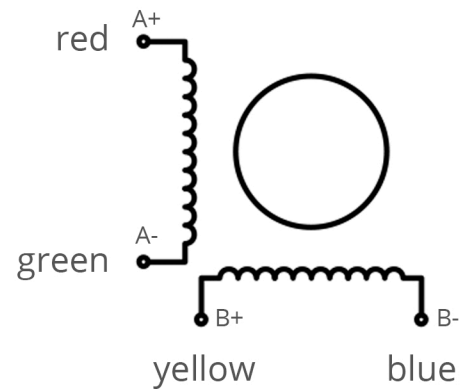

DIMENSIONS

UNIT: mm

