DESCRIPTION

The 100N03 uses advanced trench technology And design to provide excellent $R_{DS(ON)}$ with Low gate charge . It can be used in a wide Vanety of applications .

V_{DS}	$R_{DS(ON)}$	I_D
30V	3.5mΩ	100A



TO-220
Not to Scale

GENERAL FEATURES

- V_{DS} = 30 V, I_D = 100 A
  $R_{DS(ON)}$ < 5.5 mΩ @ V_{GS} = 10 V (Typ:4mΩ)
- High density cell design for ultra low Rdson
- Fully characterized Avalanche voltage and current
- Good stabilty and unifomity with high E_{AS}
- Excellent package for good heat dissipation
- Special process technology for high ESD capability



Application

- Power switching application
- Hard Switched and High Frequency Circuits
- Uninterruptible Power Supply

Ordering Information

PART NUMBER	PACKAGE	BRAND
100N03	TO-220	OGFD

Absolute Maximum Ratings (TC=25℃, unless otherwise noted)

Symbol	Parameter	100N03	Units
V_{DS}	Drain-to-Source Voltage	30	V
I_D	Continuous Drain Current	100	A
	Drain Current-Continuous(Tc=100℃)	70	
I_{DM}	Pulsed Drain Current@VG=10V	400	
P_D	Power Dissipation	180	W
V_{GS}	Gate-to-Source Voltage	± 20	V
E_{AS}	Single PulseAvalanche Energy (L=1mH, IAS=40A)C	350	mJ
T_J and T_{STG}	Operating Junction and Storage Temperature Range	-55 to 175	℃

Thermal Resistance

Symbol	Parameter	Min.	Typ.	Max.	Units	Test Conditions
$R_{\theta JC}$	Junction-to-Case	--	--	0.83	℃/W	Water cooled heatsink, PD adjusted for a peak junction temperature of +175℃.

OFF Characteristics TJ=25℃ unless otherwise specified

Symbol	Parameter	Min.	Typ.	Max.	Units	Test Conditions
B_{VDSS}	Drain-to-Source Breakdown Voltage	30	--	--	V	V_{GS}=0, I_D=250μA
I_{GSS}	Gate-to-Source Forward Leakage	--	--	±100	nA	V_{DS}=0V, V_{GS}=±20V
I_{DSS}	Zero Gate Voltage Drain Current	--	--	1	μA	V_{DS}=30V, V_{GS}=0V

ON Characteristics TJ=25℃ unless otherwise specified

Symbol	Parameter	Min.	Typ.	Max	Units	Test Conditions
$R_{DS(ON)}$	Static Drain-to-Source On-Resistance	--	4.0	5.5	mΩ	V_{GS}=10V,I_D=20A
$V_{GS(TH)}$	Gate Threshold Voltage, Figure 12.	1.0	1.5	3.0	V	V_{DS}=10V, I_D=250μA
G_{fs}	Forward Transconductance	50	---	--	S	V_{DS}=10V, I_D=20A

Dynamic Characteristics Essentially independent of operating temperature

Symbol	Parameter	Min.	Typ.	Max.	Units	Test Conditions
C_{iss}	Input Capacitance	--	3300	--	pF	V_{DS}=25V,V_{GS}=0V, f=1.0MHZ
C_{oss}	Output Capacitance	--	1300	--		
C_{rss}	Reverse Transfer Capacitance	--	200	--		
Q_g	Total Gate Charge	--	100	--	nC	V_{DS}=15V, V_{GS}=5V, I_D=30A
Q_{gs}	Gate-to-Source Charge	--	25	--		
Q_{gd}	Gate-to-Drain (“Miller”) Charge	--	45	--		

Drain-Source Diode Characteristics

Diode Forward Voltage	V_{SD}	V_{GS}=0V,I_S=20A	--	--	1.2	V
Diode Forward Current	I_S	--	--	--	100	A
Reverse Recovery Time	t_{rr}	TJ=25℃,IF=60A Di/dt = 100 A/μs	--	56	--	nS
Reverse Recovery Charge	Q_{rr}		--	110	--	nC
Forword Turn-On Time	t_{on}	Intrinsic turn-on time is negligible (turn-on is dominated by LS+LD				

Notes:

1. Repetitive Rating:Pulse width limited by maximum junction temperature.
2. Surface Mounted on FR4 Board, t ≤10 sec.
3. Pulse Test:Pulse Width ≤ 300μs, Duty Cycle ≤ 2%.
4. Guaranteed by design, not subject to production.
5. EAS condition: Tj=25℃,VDD=100V,VG=10V,L=0.5mH,Rg=25Ω.

Test circuit

1）E_{AS} test Circuits

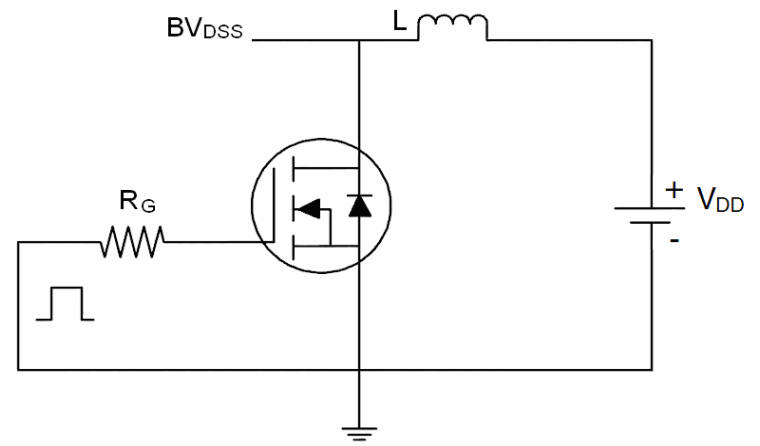

2）Gate charge test Circuit:

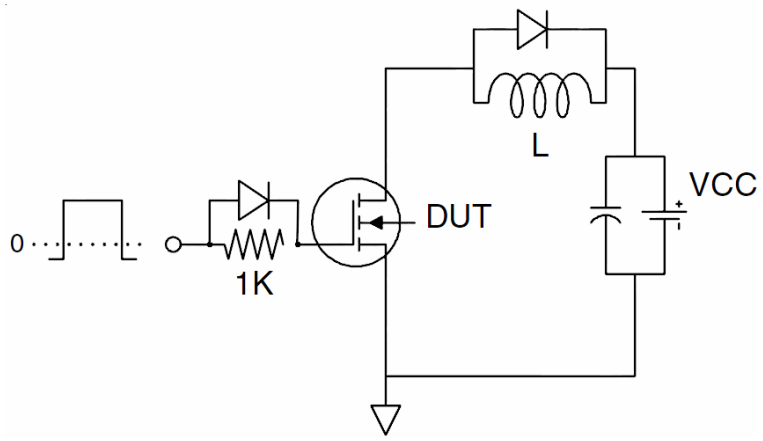

3）Switch Time Test Circuit：

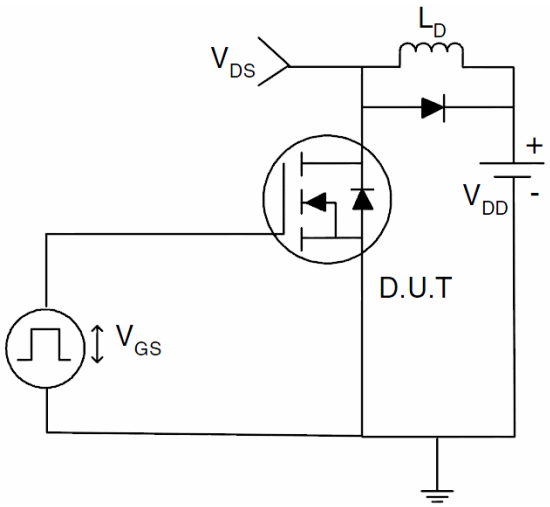

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS (Curves)

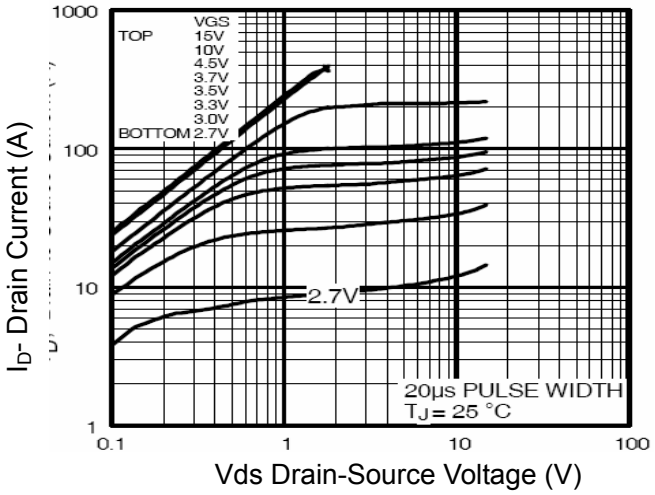

Figure 1 Output Characteristics

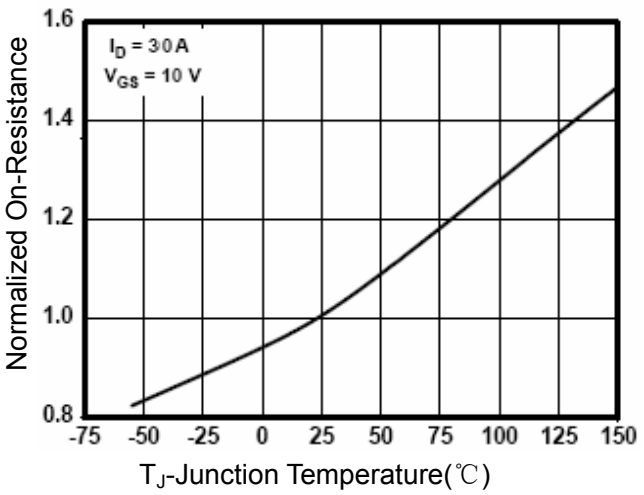

Figure 4 Rdson-JunctionTemperature

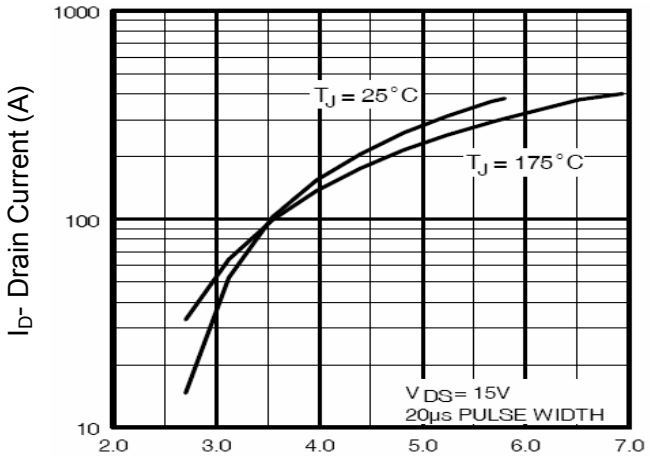

Figure 2 Transfer Characteristics

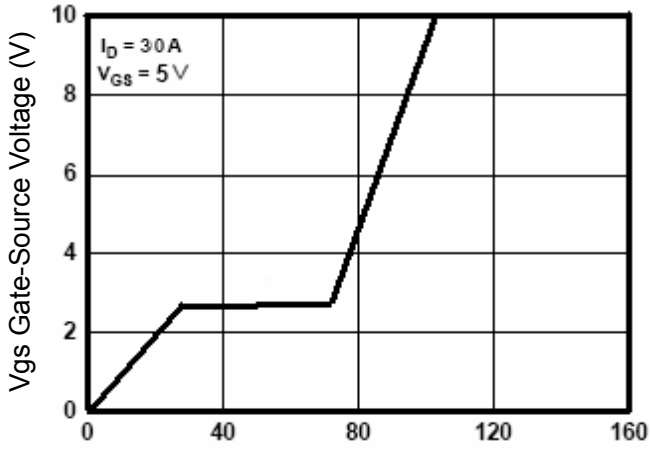

Figure 5 Gate Charge

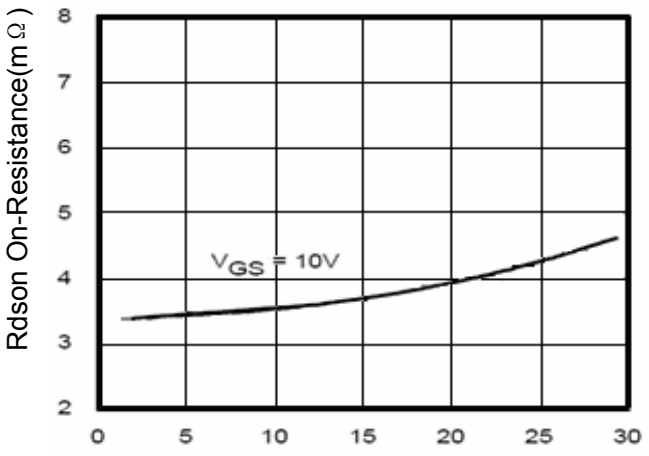

Figure 3 Rdson- Drain Current

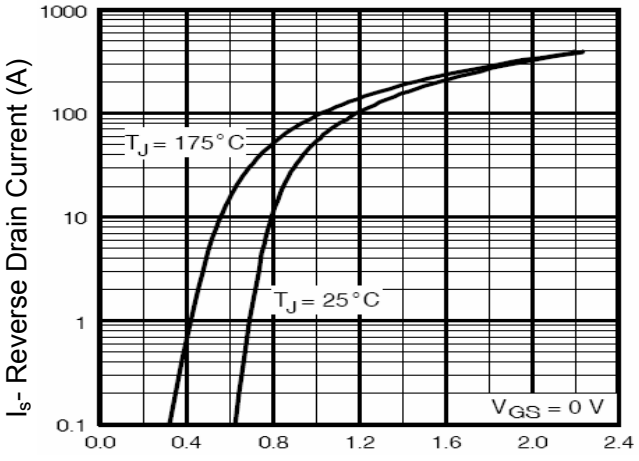

Figure 6 Source- Drain Diode Forward

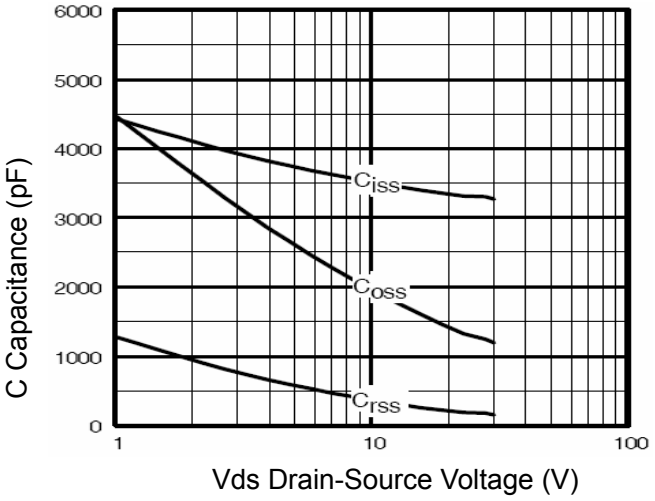

Figure 7 Capacitance vs Vds

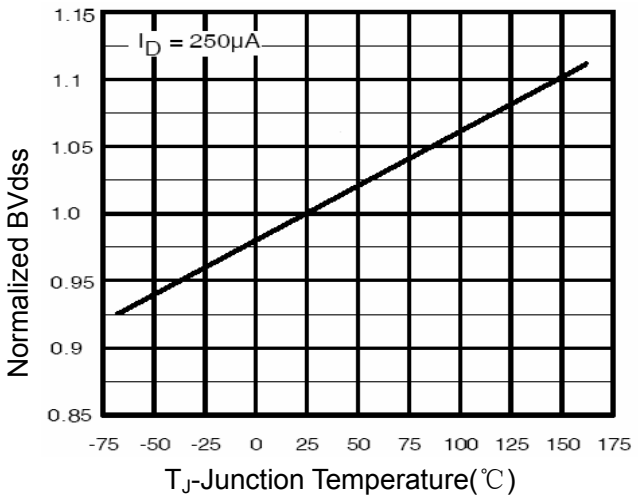

Figure 9 BV_{DSS} vs Junction Temperature

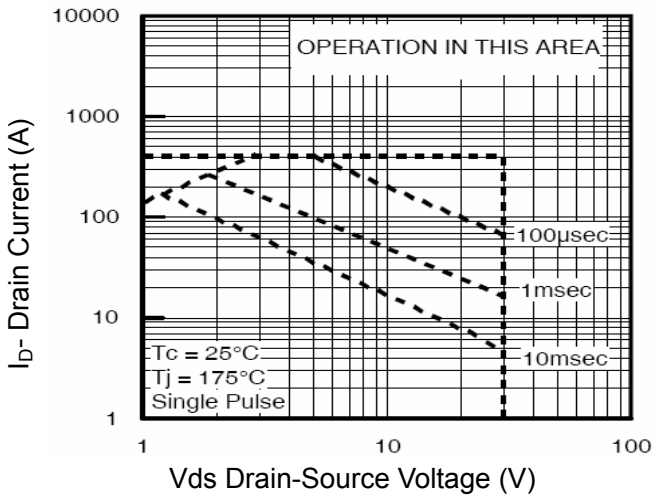

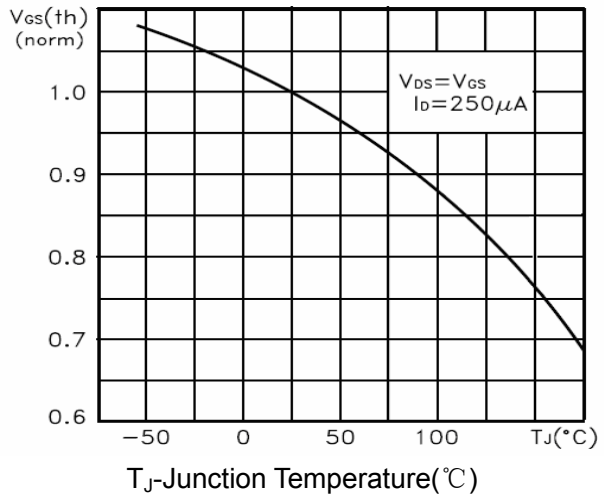

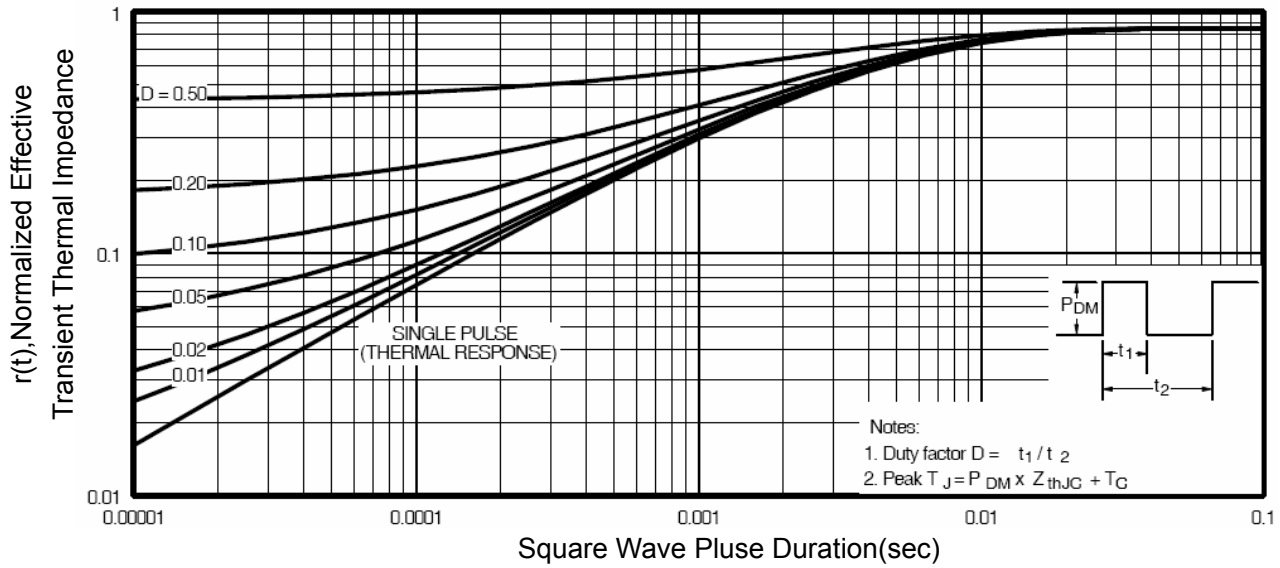

Figure 11 Normalized Maximum Transient Thermal Impedance