




Data Specs

KF7.62 Barrier Terminal Block

7.62mm spacing barrier terminals with side expandable slot. The terminal accepts wire gauge of 22~12AWG. Connectors are available black PA66 material.

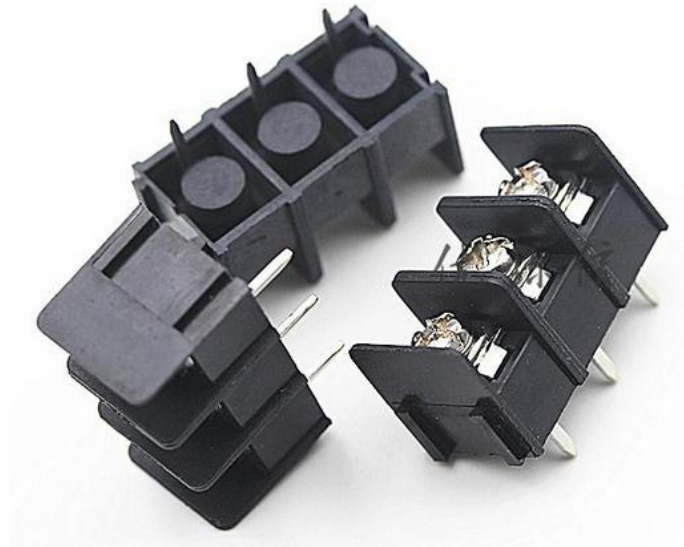


SKU: [CON-1086](#)

Brief Data:

- Voltage Rating: 300V.
- Current Rating: 20A
- Wire Gauge: 22~12 AWG.
- Pin Spacing: 7.62mm (0.300").
- Number of Poles: 2~24 (Stackable)
- Housing Material: PA66UL94V-0.
- Solder Pin: Tinned Brass.
- Screw: M3 Steel Nickel plated.
- Mounting Type: PCB thru-hole.
- Rated impulse voltage: 2KV.

Mechanical Dimension:

Unit: mm

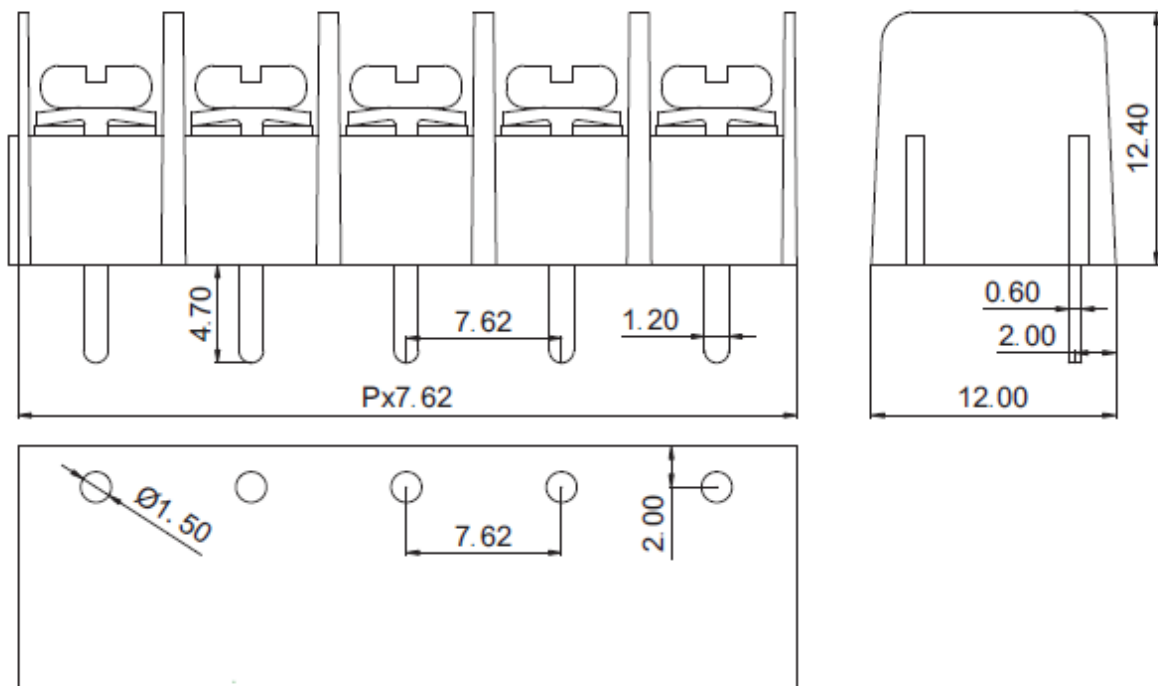

Stackable Application:

