


Multilayer Chip Antenna – SLDA Series

Operating Temp. : -40℃~+85℃



FEATURES

- Light weight, Compact
- Wide bandwidth, Low cost
- Built-in antenna with high gain

APPLICATIONS

- Bluetooth, Wireless LAN, Mobile TV
- Home RF system, etc
- RFID

PRODUCT IDENTIFICATION

<u>SLDA</u>	<u>31</u>	<u>-2R800G</u>	<u>-S1</u>	<u>T</u>	<u>F</u>
①	②	③	④	⑤	⑥
①	②		③		
Type		External Dimensions (L×W) (mm)		Center Frequency	
SLDA	Multilayer Chip Antenna	21	2.0×1.2	Example	Nominal Value
		31	3.2×1.6	2R800G	2800.0MHz
		52	5.2×2.1	2R470G	2470.0MHz
		62	6.0×2.0	0R650G	650.0MHz
		72	7.0×2.0		
		81	8.0×1.0		
		92	9.0×2.0		
		16030	16.0×3.0		
		35050	35.0×5.0		
		50040	50.0×4.0		
④		⑤		⑥	
Series Code		Packing		Hazardous Substance Free Products	
S1, 01, etc.		T Tape & Reel		F	

SHAPE AND DIMENSIONS

Type:	Dimensions (mm)
Land Pattern (mm)	

SHAPE AND DIMENSIONS


Series	A	B	C	D	E	F	G	H	I	J
SLDA21	2.0±0.2	1.25±0.2	0.85±0.2	0.5±0.2	1.3±0.2	1.0±0.2	0.8±0.2	1.0±0.2	1.4	1.3±0.2
SLDA31	3.2±0.2	1.6±0.2	1.2±0.2	0.5±0.2	1.6±0.2	0.8±0.2	0.8±0.2	2.6±0.2	1.4	1.6±0.2
SLDA52	5.2±0.2	2.1±0.2	1.0±0.2	0.5±0.2	2.3±0.2	1.5±0.2	1.0±0.2	4.0±0.2	1.4	2.3±0.2
SDLA62	6.0±0.2	2.0±0.2	1.0±0.2	0.5±0.2	2.2±0.2	1.5±0.2	1.0±0.2	5.0±0.2	1.4	2.2±0.2
SLDA72	7.0±0.2	2.0±0.2	1.0±0.2	0.5±0.2	2.2±0.2	1.5±0.2	1.0±0.2	6.0±0.2	1.4	2.2±0.2
SLDA81	8.0±0.2	1.0±0.2	1.0±0.2	0.5±0.2	1.5±0.2	1.5±0.2	1.0±0.2	7.0±0.2	1.4	1.5±0.2
SLDA92	9.0±0.2	2.0±0.2	1.0±0.2	0.5±0.2	2.2±0.2	1.5±0.2	1.0±0.2	8.0±0.2	1.4	2.2±0.2
SLDA16030	16.0±0.4	3.0±0.2	2.0±0.2	0.5±0.2	3.2±0.2	1.5±0.2	1.0±0.2	15.0±0.2	1.4	3.2±0.2
SLDA35050	35.0±0.2	5.0±0.2	1.0±0.2	1.0±0.2	5.2±0.2	1.5±0.2	1.0±0.2	33.0±0.2	1.4	5.2±0.2
SLDA50040	50.0±0.5	4.0±0.5	1.0±0.2	1.0±0.2	4.2±0.2	1.5±0.2	1.0±0.2	48.0±0.2	1.4	4.2±0.2

TERINAL-CONFIGURATION


(1)  (2)

No.	Terminal Name	No.	Terminal Name
(1)	Feeding Point	(2)	NC

EVALUATION BOARD

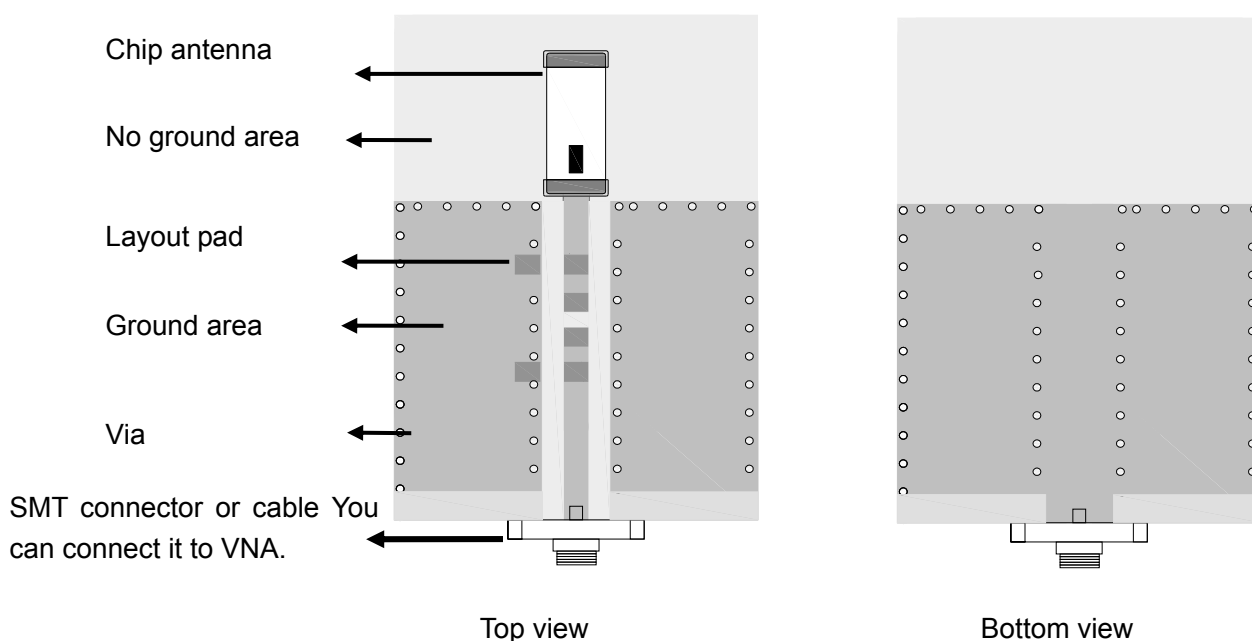

APPLICATION GUIDE

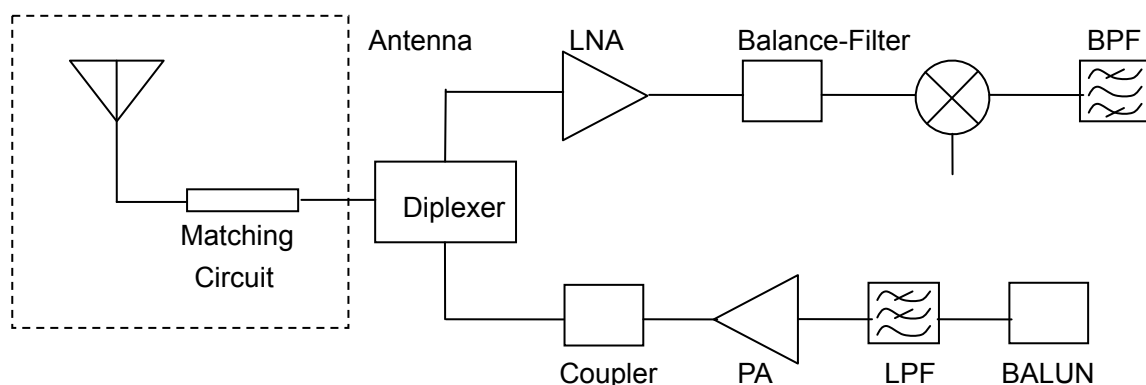

Sunlord

Specifications subject to change without notice. Please check our website for latest information. Revised 2011/03/15

Sunlord Industrial Park, Dafuyuan Industrial Zone, Guanlan, Shenzhen, China 518110 Tel: 0086-755-29832660 Fax: 0086-755-82269029 E-Mail: sunlord@sunlordinc.com

SPECIFICATIONS

SLDA21 TYPE

Part Number	Band Width	Peak Gain	Average Gain	VSWR	Impedance	Power Capacity
	MHz	V-XZ	V-XZ	In BW	Ω	W
SLDA21-2R450G-S1TF	≥ 100	-3.0dBi Typ.	-8.0dBi Typ.	< 2.5	50	3

SLDA31 TYPE

Part Number	Band Width	Peak Gain	Average Gain	VSWR	Impedance	Power Capacity
	MHz	V-XZ	V-XZ	In BW	Ω	W
SLDA31-2R800G-S1TF	≥ 100	0.5dBi Typ.	-1dBi Typ.	< 2	50	3

SLDA52 TYPE

Part Number	Band Width	Peak Gain	Average Gain	VSWR	Impedance	Power Capacity
	MHz	V-XZ	V-XZ	In BW	Ω	W
SLDA52-2R350G-S1TF	≥ 150	2.5dBi Typ.	0.5dBi Typ.	< 2	50	3
SLDA52-2R510G-S1TF	≥ 200	2.5dBi Typ.	0.5dBi Typ.	< 2	50	
SLDA52-2R540G-S1TF	≥ 200	2.5dBi Typ.	0.5dBi Typ.	< 2	50	
SLDA52-2R710G-S1TF	≥ 200	2.5dBi Typ.	0.5dBi Typ.	< 2	50	
SLDA52-2R780G-S1TF	≥ 200	2.5dBi Typ.	0.5dBi Typ.	< 2	50	

SLDA62 TYPE

Part Number	Band Width	Peak Gain	Average Gain	VSWR	Impedance	Power Capacity
	MHz	V-XZ	V-XZ	In BW	Ω	W
SLDA62-2R640G-01TF	≥ 200	2.6dBi Typ.	0.7dBi Typ.	< 2	50	3

SLDA72 TYPE

Part Number	Band Width	Peak Gain	Average Gain	VSWR	Impedance	Power Capacity
	MHz	V-XZ	V-XZ	In BW	Ω	W
SLDA72-2R470G-S1TF	≥ 200	2.7dBi Typ.	1.0dBi Typ.	< 2	50	3
SLDA72-2R860G-02TF	≥ 200	2.7dBi Typ.	1.0dBi Typ.	< 2	50	

SLDA81 TYPE

Part Number	Band Width	Peak Gain	Average Gain	VSWR	Impedance	Power Capacity
	MHz	V-XZ	V-XZ	In BW	Ω	W
SLDA81-3R010G-S1TF	≥ 200	2.0dBi Typ.	0.5dBi Typ.	< 2	50	3

SLDA92 TYPE

Part Number	Band Width	Peak Gain	Average Gain	VSWR	Impedance	Power Capacity
	MHz	V-XZ	V-XZ	In BW	Ω	W
SLDA92-2R660G-S1TF	≥ 200	3.0dBi Typ.	1.0dBi Typ.	< 2	50	3

SLDA16030 TYPE

Part Number	Band Width	Peak Gain		VSWR	Impedance	Power Capacity
	MHz	V-XZ		In BW	Ω	W
SLDA16030-0R433G-S1TF	≥ 20	3.0dBi Typ.	1.0dBi Typ.	< 2	50	3

SPECIFICATIONS

SLDA35050 TYPE

Part Number	Band Width	Peak Gain		VSWR	Impedance	Power Capacity
	MHz	V-XZ		In BW	Ω	W
SLDA35050-0R650G-S1TF	≥ 50	-2.0dBi Typ. (710MHz)	-7.0dBi Typ. (474MHz)	<3	50	3


SLDA50040 TYPE

Part Number	Band Width	Peak Gain		VSWR	Impedance	Power Capacity
	MHz	V-XZ		In BW	Ω	W
SLDA50040-0R650G-S1TF	474-862	-6.0 dBi (862 MHz).	-3.0 dBi (474 MHz)	<5	50	3


※Frequency will be changed with layout of PCB. Please contact us for appropriate design.

RETURN LOSS


SLDA21-2R450G-S1TF

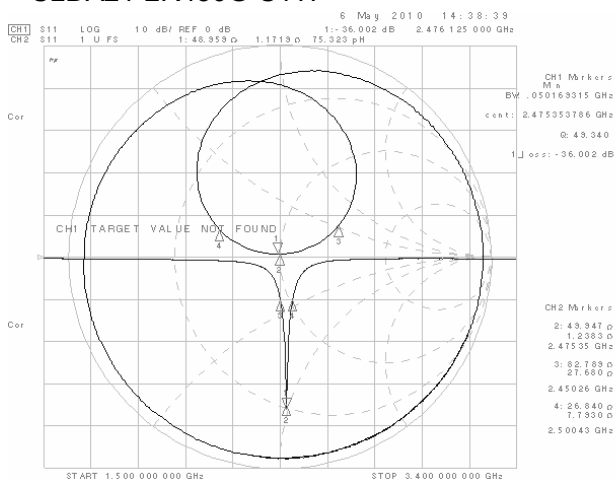


SLDA31-2R800G-S1TF

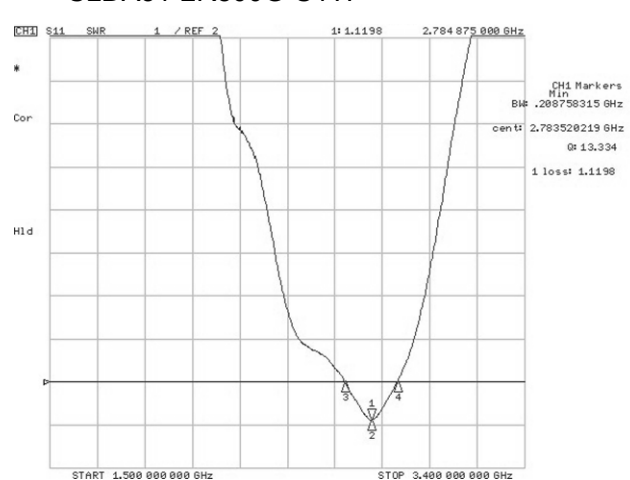

SLDA52-2R350G-S1TF

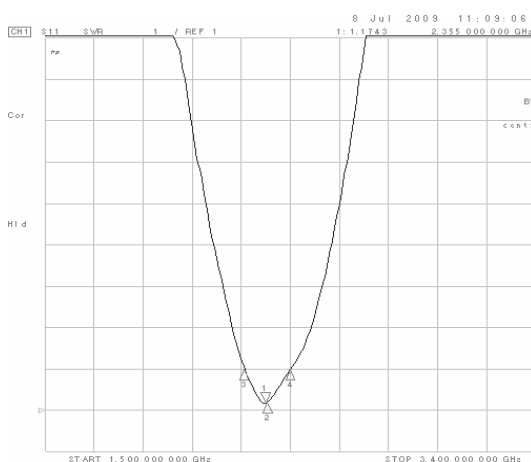


SLDA52-2R510G-S1TF

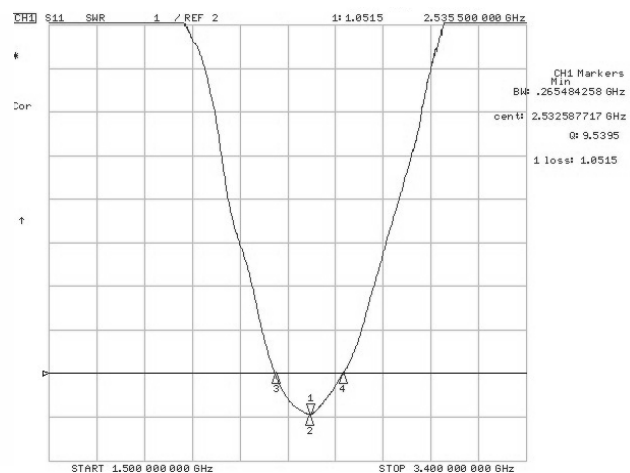


RETURN LOSS


SLDA52-2R540G-S1TF

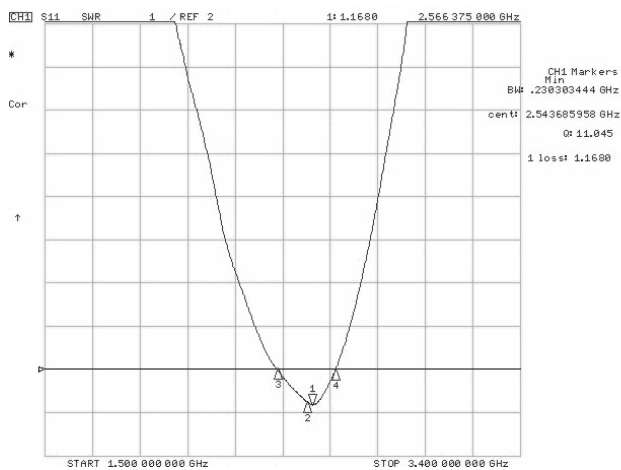


SLDA52-2R710G-S1TF

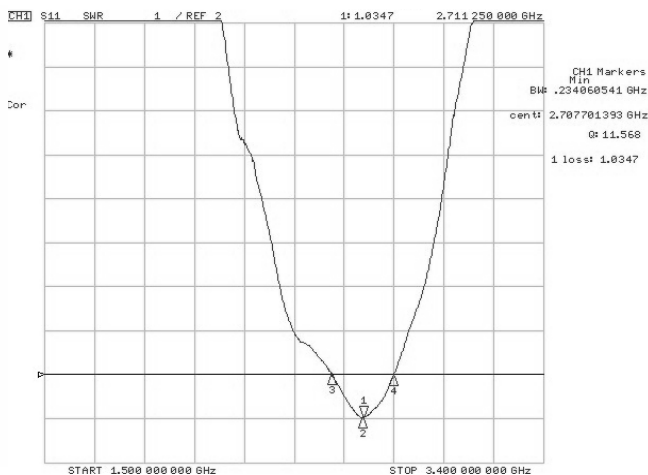


SLDA52-2R780G-S1TF

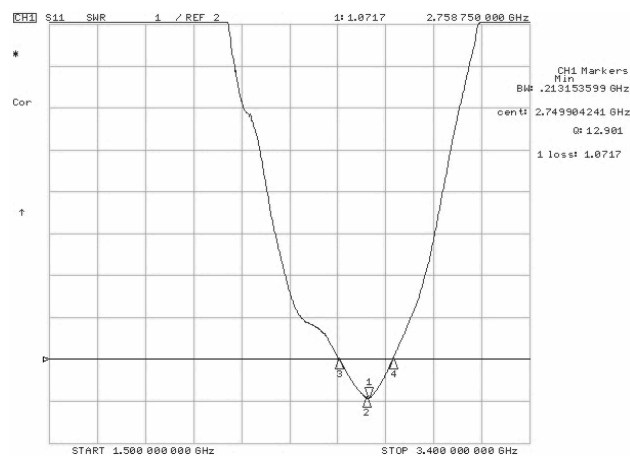


SLDA62-2R640G-01TF

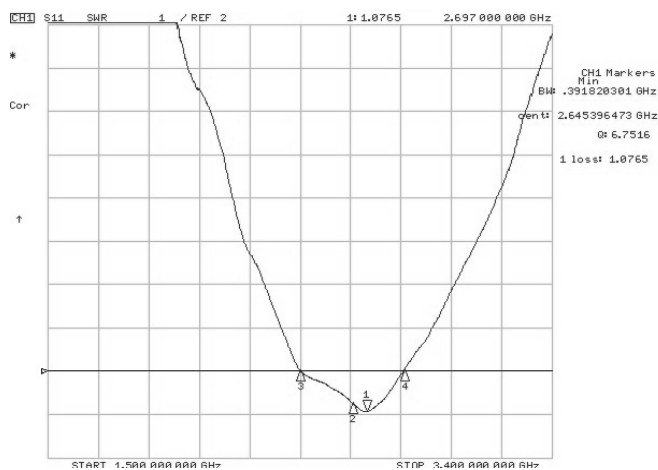

SLDA72-2R470G-S1TF

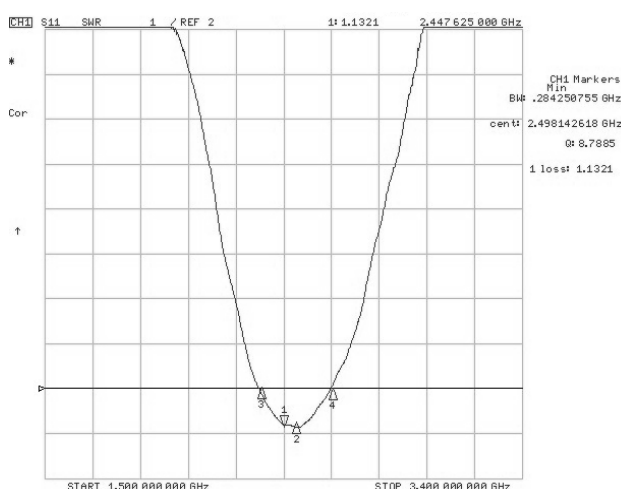


SLDA72-2R860G-S1TF

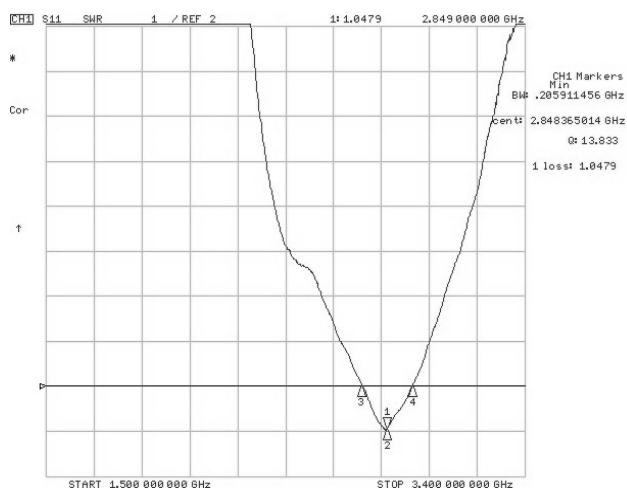


RETURN LOSS


SLDA81-3R010G-S1TF

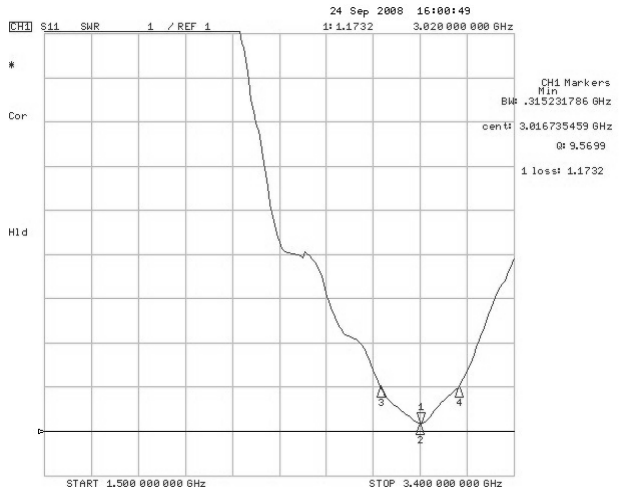


SLDA92-2R660G-S1TF

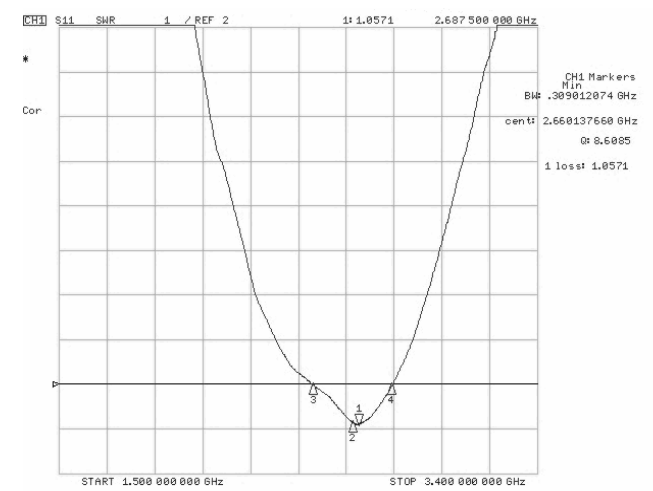

SLDA16030-0R433G-S1TF

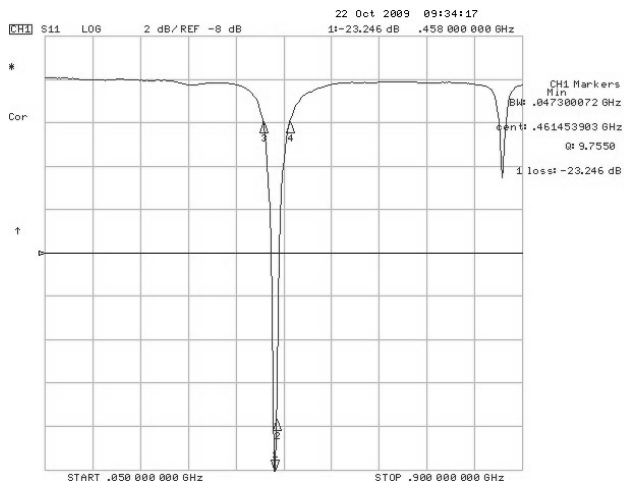

SLDA35050-0R650G-S1TF

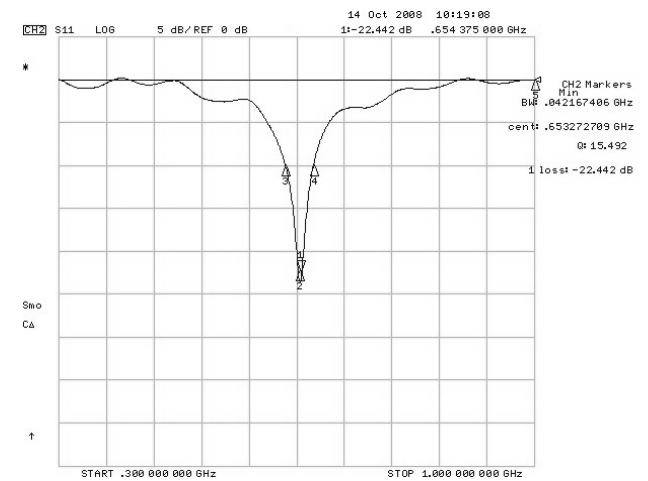

SLDA50040-0R650G-S1TF

