




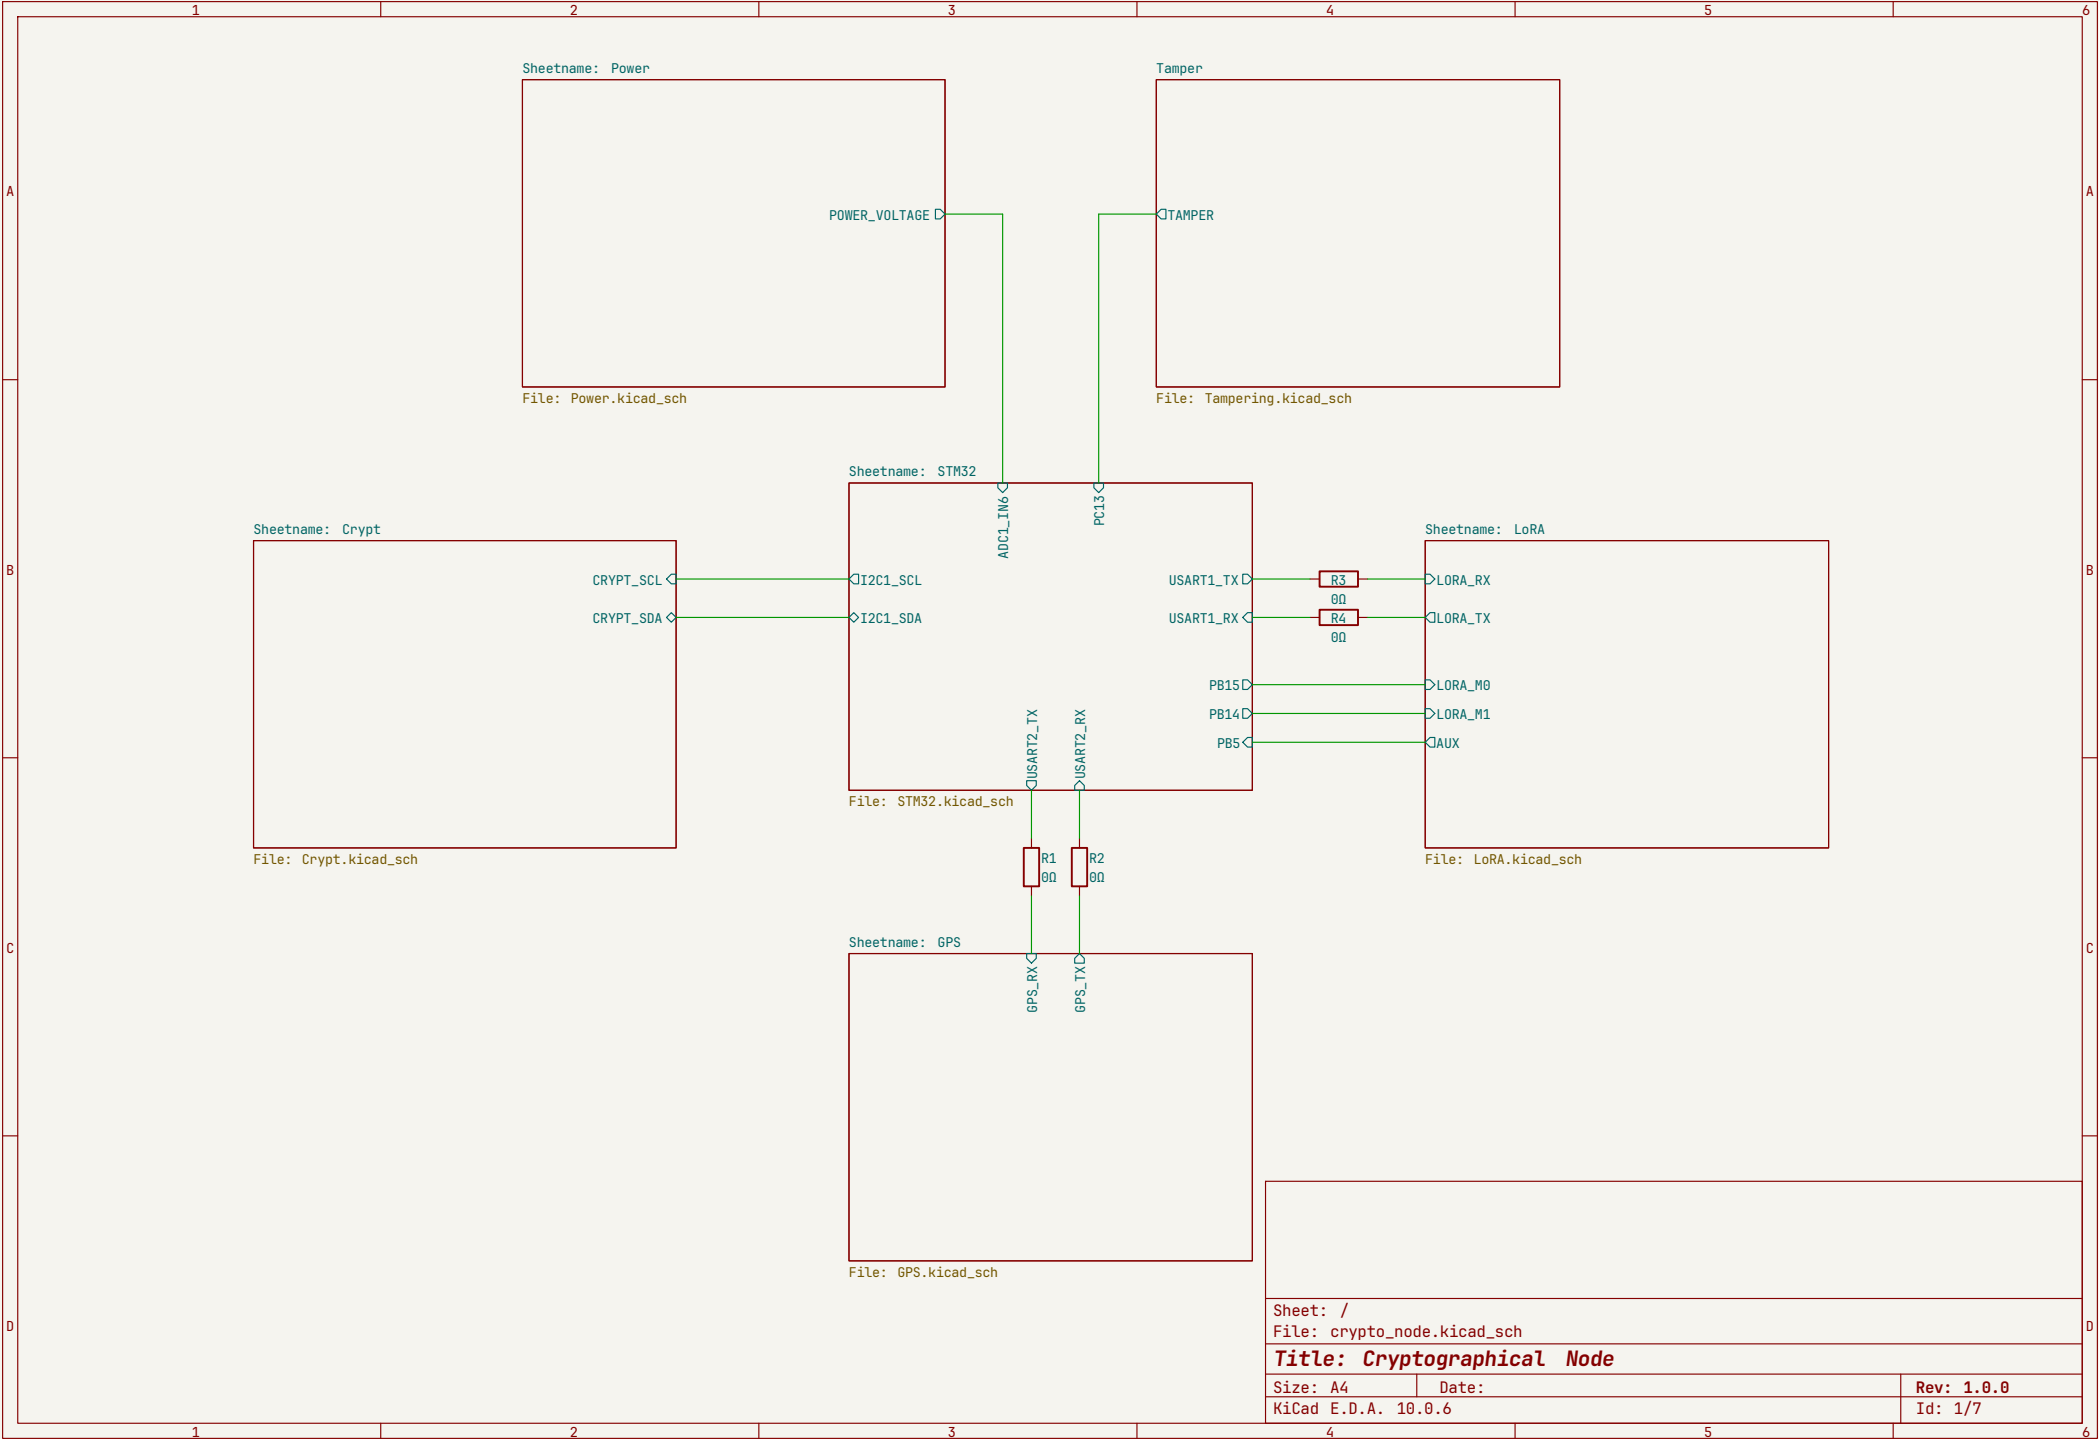


BATTERY (1S Li-Po)




POLARITY & PROTECTION

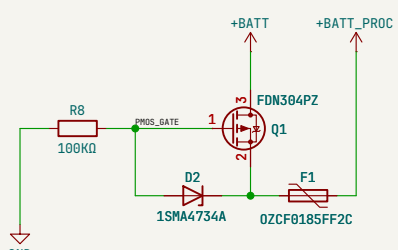


SWITCHING & VOLTAGE MONITORING

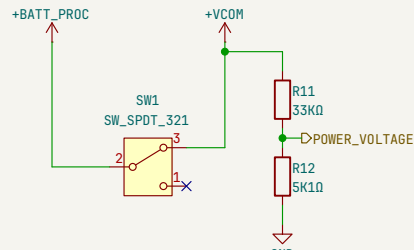


STM32 LDO

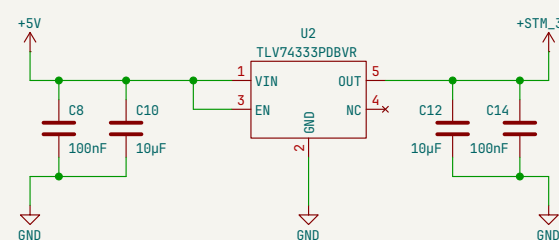



USB (POWER ONLY)

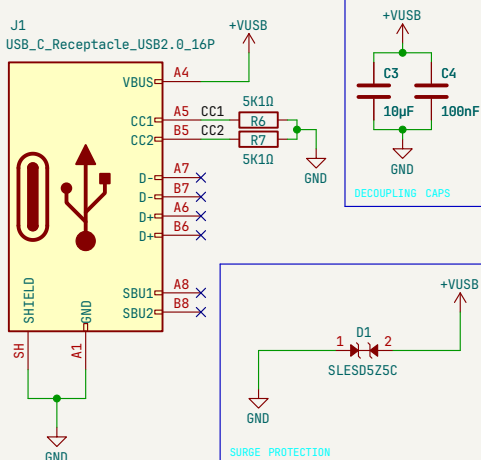

CRYPT LDO

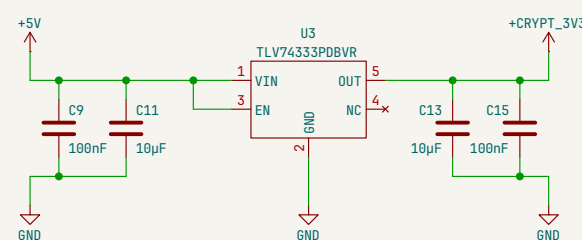

BUCK CONVERTER 5V

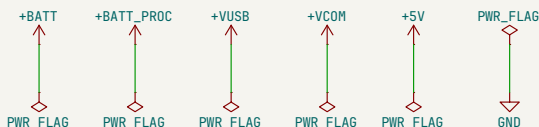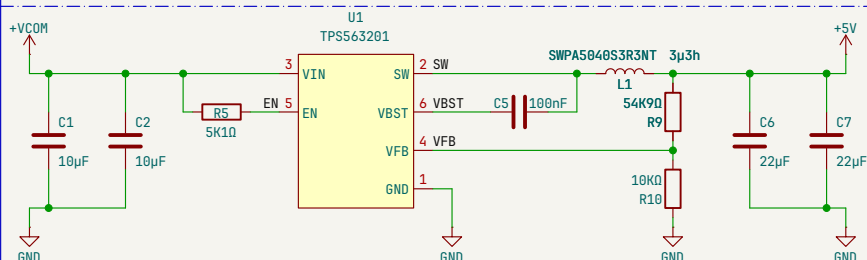


Sheet: /Power/
File: Power.kicad_sch


Title:

Size: A4
KiCad E.D.A. 10.0.6

Date:

Rev:
Id: 2/7

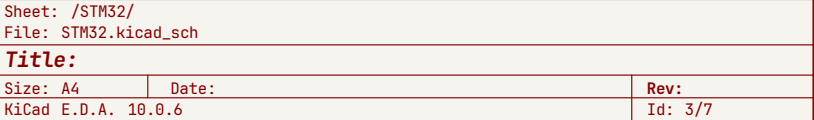

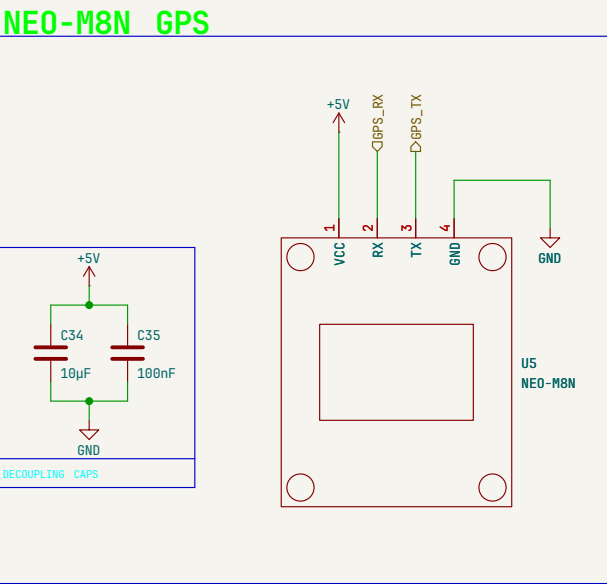

Sheet: /GPS/ File: GPS.kicad_sch		
Title:		
Size: A5	Date:	Rev:
KiCad E.D.A. 10.0.6		Id: 4/7

SE050C1HQ1 CRYPT IC

The schematic diagram illustrates the pin configuration and power supply connections for the SE050C1HQ1 Crypt IC. The chip is shown as a red rectangle with pins numbered 1 through 21.

Pin Connections:

- VIN (12):** Connected to +CRYPT_3V3.
- ENA (11):** Connected to +CRYPT_3V3.
- VOUT (15):** Not connected (marked with an X).
- VCC (18):** Connected to +CRYPT_3V3.
- I2C_SDA (9):** Connected to CRYPT_SDA.
- I2C_SCL (10):** Connected to CRYPT_SCL.
- SS (19):** Connected to GND.
- EP (21):** Connected to GND.
- IS014443_LA (17):** Connected to GND.
- IS014443_LB (1):** Connected to GND.
- ISO7816_RST (14):** Connected to GND.
- ISO7816_IO1 (3):** Not connected (marked with an X).
- ISO7816_IO2 (16):** Not connected (marked with an X).
- ISO7816_CLK (13):** Not connected (marked with an X).


Decoupling Capacitors:

- C36 (10µF):** Connected between VIN (12) and GND.
- C37 (100nF):** Connected between VCC (18) and GND.

Legend:

- DECOUPLING CAPS

Title:		
Size: A5	Date:	Rev:
KiCad E.D.A. 10.0.6		Id: 5/7

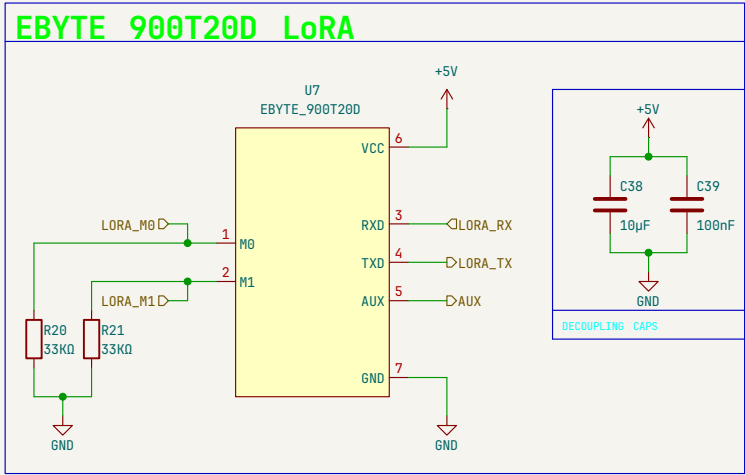

Sheet: /LoRA/
File: LoRA.kicad_sch

Title:


Size: A5

Date:

KiCad E.D.A. 10.0.6

Rev:

Id: 6/7

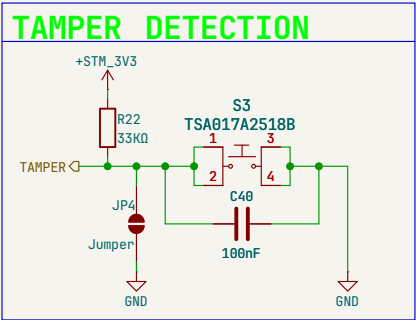

Sheet: /Tamper/		
File: Tampering.kicad_sch		
Title:		
Size: A5	Date:	Rev:
KiCad E.D.A. 10.0.6		Id: 7/7