




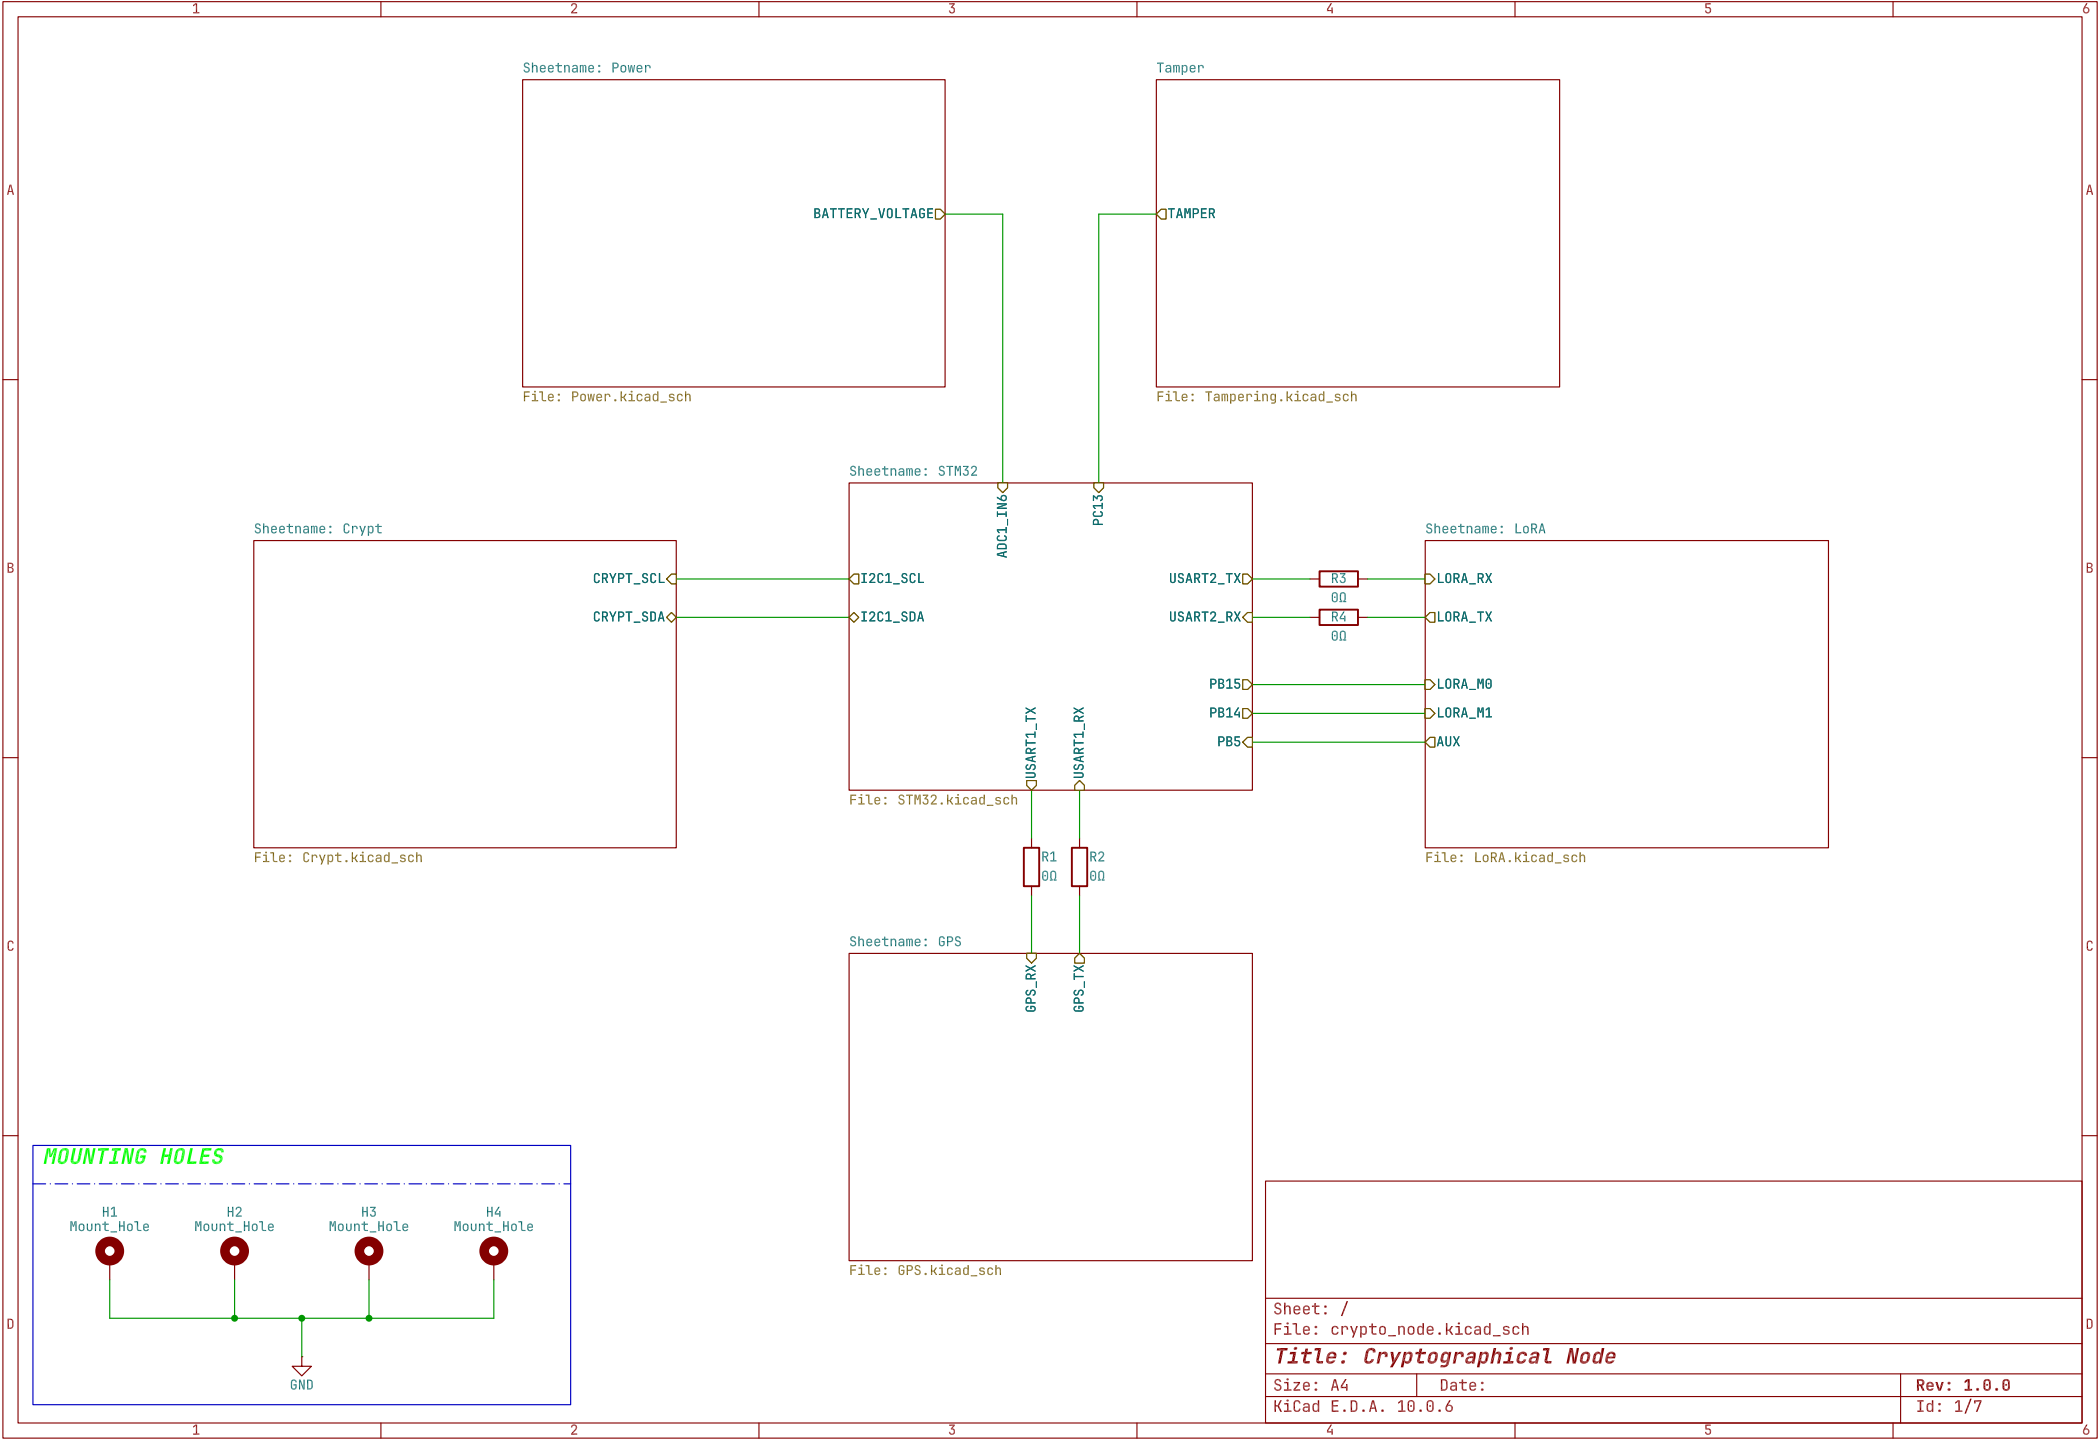


BATTERY (1S Li-Po)




POLARITY & PROTECTION

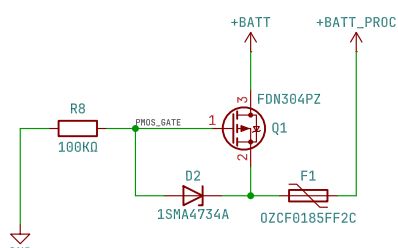


SWITCHING & VOLTAGE MONITORING

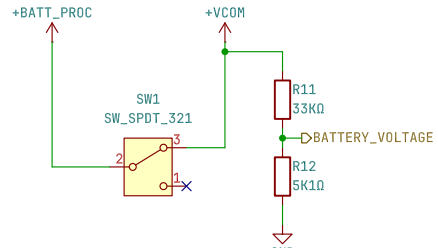


STM32 LDO

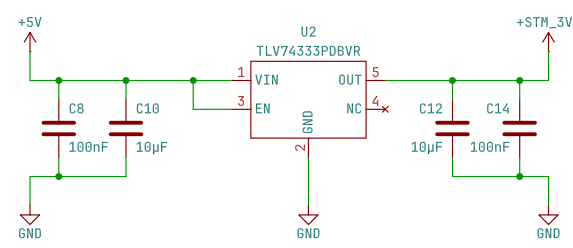



USB (POWER ONLY)

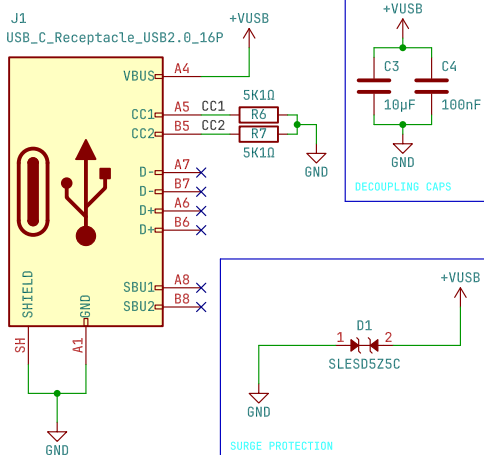

CRYPT LDO

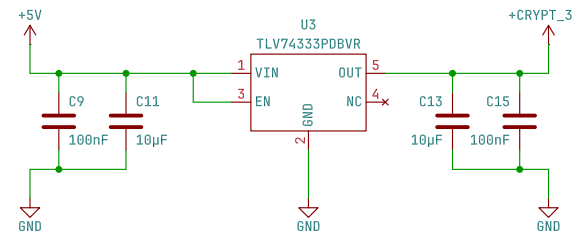

BUCK CONVERTER 5V

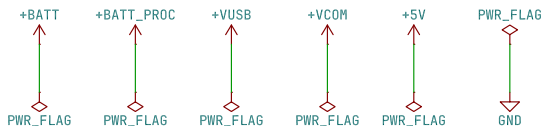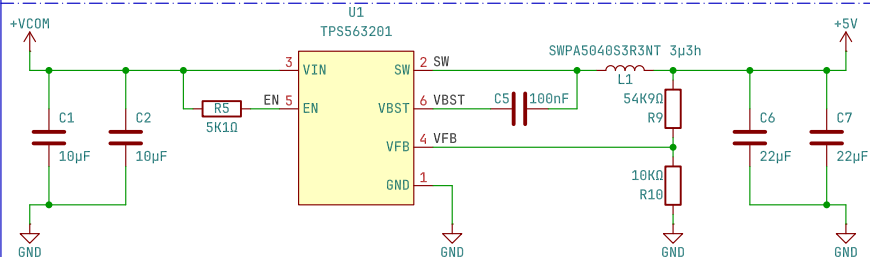


Sheet: /Power/
File: Power.kicad_sch

Title:


Size: A4
KiCad E.D.A. 10.0.6

Date:


Rev:
Id: 2/7

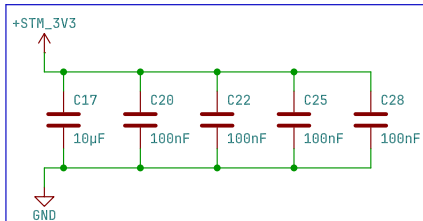


DECOUPLING CAPS

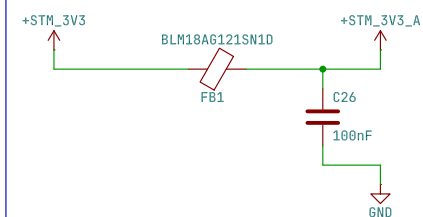


ANALOG FILTERING

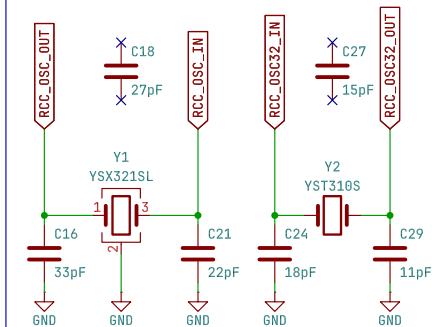



HSE CRYSTAL

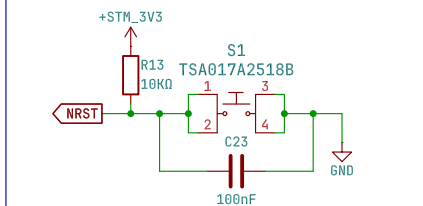


RESET TACTILE SWITCH

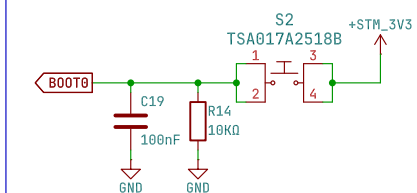


BOOT TACTILE SWITCH

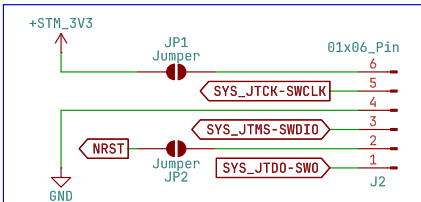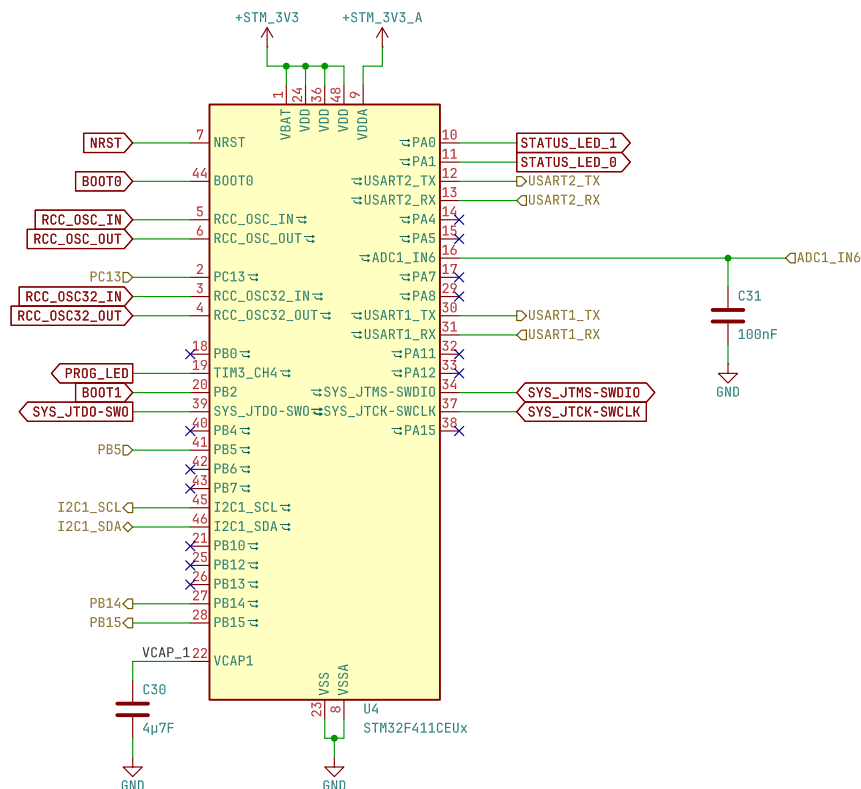


ST-LINK DEBUGGER AND FLASHING

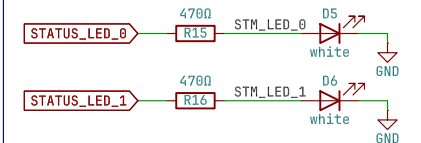


BUILT-IN LED

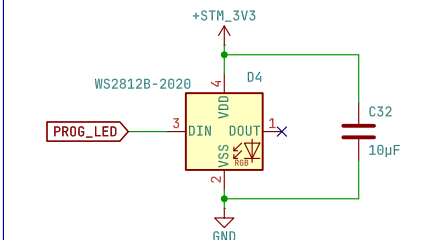

PROGRAMABLE RGB LED

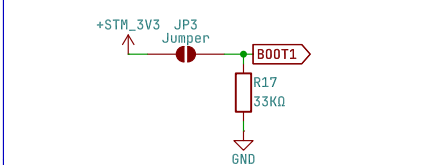

BOOT1 SELECTOR




Sheet: /STM32/
File: STM32.kicad_sch

Title:

Size: A4	Date:
----------	-------

KiCad E.D.A. 10.0.6

Rev:
Id: 3/7

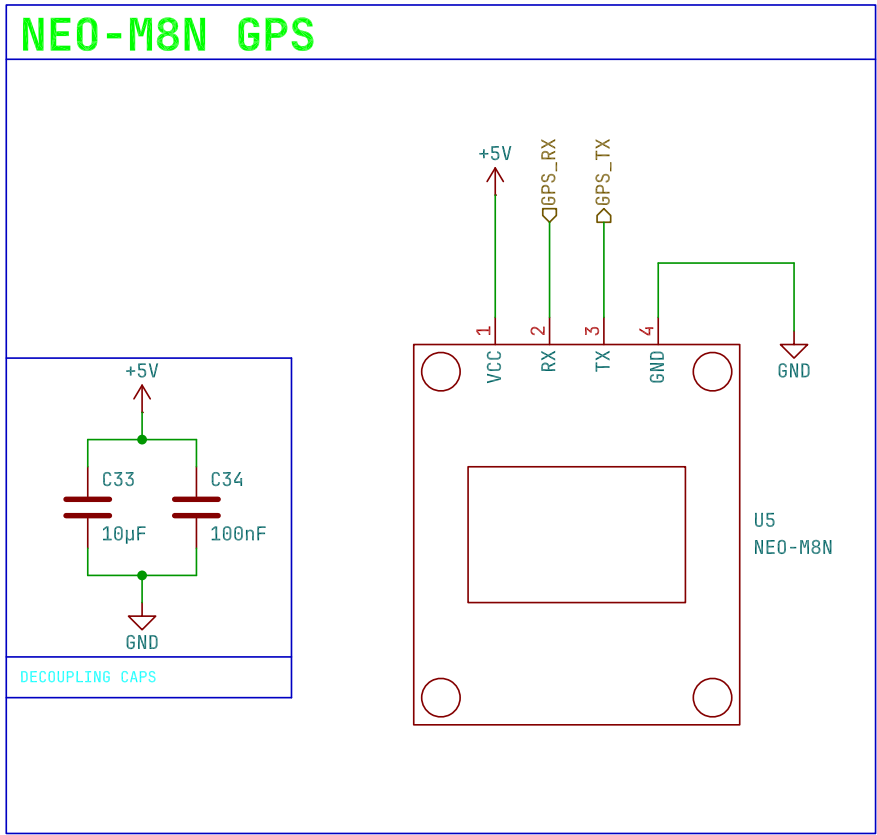

Sheet: /GPS/ File: GPS.kicad_sch		
Title:		
Size: A5	Date:	Rev:
KiCad E.D.A. 10.0.6		Id: 4/7

SE050C1HQ1 CRYPT IC

The diagram shows the SE050C1HQ1 CRYPT IC (U6) and its decoupling capacitors. The IC is a square package with pins 1 through 21. The pin connections are as follows:

- Pin 1: IS014443_LB
- Pin 3: IS07816_I01
- Pin 6: IS07816_I02
- Pin 7: IS07816_CLK
- Pin 9: I2C_SDA
- Pin 10: I2C_SCL
- Pin 11: ENA
- Pin 12: VIN
- Pin 13: VSS
- Pin 14: IS07816_RST
- Pin 15: VOUT
- Pin 16: VCC
- Pin 17: IS014443_LA
- Pin 18: VCC
- Pin 19: VSS
- Pin 20: EP
- Pin 21: EP

The IC is connected to a +CRYPT_3V3 supply. The VIN pin (12) is connected to +CRYPT_3V3. The ENA pin (11) is connected to +CRYPT_3V3. The VCC pin (16) is connected to +CRYPT_3V3. The VSS pin (13) is connected to GND. The I2C_SDA pin (9) is connected to CRYPT_SDA. The I2C_SCL pin (10) is connected to CRYPT_SCL. The VOUT pin (15) is connected to +CRYPT_3V3. The IS07816_RST pin (14) is connected to GND. The IS07816_I01 pin (3) is connected to GND. The IS07816_I02 pin (6) is connected to GND. The IS07816_CLK pin (7) is connected to GND. The IS014443_LB pin (1) is connected to GND. The IS014443_LA pin (17) is connected to GND. The VSS pin (13) is connected to GND. The EP pin (20) is connected to GND. The EP pin (21) is connected to GND.

The decoupling capacitors are shown in a separate box labeled "DECOUPLING CAPS". The +CRYPT_3V3 supply is connected to the VIN pin (12) and the ENA pin (11). The VIN pin (12) is connected to the +CRYPT_3V3 supply. The ENA pin (11) is connected to the +CRYPT_3V3 supply. The VCC pin (16) is connected to the +CRYPT_3V3 supply. The VSS pin (13) is connected to GND. The I2C_SDA pin (9) is connected to CRYPT_SDA. The I2C_SCL pin (10) is connected to CRYPT_SCL. The VOUT pin (15) is connected to +CRYPT_3V3. The IS07816_RST pin (14) is connected to GND. The IS07816_I01 pin (3) is connected to GND. The IS07816_I02 pin (6) is connected to GND. The IS07816_CLK pin (7) is connected to GND. The IS014443_LB pin (1) is connected to GND. The IS014443_LA pin (17) is connected to GND. The VSS pin (13) is connected to GND. The EP pin (20) is connected to GND. The EP pin (21) is connected to GND.

The decoupling capacitors are C35 (10μF) and C36 (100nF). C35 is connected between +CRYPT_3V3 and GND. C36 is connected between +CRYPT_3V3 and GND.

Title:		
Size: A5	Date:	Rev:
KiCad E.D.A. 10.0.6		Id: 5/7


Size: A5	Date:	Rev:
----------	-------	------

KiCad E.D.A. 10.0.6	Id: 5/7
---------------------	---------


Date:	Rev:
-------	------

Rev:

Id: 5/7

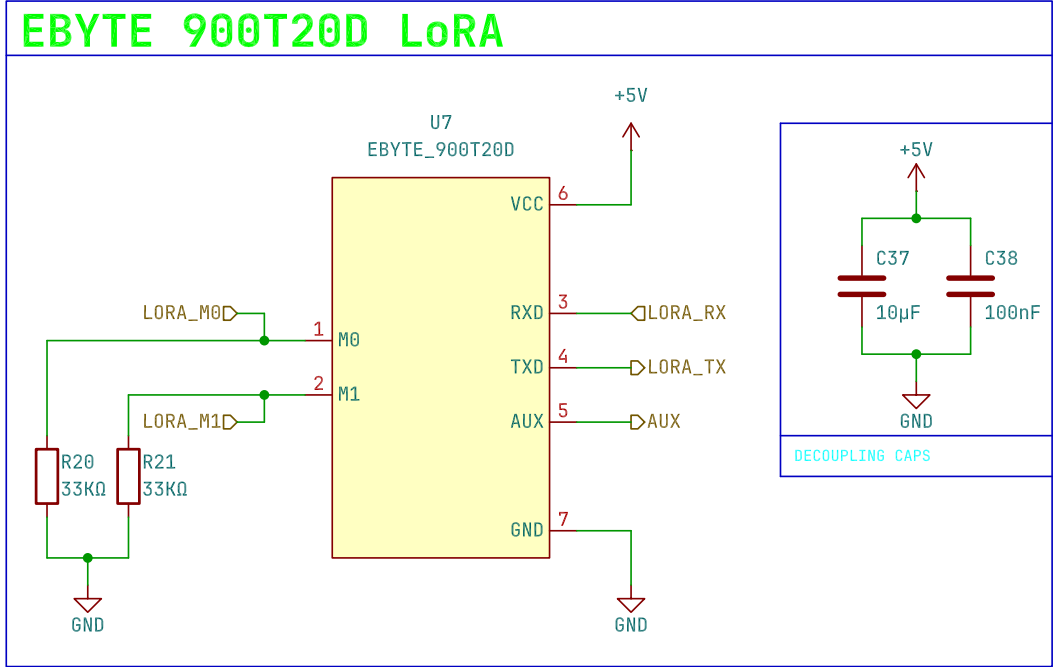

Sheet: /LoRA/ File: LoRA.kicad_sch		
Title:		
Size: A5	Date:	Rev:
KiCad E.D.A. 10.0.6		Id: 6/7

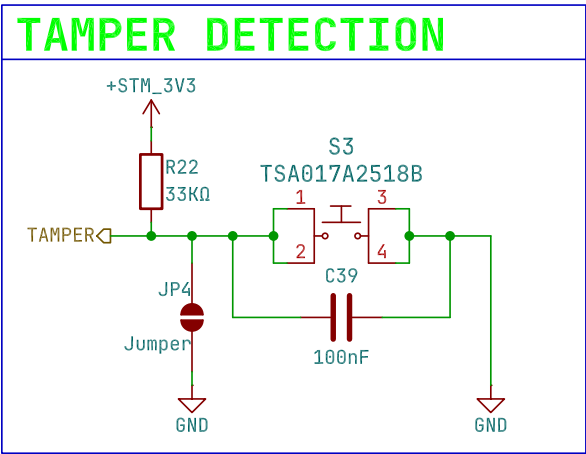

Sheet: /Tamper/ File: Tampering.kicad_sch		
Title:		
Size: A5	Date:	Rev:
KiCad E.D.A. 10.0.6	Id: 7/7	