



Battery Cell and Pack Specification

ENS-D10

DISCLAIMER

While every precaution has been taken in the preparation of this document, Envision Energy Co., Ltd (hereinafter refers to as “Envision Energy”) assumes no liability with respect to the operation or use of Envision Energy products and documentation described herein.

Envision Energy shall not be liable for any act or omission concerning the products or documentation, interruption of service, loss or interruption of business, loss of anticipatory profits, or punitive, incidental, or consequential damages in connection with the furnishing, performance, or any use of Envision Energy products or documentations provided herein.

Please use the latest version of the applicable specifications. Figures of this documentation do not necessarily reflect the exact scope of supply. The actual scope of supply is subject to technical alterations at any time.

CONTENTS

1.	BATTERY CELL SPECIFICATION	1
2.	BATTERY PACK SPECIFICATION	2
3.	BATTERY PACK GENERAL ARRANGEMENT	3
3.	STORAGE REQUIREMENTS.....	4

1. BATTERY CELL SPECIFICATION

The battery cell implements optimized lithium iron phosphate (LFP) chemistry with improvements made on safety, cycle life, and energy density. The optimized electrodes, precise process control, and stringent quality protocol ensure the delivery of superior energy density while maintaining thermal stability and structural strength during mass production.

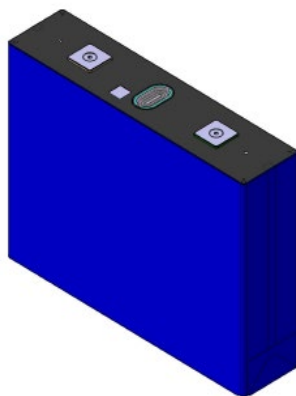


Figure 1. 3D rendering of battery cell

The basic parameters of the battery cell are provided in the table below.

Table 1. General specification: battery cell

Items	Parameters
Chemical Platform	LFP
Capacity	755 Ah
C-Rate	$\leq 0.25P$
Nominal Voltage	3.2 V
Voltage Range	2.5 – 3.65 V
Cycle life	≥ 10000 Cycles
Energy Efficiency	95.5%
Storage Temperature	-40 to 60 °C
Operating Temperature	Charge: 0 to 60 °C Discharge: -30 to 60 °C
Dimensions (L x T x H)	321 mm x 75.2 mm x 241.3 mm
Weight	$13.1 \pm 0.5\text{kg}$
Self-discharge Rate	$\leq 2.0\%$ per month at 30% SOC

2. BATTERY PACK SPECIFICATION

The battery pack design is optimized for energy density, mechanical-thermal coupling properties, and maintainability. Each battery pack is integrated with 104 battery cells in a 1P104S configuration.

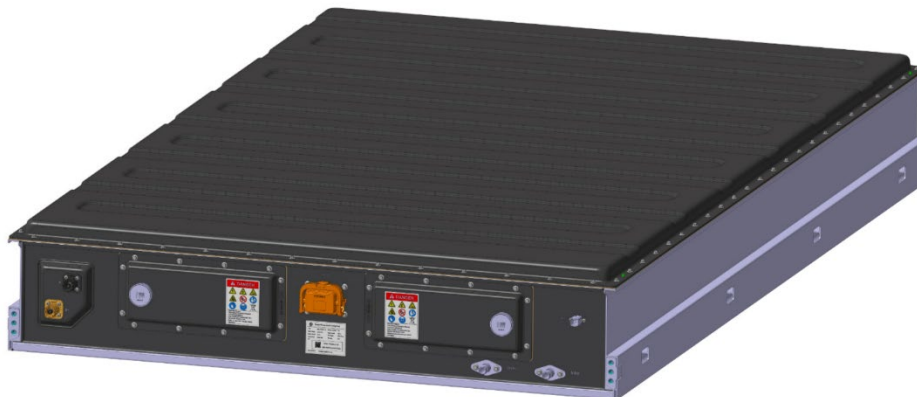


Figure 2. 3D Rendering of battery pack

The basic parameters of the pack are provided in the table below.

Table 2. General specification: battery pack

Items	Parameters
Pack Configuration	1P104S
Nominal Voltage	332.8 V
Voltage Range	291.2V - 374.4 V
Energy Capacity	251.3 kWh
Weight	1500 ± 22 kg
Dimensions (L x W x H)	2226 mm x 1385 mm x 285 mm
Energy Density	167.5 Wh/kg
Operating Temperature	-30 to 60°C

3. BATTERY PACK GENERAL ARRANGEMENT

The following three-view drawing illustrates the specific interfaces and physical dimensions of the battery pack.

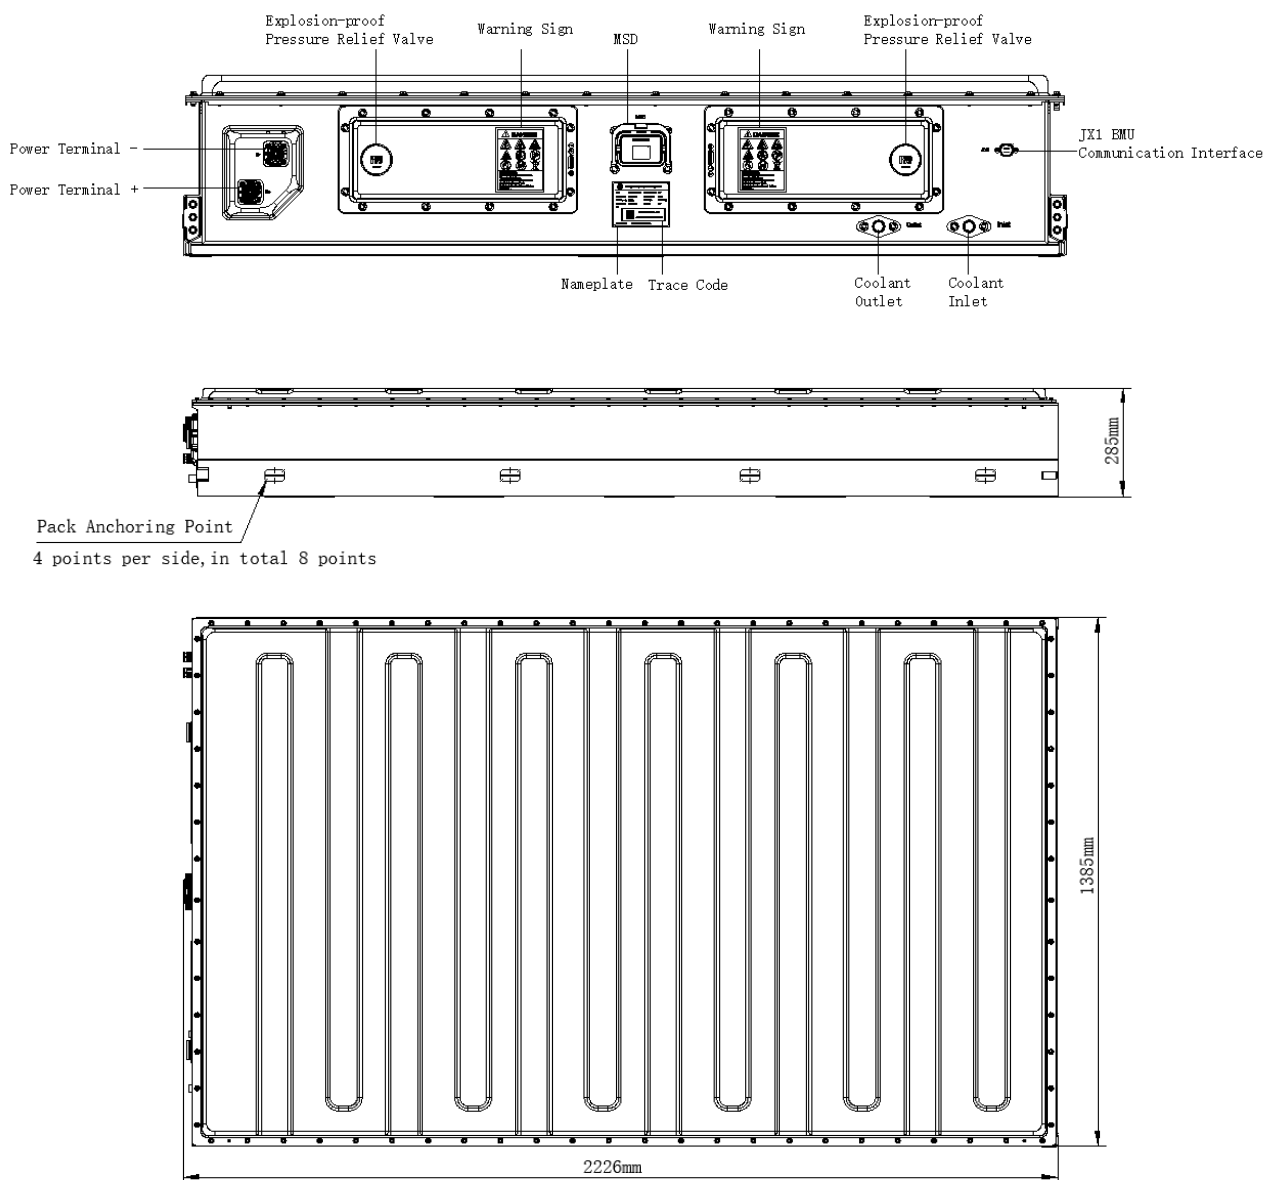


Figure 3. Interface and dimensions of the battery pack

3. STORAGE REQUIREMENTS

Environmental Requirements

Packs shall be stored in a clean, ventilated and cool environment to avoid direct sunlight, high temperature, corrosive gas, severe vibration, mechanical impact and heavy pressure.

Product Protection Requirements

When the pack is stored separately before integrating to the system, the coolant inlet and outlet, positive and negative terminals, and all other interfaces shall be protected by sealing caps to prevent dust and other foreign particles from entering.

SOC and Voltage Difference Requirements during Storage

Pack should be regularly checked for SOC and voltage difference, whether stored separately or assembled into the system.