


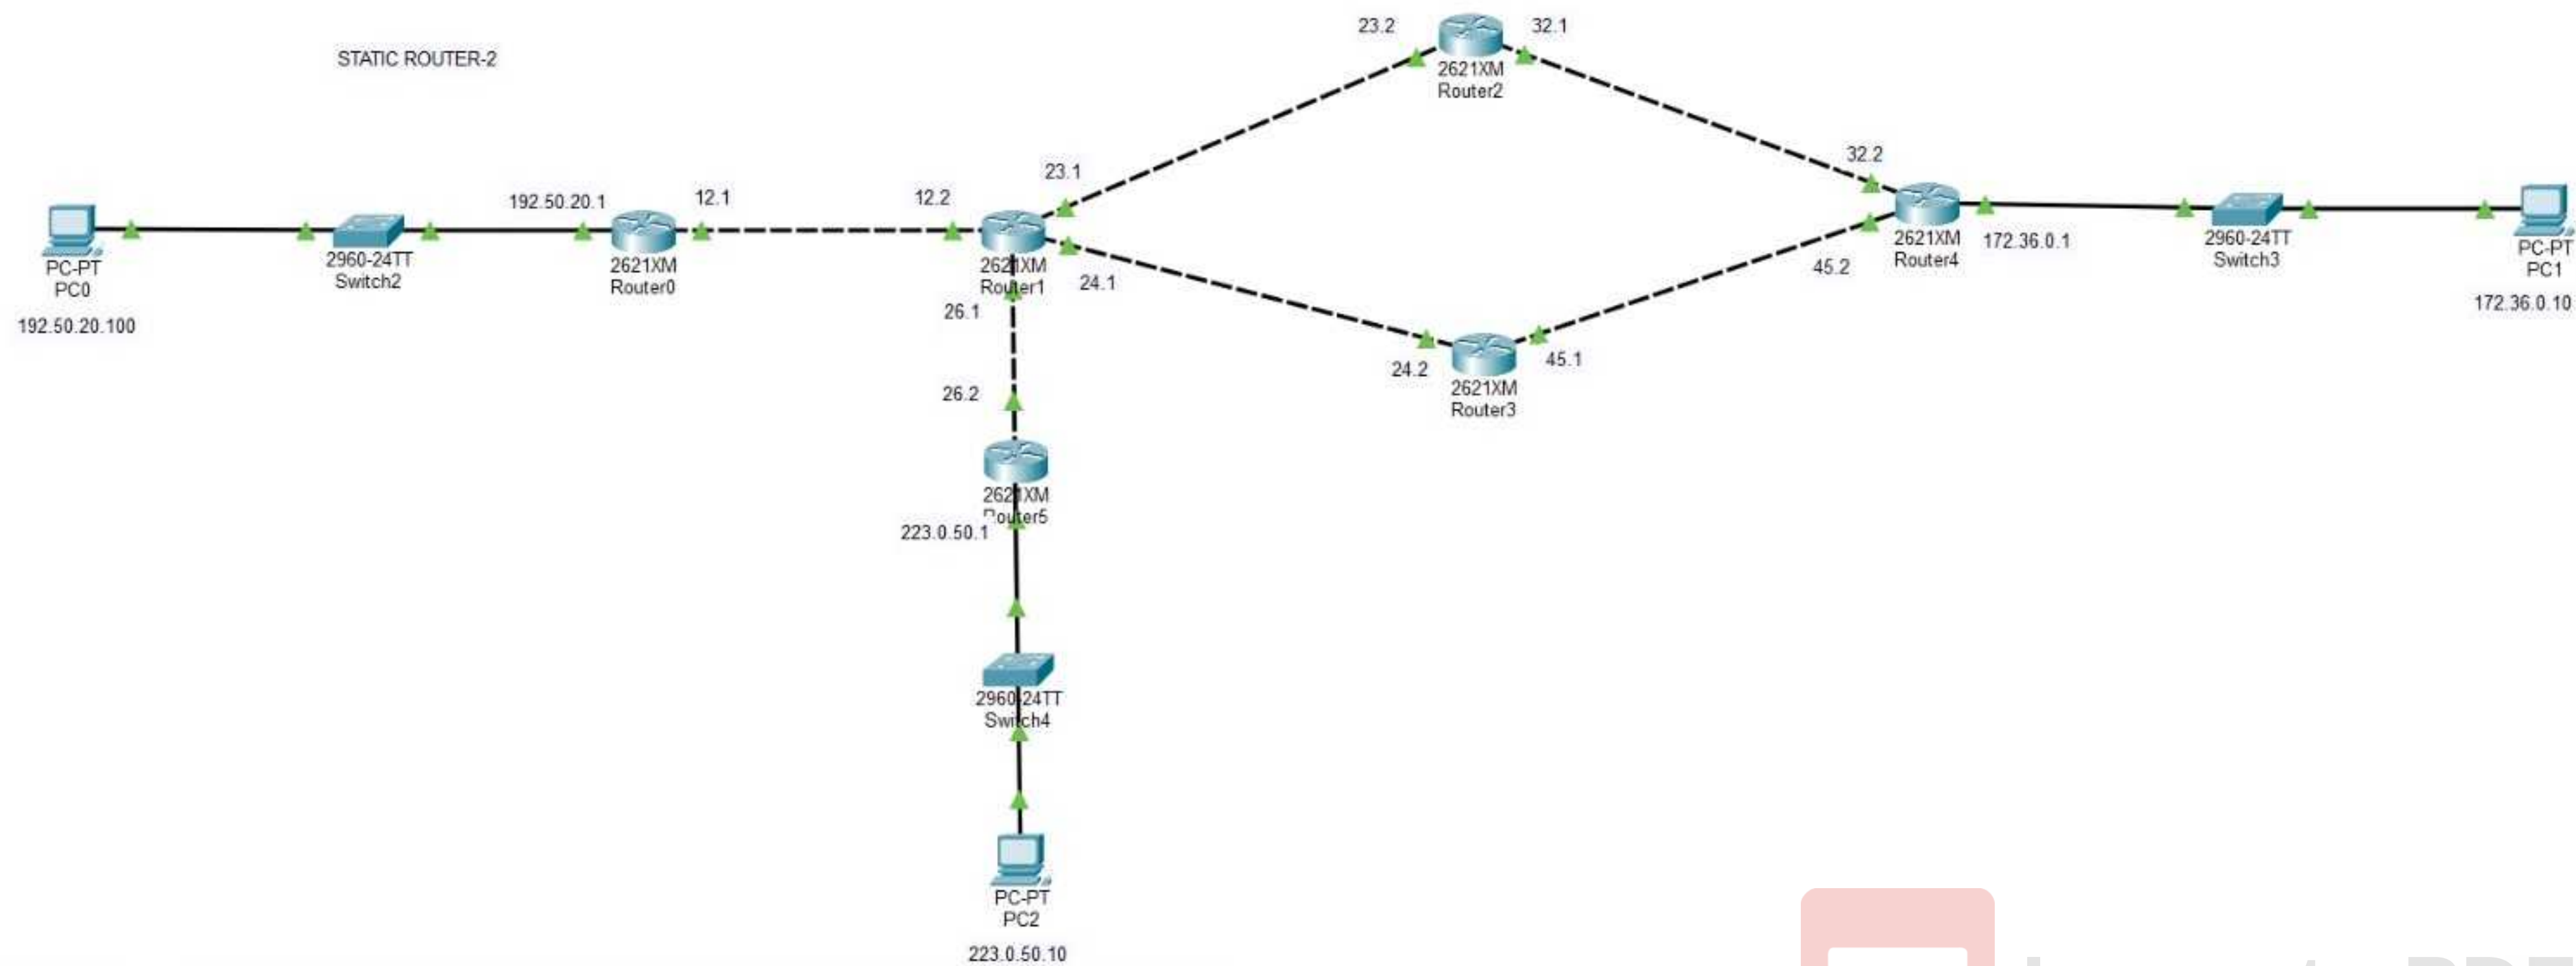

Cisco Packet Tracer PC Command Line 1.0

C:\>ipconfig

FastEthernet0 Connection:(default port)

Connection-specific DNS Suffix...:

Link-local IPv6 Address.....: FE80::20A:F3FF:FE87:322C

IPv6 Address.....: ::

IPv4 Address.....: 223.0.50.10

Subnet Mask.....: 255.255.255.0

Default Gateway.....: ::

223.0.50.1

Bluetooth Connection:

Connection-specific DNS Suffix...:

Link-local IPv6 Address.....: ::

IPv6 Address.....: ::

IPv4 Address.....: 0.0.0.0

Subnet Mask.....: 0.0.0.0

Default Gateway.....: ::

0.0.0.0

C:\>ping 192.50.20.100

Pinging 192.50.20.100 with 32 bytes of data:

Reply from 192.50.20.100: bytes=32 time<1ms TTL=125

Reply from 192.50.20.100: bytes=32 time<1ms TTL=125

Reply from 192.50.20.100: bytes=32 time=1ms TTL=125

Reply from 192.50.20.100: bytes=32 time=1ms TTL=125

Ping statistics for 192.50.20.100:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),

Approximate round trip times in milli-seconds:

Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 172.36.0.10

Pinging 172.36.0.10 with 32 bytes of data:

Reply from 172.36.0.10: bytes=32 time<1ms TTL=124

Reply from 172.36.0.10: bytes=32 time<1ms TTL=124

Reply from 172.36.0.10: bytes=32 time=1ms TTL=124

Reply from 172.36.0.10: bytes=32 time=1ms TTL=124

Ping statistics for 172.36.0.10:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),

Approximate round trip times in milli-seconds:

Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>


```
C:\>
C:\>
C:\>
C:\>
C:\>ipconfig
```

FastEthernet0 Connection: (default port)

```
Connection-specific DNS Suffix...:
Link-local IPv6 Address.....: FE80::2D0:D3FF:FEC5:EE45
IPv6 Address.....: ::
IPv4 Address.....: 192.50.20.100
Subnet Mask.....: 255.255.255.0
Default Gateway.....: ::
                        192.50.20.1
```

Bluetooth Connection:

```
Connection-specific DNS Suffix...:
Link-local IPv6 Address.....: ::
IPv6 Address.....: ::
IPv4 Address.....: 0.0.0.0
Subnet Mask.....: 0.0.0.0
Default Gateway.....: ::
                        0.0.0.0
```

```
C:\>ping 223.0.50.10
```

Pinging 223.0.50.10 with 32 bytes of data:

```
Reply from 223.0.50.10: bytes=32 time<1ms TTL=125
Reply from 223.0.50.10: bytes=32 time<1ms TTL=125
Reply from 223.0.50.10: bytes=32 time<1ms TTL=125
Reply from 223.0.50.10: bytes=32 time<1ms TTL=125
```

Ping statistics for 223.0.50.10:

```
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
C:\>ping 172.36.0.10
```

Pinging 172.36.0.10 with 32 bytes of data:

```
Reply from 172.36.0.10: bytes=32 time<1ms TTL=124
Reply from 172.36.0.10: bytes=32 time=1ms TTL=124
Reply from 172.36.0.10: bytes=32 time=1ms TTL=124
Reply from 172.36.0.10: bytes=32 time=2ms TTL=124
```

Ping statistics for 172.36.0.10:

```
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 2ms, Average = 1ms
```

```
C:\>|
```

Command Prompt

Cisco Packet Tracer PC Command Line 1.0

C:\>

C:\>

C:\>ipconfig

FastEthernet0 Connection:(default port)

Connection-specific DNS Suffix...:

Link-local IPv6 Address.....: FE80::209:7CFF:FE1C:307E

IPv6 Address.....: ::

IPv4 Address.....: 172.36.0.10

Subnet Mask.....: 255.255.0.0

Default Gateway.....: ::

172.36.0.1

Bluetooth Connection:

Connection-specific DNS Suffix...:

Link-local IPv6 Address.....: ::

IPv6 Address.....: ::

IPv4 Address.....: 0.0.0.0

Subnet Mask.....: 0.0.0.0

Default Gateway.....: ::

0.0.0.0

C:\>ping 192.50.20.100

Pinging 192.50.20.100 with 32 bytes of data:

Reply from 192.50.20.100: bytes=32 time<1ms TTL=124

Reply from 192.50.20.100: bytes=32 time=9ms TTL=124

Reply from 192.50.20.100: bytes=32 time<1ms TTL=124

Reply from 192.50.20.100: bytes=32 time=10ms TTL=124

Ping statistics for 192.50.20.100:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),

Approximate round trip times in milli-seconds:

Minimum = 0ms, Maximum = 10ms, Average = 4ms

C:\>ping 223.0.50.1

Pinging 223.0.50.1 with 32 bytes of data:

Reply from 223.0.50.1: bytes=32 time=2ms TTL=252

Reply from 223.0.50.1: bytes=32 time=1ms TTL=252

Reply from 223.0.50.1: bytes=32 time<1ms TTL=252

Reply from 223.0.50.1: bytes=32 time<1ms TTL=252

Ping statistics for 223.0.50.1:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),

Approximate round trip times in milli-seconds:

Minimum = 0ms, Maximum = 2ms, Average = 0ms

C:\>