


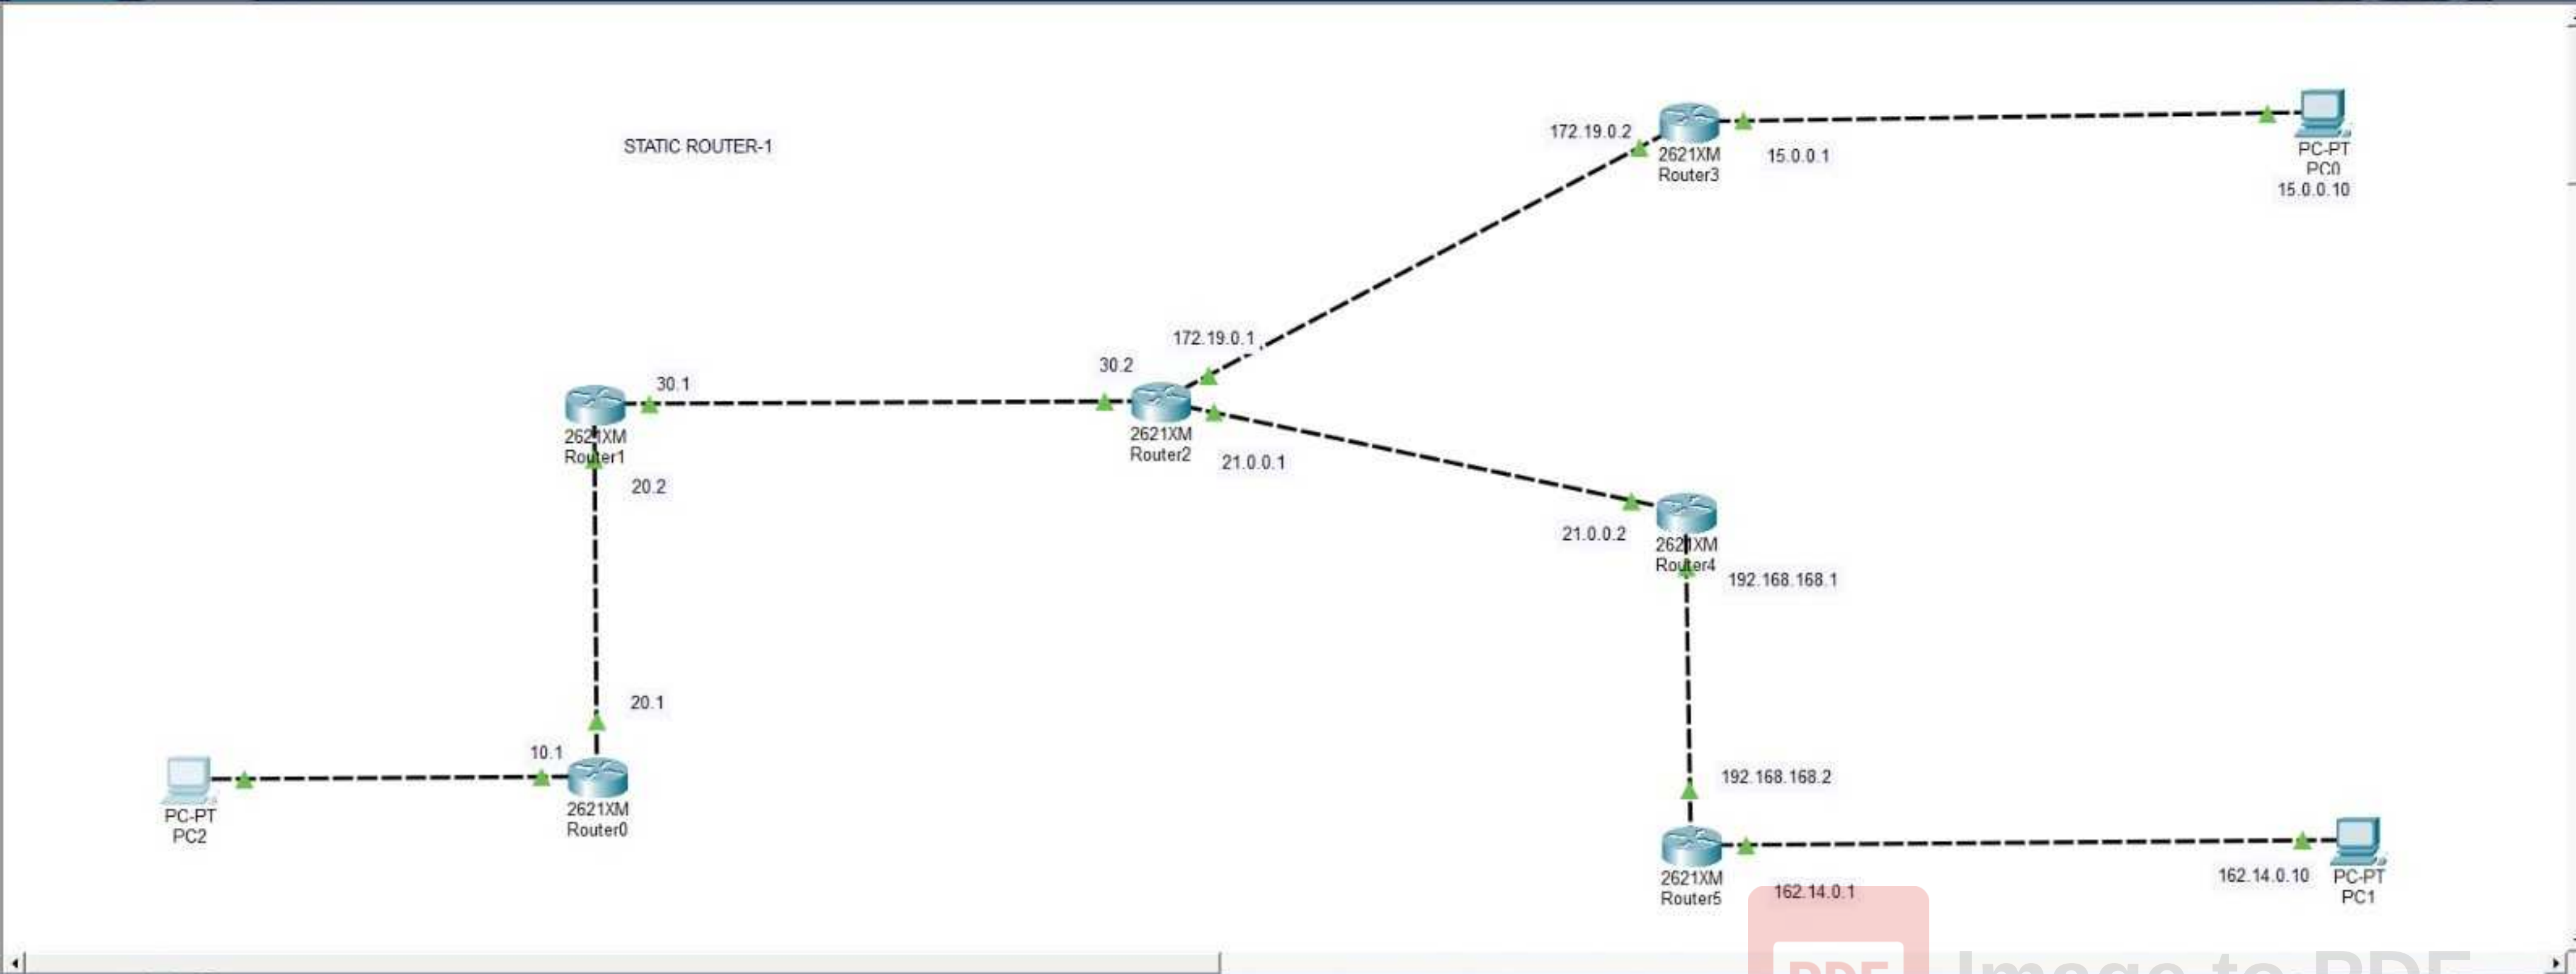

Command Prompt

```
C:\>ipconfig
```

```
FastEthernet0 Connection: (default port)
```

```
Connection-specific DNS Suffix...:
```

```
Link-local IPv6 Address.....: FE80::202:16FF:FEA5:39AA
```

```
IPv6 Address.....: ::
```

```
IPv4 Address.....: 10.0.0.10
```

```
Subnet Mask.....: 255.0.0.0
```

```
Default Gateway.....: ::
```

```
10.0.0.1
```

```
Bluetooth Connection:
```

```
Connection-specific DNS Suffix...:
```

```
Link-local IPv6 Address.....: ::
```

```
IPv6 Address.....: ::
```

```
IPv4 Address.....: 0.0.0.0
```

```
Subnet Mask.....: 0.0.0.0
```

```
Default Gateway.....: ::
```

```
0.0.0.0
```

```
C:\>ping 162.14.0.10
```

```
Pinging 162.14.0.10 with 32 bytes of data:
```

```
Reply from 162.14.0.10: bytes=32 time<1ms TTL=123
```

```
Reply from 162.14.0.10: bytes=32 time<1ms TTL=123
```

```
Reply from 162.14.0.10: bytes=32 time<1ms TTL=123
```

```
Reply from 162.14.0.10: bytes=32 time=1ms TTL=123
```

```
Ping statistics for 162.14.0.10:
```

```
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
```

```
Approximate round trip times in milli-seconds:
```

```
Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

```
C:\>ping 15.0.0.10
```

```
Pinging 15.0.0.10 with 32 bytes of data:
```

```
Reply from 15.0.0.10: bytes=32 time=16ms TTL=124
```

```
Reply from 15.0.0.10: bytes=32 time<1ms TTL=124
```

```
Reply from 15.0.0.10: bytes=32 time<1ms TTL=124
```

```
Reply from 15.0.0.10: bytes=32 time<1ms TTL=124
```

```
Ping statistics for 15.0.0.10:
```

```
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
```

```
Approximate round trip times in milli-seconds:
```

```
Minimum = 0ms, Maximum = 16ms, Average = 4ms
```

```
C:\>
```

```
C:\>
```

```
C:\>
```

```
C:\>
```

```
C:\>
```


Cisco Packet Tracer PC Command Line 1.0

C:\>ipconfig

FastEthernet0 Connection: (default port)

Connection-specific DNS Suffix...:

Link-local IPv6 Address.....: FE80::201:43FF:FED6:303A

IPv6 Address.....: ::

IPv4 Address.....: 15.0.0.10

Subnet Mask.....: 255.0.0.0

Default Gateway.....: ::
15.0.0.1

Bluetooth Connection:

Connection-specific DNS Suffix...:

Link-local IPv6 Address.....: ::

IPv6 Address.....: ::

IPv4 Address.....: 0.0.0.0

Subnet Mask.....: 0.0.0.0

Default Gateway.....: ::
0.0.0.0

C:\>ping 10.0.0.10

Pinging 10.0.0.10 with 32 bytes of data:

Reply from 10.0.0.10: bytes=32 time<1ms TTL=124

Reply from 10.0.0.10: bytes=32 time<1ms TTL=124

Reply from 10.0.0.10: bytes=32 time=1ms TTL=124

Reply from 10.0.0.10: bytes=32 time<1ms TTL=124

Ping statistics for 10.0.0.10:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),

Approximate round trip times in milli-seconds:

Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 162.14.0.10

Pinging 162.14.0.10 with 32 bytes of data:

Reply from 162.14.0.10: bytes=32 time=1ms TTL=124

Reply from 162.14.0.10: bytes=32 time=1ms TTL=124

Reply from 162.14.0.10: bytes=32 time<1ms TTL=124

Reply from 162.14.0.10: bytes=32 time<1ms TTL=124

Ping statistics for 162.14.0.10:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),

Approximate round trip times in milli-seconds:

Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>

Physical Config Desktop Programming Attributes

Command Prompt

C:\>ipconfig

FastEthernet0 Connection: (default port)

```
Connection-specific DNS Suffix...:
Link-local IPv6 Address . . . . .: FE80::260:2FFF:FE89:364A
IPv6 Address . . . . .: ::
IPv4 Address . . . . .: 162.14.0.10
Subnet Mask . . . . .: 255.255.0.0
Default Gateway . . . . .: ::
                             162.14.0.1
```

Bluetooth Connection:

```
Connection-specific DNS Suffix...:
Link-local IPv6 Address . . . . .: ::
IPv6 Address . . . . .: ::
IPv4 Address . . . . .: 0.0.0.0
Subnet Mask . . . . .: 0.0.0.0
Default Gateway . . . . .: ::
                             0.0.0.0
```

C:\>ping 10.0.0.10

Pinging 10.0.0.10 with 32 bytes of data:

```
Reply from 10.0.0.10: bytes=32 time<1ms TTL=123
Reply from 10.0.0.10: bytes=32 time<1ms TTL=123
Reply from 10.0.0.10: bytes=32 time<1ms TTL=123
Reply from 10.0.0.10: bytes=32 time=1ms TTL=123
```

Ping statistics for 10.0.0.10:

```
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

C:\>ping 15.0.0.10

Pinging 15.0.0.10 with 32 bytes of data:

```
Reply from 15.0.0.10: bytes=32 time<1ms TTL=124
Reply from 15.0.0.10: bytes=32 time=1ms TTL=124
Reply from 15.0.0.10: bytes=32 time<1ms TTL=124
Reply from 15.0.0.10: bytes=32 time<1ms TTL=124
```

Ping statistics for 15.0.0.10:

```
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

C:\>

C:\>

C:\>

C:\>

C:\>