




EUROPEAN PHD SCHOOL

**Power Electronics, Electrical
Machines, Energy Control and
Power Systems**

27 - 31 MAY 2024

RESEARCH ACTIVITY FORM

PhD personal information

	First name	Arvind
	Last name	Balachandran
	Institution	Linköping University
	Country	Sweden
	Gender	Male
	Estimated date of completion of the PhD Program	30 th March 2024.
	Title of your research program	Battery-Integrated Modular Multilevel Converters for Commercial Automotive Applications
	Keywords of your research activity	Modular Multilevel Converters, Battery, Electric Vehicles, Electric Machine Drives.

Research activity description
FlexBatt: Power Electronics for Flexible and Sustainable Batteries

Arvind Balachandran

May 2024

1 Background

Road freight transportation is the backbone of trade and commerce in the European Continent, and heavy-duty vehicles (HDVs) carry about 71.3% of the freight transport over land [ACEA, 2022]. Moreover, about 98% of the HDV fleet is powered by diesel, contributing to about 25% of the EU automotive greenhouse-gas emissions [C2ES, 2023]. As part of the effort to reduce greenhouse gas emissions, intergovernmental organizations, such as the European Commission, have introduced stricter legislation standards to reduce the negative impact on climate and the environment by ensuring zero-emission mobility within the next few years [Commission, 2011]. As a result, several leading heavy-duty vehicle manufacturers, such as Scania CV AB, have announced plans to transition to 100% electric heavy-duty vehicle sales by 2040 [Ragon and Rodríguez, 2021]. In collaboration with Scania CV AB, this project aims to demonstrate, develop, and contribute to making society's road freight transportation efficient, durable, cost-effective, and fossil-free.

A significant challenge the automotive industry faces in transitioning to electrification and, thus, to a sustainable society is the cost and lifespan of battery packs in electric vehicles. The battery pack's state of health (SOH) is a critical parameter determining the battery's end-of-life and is often determined by the weakest cell in the pack. When the SOH of the battery pack falls below 80% (often the SOH of the weakest cell), the pack is considered at the end of life and

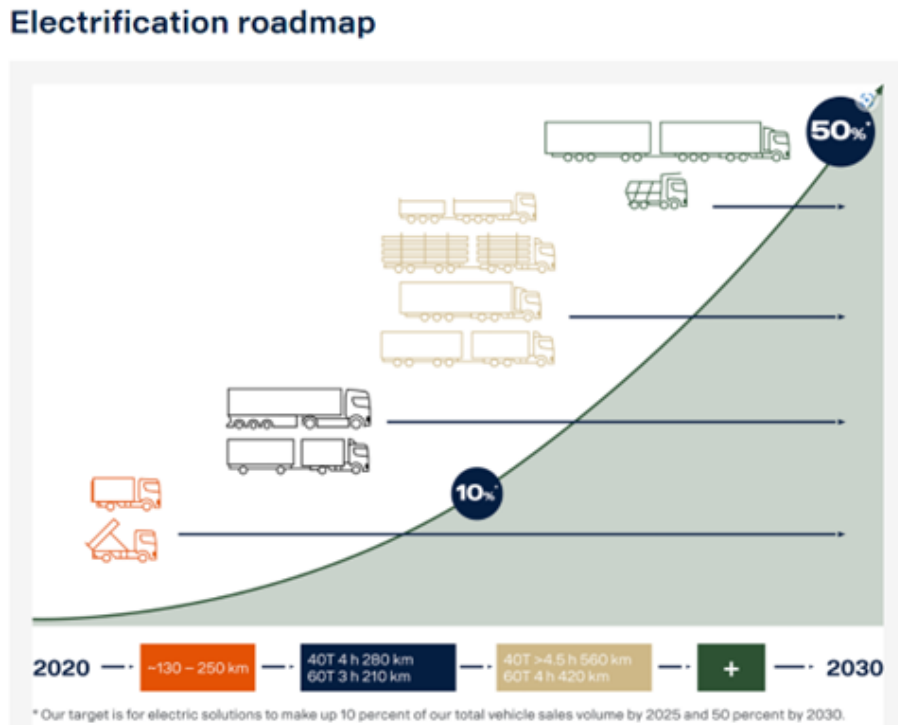


Figure 1: Scania's roadmap for electrifying the commercial vehicle fleet.

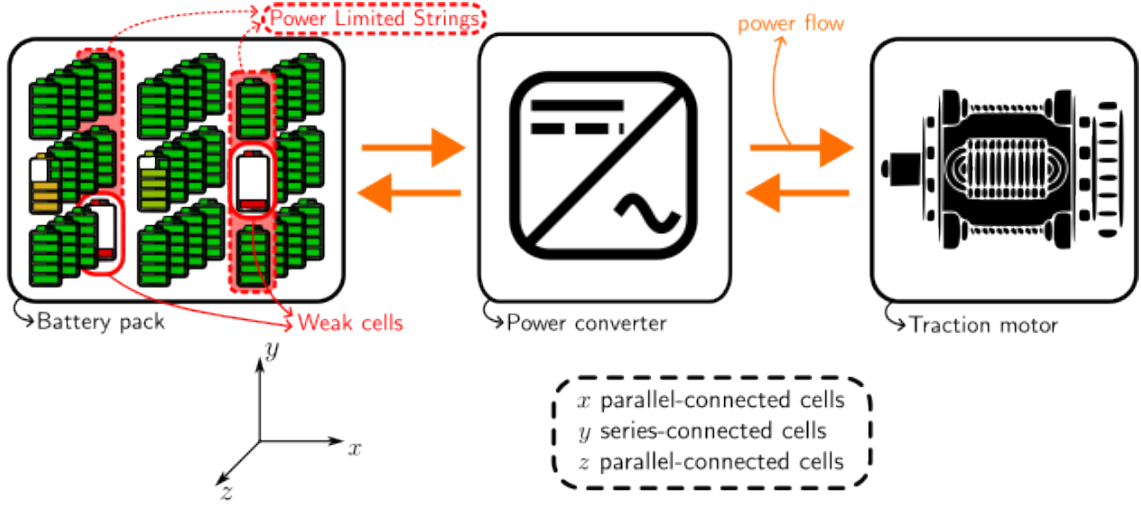


Figure 2: Conventional electric vehicle powertrain with a large battery pack containing weak cells shown in red.

should be replaced. This results in additional expenses for the consumer and creates an extra environmental burden [Canals Casals et al., 2022]. To understand this problem in detail, consider a conventional electric vehicle with a large battery pack with several thousand hard-wired series- and parallel-connected cells (Figure 2). Due to variations in the manufacturing of the cells and several other factors, the distribution of voltages and the state of charge among the cells are non-homogeneous and vary during operation [Schuster et al., 2015] and in Figure 3, the internal resistance and state of health (SOH) for 100 series connected cells in a battery pack after two years of use is shown. From the figure, the relative difference in the SOH between the healthiest and the weakest cell in the pack is about 8%. More concerning, the internal resistance of the weakest cell is almost two times greater than the healthiest, resulting in non-uniform heat distribution, leading to the formation of hotspots and overheating, thus limiting both the power and energy the pack can deliver. Furthermore, every cell has a minimum and maximum voltage limit, and these limits

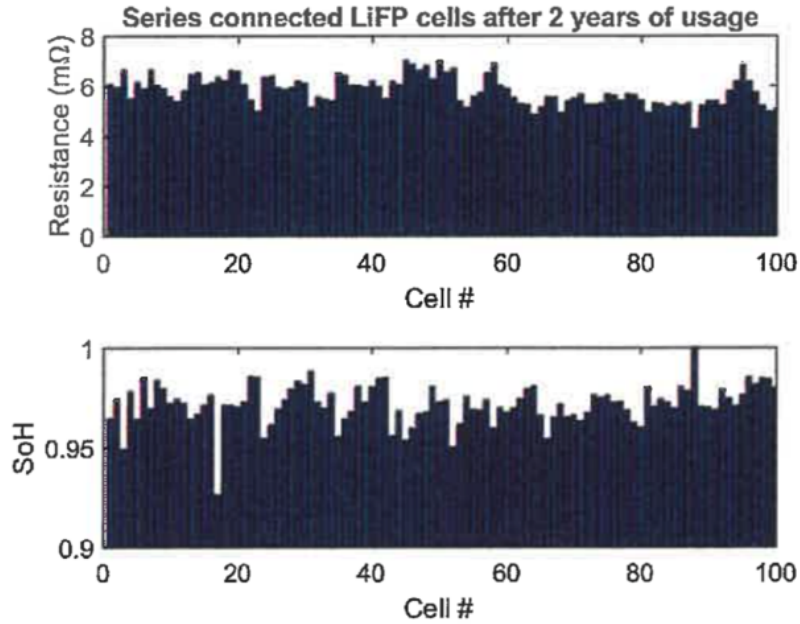


Figure 3: Internal resistance and state-of-health (SOH) for 100 series connected cells after two years of use.

must be maintained to prevent the battery from being destroyed [Garche and Brandt, 2018]. The weak cells (shown in red in Figure 2) reach this limit faster than others, and even if one of cell in the pack reaches the limit, the pack cannot be used, rendering the entire pack useless.

Another pivotal element within the electric vehicle powertrain is the electric machine, which not only carries a significant cost but also holds substantial volume importance. Electric machines have been used in industrial applications for nearly a century. While controlling the electric machine around the rated power is straightforward, extracting the maximum performance presents a significant challenge. This is overcome by introducing power electronic converter-based electric machine drives, which is also used in hybrid and electric vehicle. The conventional electric vehicle powertrain uses a 2-level inverter (shown in Figure 2) and these converters have high-voltage switching steps (voltage steps of 600 to 1000 V) that may cause high stresses of bearings. If mitigation measures are not taken, electric machines can fail [Bell et al., 2001], and replacing the electric machine can get expensive.

To overcome these challenges, the following countermeasures are considered during the design phase:

1. Increased conduction insulation, which increases the size and weight of the electric machine.
2. Decoupling the electrostatic fields from the rotor by shielding also increases the electric machine's size and weight.
3. Adding filters and chokes, which increases the cost of the electric vehicle powertrain.

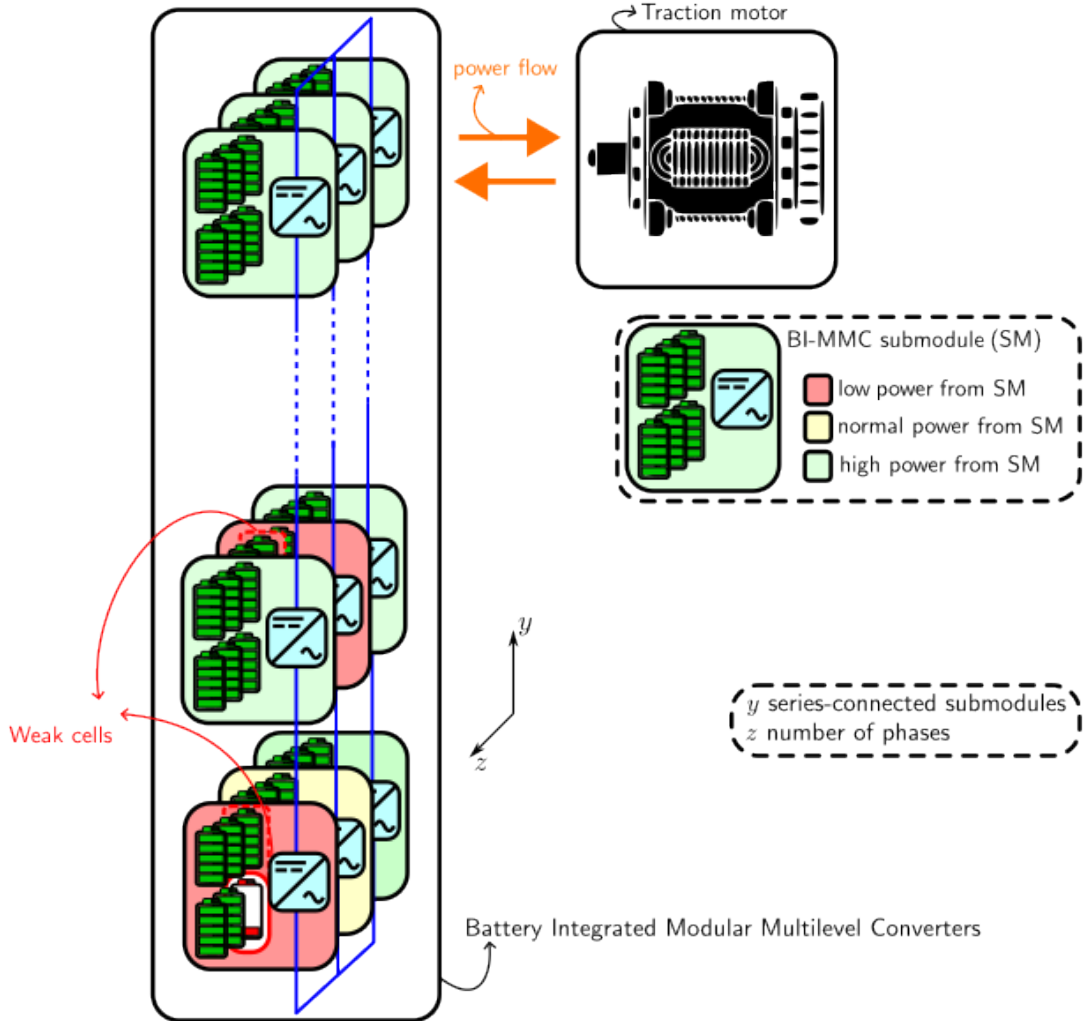


Figure 4: Battery-integrated modular multilevel converter (BI-MMC) based battery electric vehicle powertrain with a BI-MMC with small battery packs in submodules and a traction motor.

4. Reducing the dv/dt switching effects at the drive by minimizing drive input voltages, increasing the power converter losses.

Harmonic distortion is the degree to which undesirable harmonics are created during power conversion. The higher the harmonic distortion, the higher the losses in the electric machine. The 2-level inverter in conventional electric vehicle powertrains has high harmonic distortion, resulting in increased losses in the electric machine.

The project aims to develop a system that enables individual cell control, thereby improving the battery pack’s robustness, lifetime, and energy utilization. The selected approach for achieving individual cell control is by using battery-integrated modular multilevel converters (BI-MMC). BI-MMCs have several cascaded stages of bi-directional DC to AC converters called submodules (SM) as shown in Figure 4. Each submodule consists of a few series- and parallel-connected cells. BI-MMCs can actively react to the driving scenario and redirect the energy flow among submodules and, in extreme cases, disconnect weak cells from the pack, thereby improving the energy efficiency, safety, and lifetime of the electric vehicles. Furthermore, BI-MMCs have considerably lower harmonic distortion, potentially reducing the losses and increasing the efficiency of the electric machine. The low-voltage switching steps (voltage steps of 5 to 60 V) potentially reduce the electric machine size, insulation, and core losses, thereby increasing the overall efficiency of the electric vehicle powertrain. The BI-MMC architecture can potentially extend the lifetime of the batteries by 71% compared to a conventional electric vehicle battery pack [Skegro et al., 2023]. This could lead to reduced electric vehicle total ownership costs and an extended lifetime.

2 State-of-the-art

Modular multilevel power electronic converters, established in the early 2000s, have yet to be extensively explored in electric vehicles with modular battery packs. This emerging approach has the potential to enhance electric vehicle efficiency and longevity. This section covers industry advancements, ongoing university research, and previous project contributions.

2.1 Industrial trends

In the past couple of years, the industry has witnessed an increase in the adoption of BI-MMC-based solutions. Notably, three out of the four companies listed below were founded in 2022 and have promised improvements in efficiency and longevity.

The Intelligent Battery Integrated System (IBIS) is a collaborative research project between Stellantis and Saft. This demonstrator has been operational since the summer of 2022 [EVs, 2023]. Currently, the IBIS project team is directing its efforts towards constructing a fully functional prototype vehicle and there are plans to integrate this technology into Stellantis vehicles by the end of this decade.

In collaboration with Kempten-based start-up BAVERTIS, ABT e-line develops an innovative alternative driveline employing multilevel technology [Sportsline, 2023b]. BAVERTIS specializes in developing battery modules, spanning voltage ranges from 3.6 V to 300 V AC or DC. With the incorporation of additional modules, the objective is to attain a driveline voltage of 1000 V. The alternative driveline promises higher performance, increased safety, and increased reliability. ABT e-line’s partnership with Volkswagen Commercial Vehicles further extends to the production of electrified versions of the Caddy and Transporter [Sportsline, 2023a].

TAE Power Solutions develops two technologies: Intelligent AC power (ACi) and Converter Battery Module (CBM). These technologies integrate energy storage and power electronics, facilitating rapid charging, optimizing performance, extending travel range, and enhancing battery longevity for both electric mobility and stationary applications [Technologies, 2023]. TAE Power Solutions collaborates alongside BMW and other partners to jointly develop advanced battery systems.

Brill Power, a spin-out enterprise from Oxford University, has a scalable solution tailored for extensive large-scale energy storage applications [Lawrence, 2023]. Their latest modular system, BESA BP6X1, combines battery management, power conversion, edge computing, monitoring, and analytics in one fully integrated solution. This comprehensive integration has optimal battery performance. Brill Power wants to expand the utilization of its modular system into commercial vehicles.

The mentioned industries have intentions to incorporate their prototypes and products into both regular cars and commercial vehicles. However, this project specifically concentrates on heavy-duty commercial vehicles. This project explores new control techniques for BI-MMCs and investigates their influence on the electric machine.

2.2 Current research

The charging time for electric vehicles is significantly longer than the refueling time for conventional vehicles. To achieve a short charging time, efficient DC fast chargers capable of delivering high power are required. To meet the changing needs of medium- and heavy-duty commercial vehicles, megawatt charging systems are under development [Meintz et al., 2022]. An advantage of BI-MMCs is that the requirement for an onboard charger for AC charging, necessary for conventional electric vehicle powertrain, becomes obsolete [Buberger et al., 2021]. However, DC charging is more challenging since the battery charging power flows through the submodules (power converter). Our previous research work on DC charging capabilities of different BI-MMC architectures [Balachandran et al., 2023] showed that a maximum power of 3 MW can be achieved. Several pieces of research indicate that pulsed charging can lead to enhanced battery lifetime, with potential improvements of up to 80% [Huang et al., 2020, Huang, 2021]. BI-MMCs, with their submodules, can facilitate pulsed charging. The goals of this research project are to understand the trade-offs between charging time, increased lifetime, and converter rating for pulsed charging using BI-MMCs and demonstrate the pulsed charging capabilities of BI-MMCs.

The design and control of a BI-MMC architecture with active balancing strategies are presented in [Quraan et al., 2015] and claimed an increase in lifetime compared to a conventional electric vehicle powertrain due to the inherent balancing between the cells. However, the paper considered half-bridge converters as submodules, this increases losses on the battery. [Josefsson, 2015] explored the concept of BI-MMCs with full-bridger submodules, or cascaded H-bridge inverters (CHB), for passenger cars and experimentally showed higher efficiencies compared to the conventional 2-level inverter. Several other BI-MMC architectures, such as modular multilevel series-parallel converters (MMSP) were investigated in [Korte et al., 2017, Kersten, 2021] and showed improvements in efficiency. Technical University of Kaiserslautern and Universität der Bundeswehr München, are looking into battery modular multilevel management (BM3) converters (similar to BI-MMCs) and have shown improved efficiency compared to conventional 2-level inverter [Kuder et al., 2020]. [Ma et al., 2018] showed that BI-MMCs have improved fault ride-through capabilities, potentially increasing both the reliability and lifetime of powertrains with BI-MMCs.

2.3 BattVolt Project

The Licentiate thesis [Balachandran, 2023] includes the following contributions:

1. The design and evaluation of 3-phase and 6-phase BI-MMC architectures; comparisons are made against a conventional 2-level inverter for a 40-ton 400 kW commercial vehicle. The evaluation considers the total number of submodules, energy rating of the DC-link capacitors, battery losses, capacitor losses, and semiconductor losses. The evaluation showed that the BI-MMCs have lower semiconductor losses than the conventional 2-level inverter. However, the BI-MMCs have higher capacitor and battery losses.
2. The impact that the number of series connected cells per submodule has on the total losses of the BI-MMC. The study showed that 5- to 6-series connected cells have the lowest losses.
3. The design principles for optimization of the DC-link capacitors and the MOSFET switching frequency; are supported by experimental validation for the loss distribution within a submodule.
4. The fourth contribution is a methodology for determining the battery impedance using the full-load converter current.
5. In a conventional battery pack, the battery is connected directly to the fast charger's DC supply. However, in a BI-MMC, the battery and the inverter are integrated, potentially increasing the DC charging capabilities because higher voltages can be achieved during charging than during operation. The fifth contribution is thus the derivation and investigation of

the maximum DC charging power of BI-MMCs assuming the same submodule semiconductor losses during traction. The analysis showed that most BI-MMCs have a maximum DC charging power of about 1MW.

References

- [ACEA, 2022] ACEA (2022). Trucks factsheet. https://acea.auto/files/factsheet_trucks.pdf.
- [Balachandran, 2023] Balachandran, A. (2023). Battery integrated modular multilevel converter topologies for automotive applications. Technical report.
- [Balachandran et al., 2023] Balachandran, A., Jonsson, T., and Eriksson, L. (2023). Dc charging capabilities of battery-integrated modular multilevel converters based on maximum tractive power. *Electricity*, 4(1):62–77.
- [Bell et al., 2001] Bell, S., Cookson, T. J., Cope, S. A., Epperly, R. A., Fischer, A., Schlegel, D. W., and Skibinski, G. L. (2001). Experience with variable-frequency drives and motor bearing reliability. *IEEE Transactions on industry applications*, 37(5):1438–1446.
- [Buberger et al., 2021] Buberger, J., Kersten, A., Kuder, M., Singer, A., Mashayekh, A., Estaller, J., Thiringer, T., Eckerle, R., and Weyh, T. (2021). Charging strategy for battery electric vehicles with a battery modular multilevel management (bm3) converter system using a pr controller. In *2021 23rd European Conference on Power Electronics and Applications (EPE'21 ECCE Europe)*, pages P–1. IEEE.
- [C2ES, 2023] C2ES (2023). Regulating transportation sector: Carbon emissions. <https://www.c2es.org/content/regulating-transportation-sector-carbon-emissions>.
- [Canals Casals et al., 2022] Canals Casals, L., Etxandi-Santolaya, M., Bibiloni-Mulet, P. A., Corchero, C., and Trilla, L. (2022). Electric vehicle battery health expected at end of life in the upcoming years based on uk data. *Batteries*, 8(10):164.
- [Commission, 2011] Commission, E. (2011). *Communication from the Commission to the European Parliament, the Council, the European Economic and Social Committee and the Committee of the Regions Youth Opportunities Initiative*. European Commission Brussels, Belgium.
- [EVs, 2023] EVs, C. (2023). Stellantis and saft unveil ev battery modules with integrated inverter and charger. <https://chargedevs.com/newswire/stellantis-and-saft-unveil-ev-battery-modules-with-integrated-inverter-and-charger/>.
- [Fossilfritt Sverige, 2022] Fossilfritt Sverige (2022). Strategi för fossilfri konkurrenskraft – en hållbar batterivärdekedja. Accessed 2023-01-12, report on <https://fossilfrittsverige.se/>.
- [Garche and Brandt, 2018] Garche, J. and Brandt, K. (2018). *Electrochemical Power Sources: Fundamentals, Systems, and Applications: Li-Battery Safety*. Elsevier.
- [Huang, 2021] Huang, X. (2021). The effects of pulsed charging current on the performance and lifetime of lithium-ion batteries.
- [Huang et al., 2020] Huang, X., Li, Y., Acharya, A. B., Sui, X., Meng, J., Teodorescu, R., and Stroe, D.-I. (2020). A review of pulsed current technique for lithium-ion batteries. *Energies*, 13(10):2458.
- [ICCT, 2021] ICCT, T. (2021). Why are electric vehicles the only way to quickly and substantially decarbonize transport?
- [Josefsson, 2015] Josefsson, O. (2015). *Investigation of a multilevel inverter for electric vehicle applications*. Chalmers Tekniska Högskola (Sweden).
- [Kersten, 2021] Kersten, A. (2021). Modular battery systems for electric vehicles based on multi-level inverter topologies-opportunities and challenges. *PQDT-Global*.

- [Korte et al., 2017] Korte, C., Specht, E., Hiller, M., and Goetz, S. (2017). Efficiency evaluation of mmshpc/chb topologies for automotive applications. In *2017 IEEE 12th International Conference on Power Electronics and Drive Systems (PEDS)*, pages 324–330. IEEE.
- [Kuder et al., 2020] Kuder, M., Schneider, J., Kersten, A., Thiringer, T., Eckerle, R., and Weyh, T. (2020). Battery modular multilevel management (bm3) converter applied at battery cell level for electric vehicles and energy storages. In *PCIM Europe digital days 2020; International Exhibition and Conference for Power Electronics, Intelligent Motion, Renewable Energy and Energy Management*, pages 1–8. VDE.
- [Lawrence, 2023] Lawrence, C. (2023). Brill power unveils game-changing tech for large scale battery operations. <https://tech.eu/2023/07/10/brill-power-unveils-game-changing-tech-for-large-scale-battery-operations/>.
- [Ma et al., 2018] Ma, Y., Lin, H., Wang, X., Wang, Z., and Ze, Z. (2018). Analysis of battery fault tolerance in modular multilevel converter with integrated battery energy storage system. In *2018 20th European Conference on Power Electronics and Applications (EPE'18 ECCE Europe)*, pages P–1. IEEE.
- [Meintz et al., 2022] Meintz, A., Starke, M., and Bohn, T. (2022). Charging infrastructure technologies: Development of a multiport, 1 mw charging system for medium-and heavy-duty electric vehicles. Technical report, National Renewable Energy Lab.(NREL), Golden, CO (United States).
- [Quraan et al., 2015] Quraan, M., Yeo, T., and Tricoli, P. (2015). Design and control of modular multilevel converters for battery electric vehicles. *IEEE Transactions on Power Electronics*, 31(1):507–517.
- [Ragon and Rodríguez, 2021] Ragon, P.-L. and Rodríguez, F. (2021). CO2 emissions from trucks in the EU: An analysis of the heavy-duty CO2 standards baseline data.
- [Schuster et al., 2015] Schuster, S. F., Brand, M. J., Berg, P., Gleissenberger, M., and Jossen, A. (2015). Lithium-ion cell-to-cell variation during battery electric vehicle operation. *Journal of Power Sources*, 297:242–251.
- [Skegro et al., 2023] Skegro, A., Zou, C., and Wik, T. (2023). Analysis of potential lifetime extension through dynamic battery reconfiguration. In *25th European Conference on Power Electronics and Applications (EPE'23 ECCE Europe)*, pages 1–11. IEEE.
- [Sportsline, 2023a] Sportsline, A. (2023a). e-line - english. <https://www.abt-eline.com/>.
- [Sportsline, 2023b] Sportsline, A. (2023b). For innovative multilevel technology: Abt e-line cooperates with munich start-up bavertis. <https://www.abt-sportsline.com/news/for-innovative-multilevel-technology-abt-e-line-cooperates-with-munich-start-up-bavertis>.
- [Sveriges miljömål, 2022] Sveriges miljömål (2022). Utsläpp av växthusgaser från inrikes transporter - Sveriges miljömål. Accessed 2022-12-08: <https://www.sverigesmiljomal.se/etappmalen/utslapp-av-vaxthusgaser-fran-inrikes-transporter/>.
- [Technologies, 2023] Technologies, T. (2023). Introducing tae power solutions, a power management spin-off company from fusion energy leader tae technologies. <https://www.prnewswire.com/news-releases/introducing-tae-power-solutions-a-power-management-spin-off-company-from-fusion-energy-leader-tae-technologies-301728437.html>.