


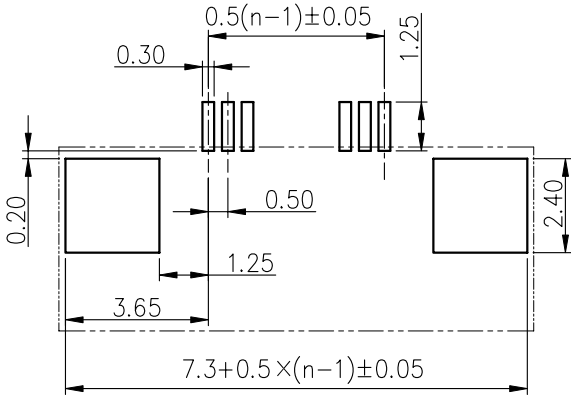
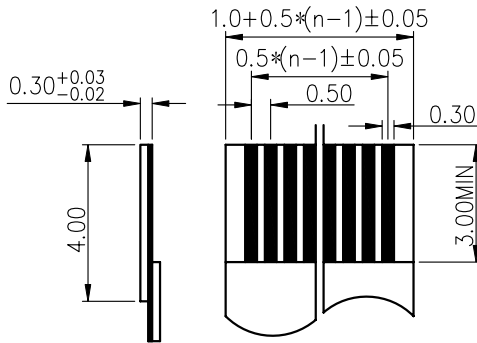
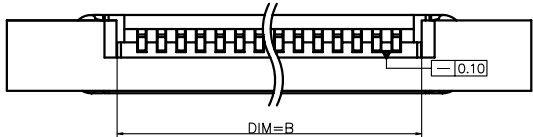
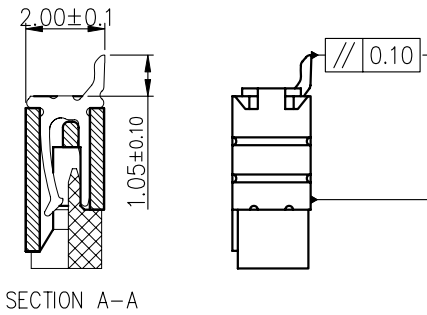
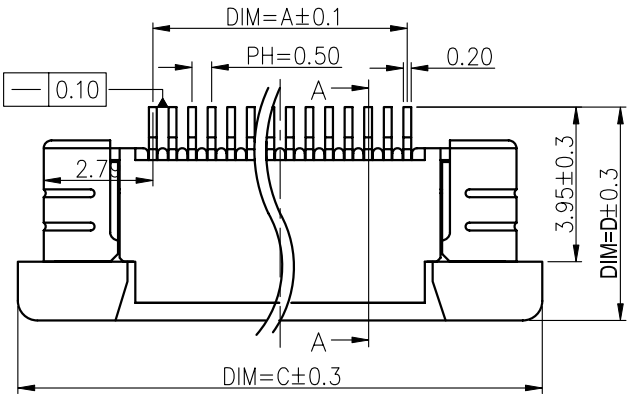


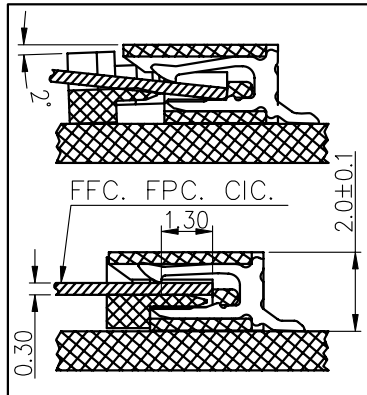
Specifications:  
Housing: LCP UL94-V0 Color: Nature  
Cove: LCP UL94-V0 Color: Black  
Contact: Phosphor Bronze  
Operating Voltage: 50V AC/DC  
Current Rating: 0.5A AC/DC  
Withstand Voltage: 200V AC/Minute  
Contact Resistance:  $\leq 40\text{m}\Omega$   
Insulation resistance:  $\geq 100\text{m}\Omega$   
Operating Temperature:  $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

PIN数	A	B	C	D	PIN数	A	B	C	D
004	1.50	2.57	8.40	5.45	035	17.00	18.07	23.90	5.95
005	2.00	3.07	8.90	5.45	036	17.50	18.57	24.40	5.95
006	2.50	3.57	9.40	5.45	037	18.00	19.07	24.90	5.95
007	3.00	4.07	9.90	5.45	038	18.50	19.57	25.40	5.95
008	3.50	4.57	10.40	5.45	039	19.00	20.07	25.90	5.95
009	4.00	5.07	10.90	5.45	040	19.50	20.57	26.40	5.95
010	4.50	5.57	11.40	5.45	041	20.00	21.07	26.90	5.95
011	5.00	6.07	11.90	5.45	042	20.50	21.57	27.40	5.95
012	5.50	6.57	12.40	5.45	043	21.00	22.07	27.90	5.95
013	6.00	7.07	12.90	5.45	044	21.50	22.57	28.40	5.95
014	6.50	7.57	13.40	5.45	045	22.00	23.07	28.90	5.95
015	7.00	8.07	13.90	5.45	046	22.50	23.57	29.40	5.95
016	7.50	8.57	14.40	5.45	047	23.00	24.07	29.90	5.95
017	8.00	9.07	14.90	5.45	048	23.50	24.57	30.40	5.95
018	8.50	9.57	15.40	5.45	049	24.00	25.07	30.90	5.95
019	9.00	10.07	15.90	5.45	050	24.50	25.57	31.40	5.95
020	9.50	10.57	16.40	5.45	051	25.00	26.07	31.90	5.95
021	10.00	11.07	16.90	5.45	052	25.50	26.57	32.40	5.95
022	10.50	11.57	17.40	5.45	053	26.00	27.07	32.90	5.95
023	11.00	12.07	17.90	5.45	054	26.50	27.57	33.40	5.95
024	11.50	12.57	18.40	5.45	055	27.00	28.07	33.90	5.95
025	12.00	13.07	18.90	5.45	056	27.50	28.57	34.40	5.95
026	12.50	13.57	19.40	5.45	057	28.00	29.07	34.90	5.95
027	13.00	14.07	19.90	5.45	058	28.50	29.57	35.40	5.95
028	13.50	14.57	20.40	5.45	059	29.00	30.07	35.90	5.95
029	14.00	15.07	20.90	5.45	060	29.50	30.57	36.40	5.95
030	14.50	15.57	21.40	5.95	061	30.00	31.07	36.90	5.95
031	15.00	16.07	21.90	5.95	062	30.50	31.57	37.40	5.95
032	15.50	16.57	22.40	5.95	063	31.00	32.07	37.90	5.95
033	16.00	17.07	22.90	5.95	064	31.50	32.57	38.40	5.95
034	16.50	17.57	23.40	5.95					

一般公差 TOLERANCES X. $\pm 0.40$ .XX $\pm 0.20$ .X $\pm 0.30$ .XXX $\pm 0.10$ ANGLES $\pm 2^{\circ}$		深圳市宏利电子有限公司 Shenzhen Holy Electronic Co.,Ltd	
检验尺寸标示 SYMBOLS   INDICATE CLASSIFICATION DIMENSION	工程 图号	FPC0520SQ-nP	制图 (DR) '08/5/16
MARK IS CRITICAL DIM. MARK IS MAJOR DIM.	品名	FPC0.5mm -nP 上接 全包	审核 (CHKD)
表面处理 (FINISH)	TITLE	FPC0.5mm Pitch H2.0 ZIF FOR SMT (UPPER CONN)	核准 (APPD) Rigo Lu
比例 (SCALE) 1:1	单位 (UNITS) mm		张数 (SHEET) 1 OF 1
			SIZE A4
			REV 0



PC BOARD LAYOUT



修改 REV	描述 REVISION DESCRIPTION	日期 DATE	签名 SIGNATURE
-----------	----------------------------	------------	-----------------